

Surface Mount

## Frequency Mixer

**ADE-192H+**

Level 17 (LO Power +17 dBm) 100 to 1910 MHz

### The Big Deal

- High IP3, +23 dBm
- Low conversion loss, 8.6 dB
- Excellent P1dB compression, +17 dBm at input
- High L-R isolation, 35 dB



CASE STYLE: CD542

### Product Overview

Mini-Circuits' ADE-192H+ is a surface mount triple balanced frequency mixer providing high IP3 performance, ideal for minimizing 3rd order intermodulation distortion in multiple carrier environments and other systems where unwanted signals may be present. This model also provides high isolation, high P1dB compression point, and low conversion loss. The mixer comes in a compact, six-lead plastic case measuring 0.27 x 0.31 x 0.22", saving space in dense board layouts.

### Key Features

Feature	Advantages
High IP3, +23 dBm	Minimizes third order intermodulation distortion and enables high-dynamic range.
Low conversion loss, 8.6 dB	Enables lower NF front ends, improving system sensitivity.
Excellent P1dB compression, +17 dBm at input	Provides linear performance for a wide range of RF input power levels.
High isolation, • L-R, 35 dB • L-I, 33 dB	Preserves signal integrity from input to output and reduces undesired signal responses that can interfere with system performance.
Small size, 0.27 x 0.31 x 0.22"	Saves board space and accommodates tight layouts.

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



Surface Mount

# Frequency Mixer

## ADE-192H+

Level 17 (LO Power +17 dBm) 100 to 1910 MHz



Generic photo used for illustration purposes only  
CASE STYLE: CD542

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

**Available Tape and Reel at no extra cost**

Reel Size	Devices/Reel
7"	20, 50, 100, 200
13"	500, 1000

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	250mW

Permanent damage may occur if any of these limits are exceeded.


### Pad Connections

LO	6
RF	2
IF	3
GROUND	1,4,5

### Outline Drawing



### PCB Land Pattern



Suggested Layout,  
Tolerance to be within ±.002


### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54

H	J	K	L	wt
.030	.026	.065	.300	grams
0.76	0.66	1.65	7.62	0.20

### Demo Board MCL P/N: TB-03 Suggested PCB Layout (PL-052)

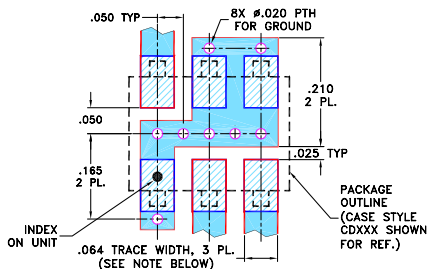

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/WCLStore/terms.jsp](http://www.minicircuits.com/WCLStore/terms.jsp)

### Features

- low conversion loss, 7.8 dB typ.
- excellent IP3, 26 dB typ.
- low profile package
- aqueous washable
- protected by US patent 6,133,525

### Applications

- PCS
- cellular


### Electrical Specifications at 25°C








Parameter	Min.	Typ.	Max.	Unit
Frequency Range, RF/LO	100	—	1910	MHz
Frequency Range, IF	50	—	1800	MHz
Conversion Loss	—	8.6	9.8	dB
LO to RF Isolation	24	35	—	dB
LO to IF Isolation	23	33	—	dB
IP3	—	23	—	dBm
RF Input Power at 1 dB Compression	—	+17	—	dBm

### Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +20dBm
100.00	150.00	8.19	30.77	28.93	1.02	1.16
170.00	220.00	8.24	31.21	29.22	1.03	1.19
205.00	255.00	8.14	31.46	29.36	1.04	1.17
310.00	360.00	8.10	32.12	29.77	1.11	1.19
415.00	465.00	8.04	33.02	30.34	1.20	1.20
555.00	605.00	8.07	35.02	31.33	1.31	1.27
625.00	675.00	7.91	36.19	31.60	1.37	1.31
730.00	780.00	7.98	37.96	32.05	1.46	1.39
800.00	850.00	7.92	39.31	32.25	1.53	1.36
905.00	955.00	7.83	41.10	32.34	1.53	1.51
1005.00	1055.00	7.68	40.64	31.88	1.53	1.65
1110.00	1160.00	7.61	36.11	32.49	1.55	1.67
1215.00	1265.00	7.60	36.93	33.69	1.64	1.61
1320.00	1370.00	7.55	39.08	35.06	1.83	1.59
1425.00	1475.00	7.48	39.30	35.87	1.91	1.66
1530.00	1580.00	7.53	37.77	36.54	1.92	1.75
1600.00	1650.00	7.44	38.76	38.14	2.05	1.70
1705.00	1755.00	7.48	38.58	39.17	1.88	1.77
1810.00	1860.00	7.62	38.18	38.75	1.77	1.89
1910.00	1960.00	7.97	38.56	36.96	1.87	2.05

### Electrical Schematic

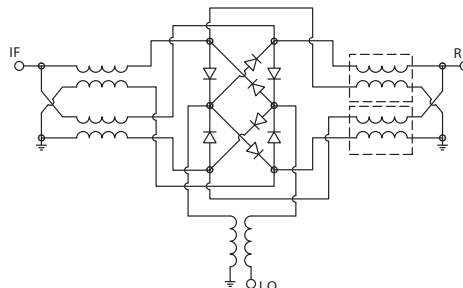

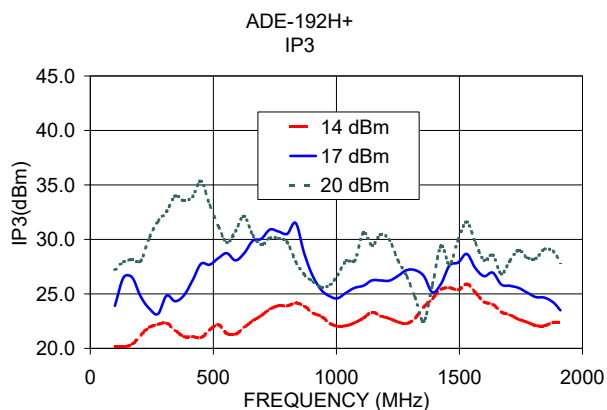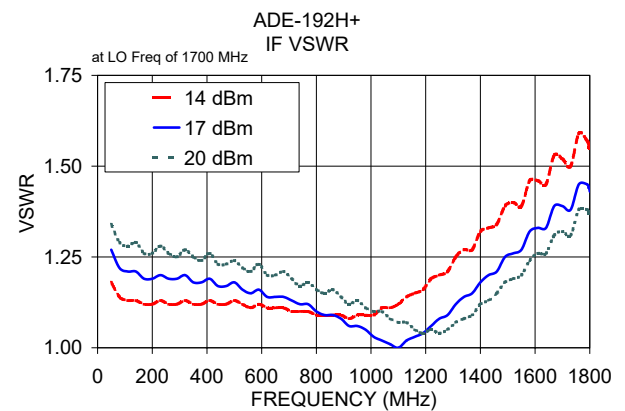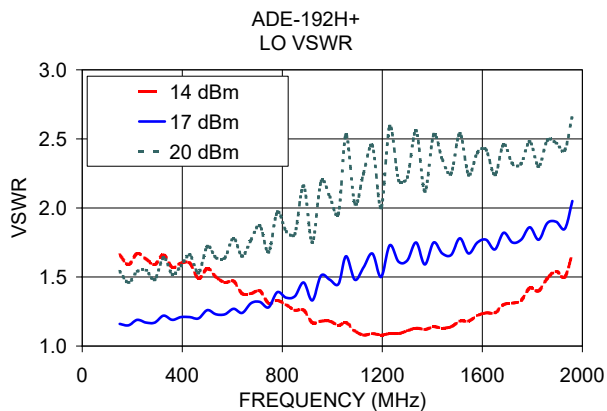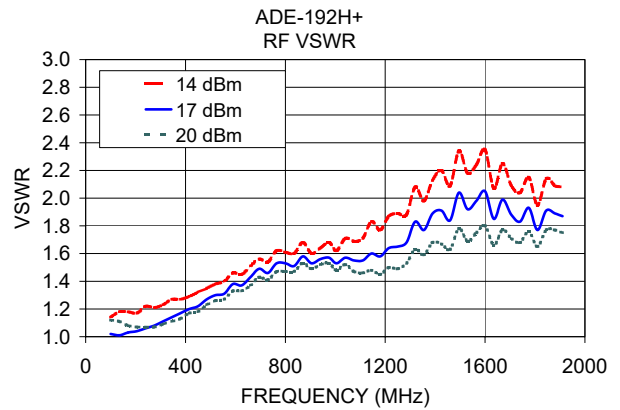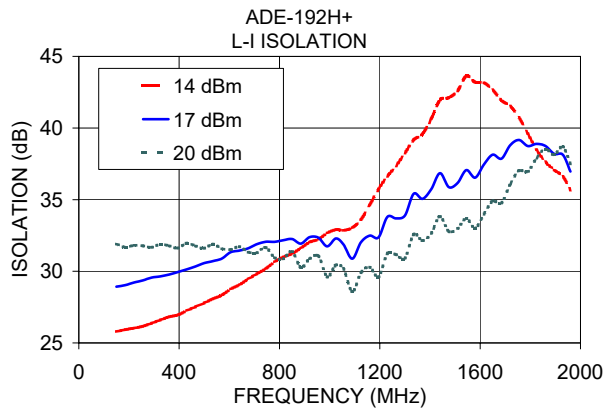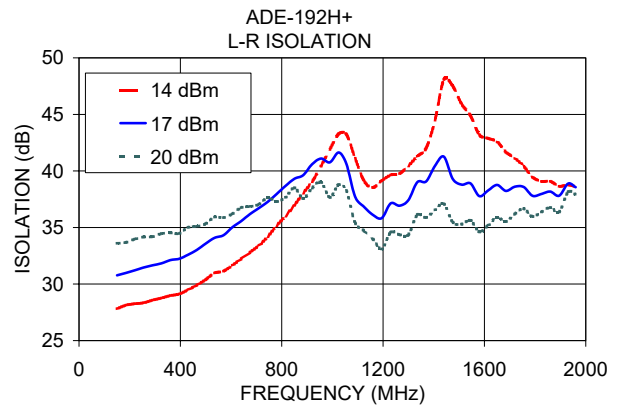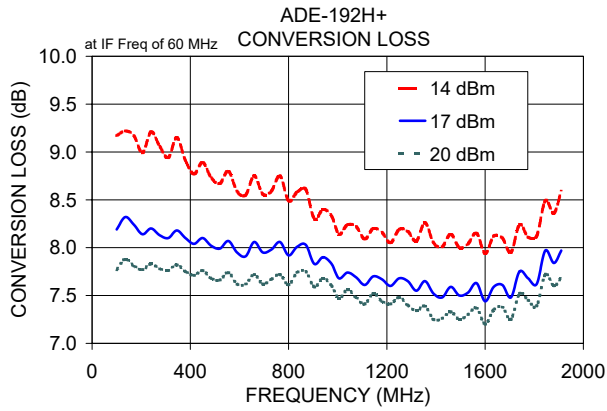

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

# Frequency Mixer

# ADE-192H+

## Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=50MHz (dB)			RF (IN) (MHz)	LO (MHz)	IP-3 INPUT (dBm)			RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+17dBm (dB)		
		@LO (dBm)					@LO (dBm)					@LO (dBm)		
		+14	+17	+20			+14	+17	+20			+14	+17	+20
10.1	60.1	9.49	8.49	8.11	10.1	60.1	19.00	21.81	25.10	10.1	60.1	2.46	1.29	0.50
70.1	120.1	9.42	8.38	7.87	70.1	120.1	18.93	21.82	25.98	70.1	120.1	2.71	1.26	0.57
130.1	180.1	9.23	8.24	7.72	130.1	180.1	18.86	23.22	25.81	130.1	180.1	2.79	1.35	0.64
190.1	240.1	9.43	8.36	7.78	190.1	240.1	18.69	24.80	23.36	190.1	240.1	2.59	1.25	0.63
250.1	300.1	9.34	8.23	7.74	250.1	300.1	20.51	22.67	24.08	250.1	300.1	2.44	1.31	0.64
310.1	360.1	9.31	8.20	7.73	310.1	360.1	21.63	23.00	27.22	310.1	360.1	2.20	1.27	0.65
370.1	420.1	9.10	8.05	7.64	370.1	420.1	20.49	21.80	26.60	370.1	420.1	2.61	1.45	0.74
430.1	480.1	9.06	8.07	7.66	430.1	480.1	19.81	22.79	29.50	430.1	480.1	2.75	1.47	0.73
490.1	540.1	9.16	8.19	7.60	490.1	540.1	19.75	25.41	31.65	490.1	540.1	2.71	1.41	0.85
550.1	600.1	8.95	8.00	7.58	550.1	600.1	19.31	24.15	30.56	550.1	600.1	3.08	1.57	0.78
610.1	660.1	8.91	8.07	7.64	610.1	660.1	19.70	23.55	30.51	610.1	660.1	2.77	1.40	0.77
670.1	720.1	8.92	8.10	7.69	670.1	720.1	20.83	26.52	37.40	670.1	720.1	2.54	1.28	0.71
730.1	780.1	8.67	7.89	7.51	730.1	780.1	20.76	25.96	34.64	730.1	780.1	2.78	1.43	0.81
790.1	840.1	8.73	7.93	7.54	790.1	840.1	21.06	25.49	34.67	790.1	840.1	2.78	1.44	0.79
850.1	900.1	8.70	7.94	7.56	850.1	900.1	21.75	28.56	28.13	850.1	900.1	3.03	1.44	0.74
910.1	960.1	8.63	7.89	7.50	910.1	960.1	21.96	28.01	27.89	910.1	960.1	3.24	1.50	0.79
970.1	1020.1	8.49	7.75	7.42	970.1	1020.1	22.22	27.25	27.22	970.1	1020.1	3.03	1.50	0.82
1030.1	1080.1	8.57	7.77	7.42	1030.1	1080.1	21.72	26.49	29.66	1030.1	1080.1	2.82	1.44	0.89
1090.1	1140.1	8.50	7.69	7.37	1090.1	1140.1	22.69	24.54	25.38	1090.1	1140.1	2.73	1.45	0.78
1150.1	1200.1	8.49	7.71	7.37	1150.1	1200.1	21.69	24.63	26.35	1150.1	1200.1	2.83	1.51	0.80
1210.1	1260.1	8.40	7.66	7.34	1210.1	1260.1	20.00	24.99	32.58	1210.1	1260.1	3.31	1.64	0.82
1270.1	1320.1	8.48	7.72	7.37	1270.1	1320.1	20.56	28.38	27.18	1270.1	1320.1	3.33	1.62	0.74
1330.1	1380.1	8.51	7.77	7.42	1330.1	1380.1	22.53	27.20	28.33	1330.1	1380.1	3.14	1.52	0.70
1390.1	1440.1	8.36	7.65	7.33	1390.1	1440.1	23.89	25.94	28.15	1390.1	1440.1	3.10	1.53	0.76
1450.1	1500.1	8.44	7.75	7.42	1450.1	1500.1	26.35	26.03	26.37	1450.1	1500.1	2.79	1.38	0.69
1510.1	1560.1	8.55	7.88	7.54	1510.1	1560.1	25.82	27.20	27.40	1510.1	1560.1	2.77	1.33	0.62
1570.1	1620.1	8.42	7.76	7.46	1570.1	1620.1	24.08	28.66	29.91	1570.1	1620.1	3.13	1.45	0.67
1630.1	1680.1	8.53	7.91	7.61	1630.1	1680.1	23.60	27.69	28.50	1630.1	1680.1	3.23	1.47	0.65
1690.1	1740.1	8.72	8.07	7.77	1690.1	1740.1	22.56	25.41	27.38	1690.1	1740.1	3.00	1.35	0.57
1750.1	1800.1	8.76	8.09	7.77	1750.1	1800.1	22.42	26.04	30.53	1750.1	1800.1	2.73	1.29	0.66
1810.1	1860.1	9.06	8.37	8.07	1810.1	1860.1	23.26	25.54	29.35	1810.1	1860.1	2.46	1.23	0.64
1870.1	1920.1	9.29	8.56	8.19	1870.1	1920.1	24.79	25.31	27.89	1870.1	1920.1	2.33	1.13	0.69
1930.1	1980.1	9.59	8.82	8.44	1930.1	1980.1	24.42	26.65	26.70	1930.1	1980.1	2.37	1.17	0.72
1990.1	2040.1	10.01	9.22	8.82	1990.1	2040.1	24.68	28.73	28.08	1990.1	2040.1	2.23	1.14	0.71
2050.1	2100.1	10.23	9.31	8.85	2050.1	2100.1	24.21	29.02	34.76	2050.1	2100.1	1.89	1.08	0.71
2110.1	2160.1	10.82	9.84	9.34	2110.1	2160.1	23.63	27.15	30.12	2110.1	2160.1	1.55	0.97	0.64
2170.1	2220.1	11.05	9.98	9.44	2170.1	2220.1	22.88	28.92	30.96	2170.1	2220.1	1.35	0.91	0.61
2230.1	2280.1	11.28	10.02	9.42	2230.1	2280.1	22.54	36.28	30.15	2230.1	2280.1	1.40	1.07	0.75
2290.1	2340.1	11.66	10.49	9.90	2290.1	2340.1	24.81	30.37	31.46	2290.1	2340.1	1.32	1.01	0.71
2350.1	2400.1	11.82	10.59	9.96	2350.1	2400.1	21.81	25.28	24.57	2350.1	2400.1	1.08	0.87	0.65

# Frequency Mixer

# ADE-192H+

## Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1005.1MHz (dB)
		@LO (dBm)
		+17
990.0	15.1	7.89
940.0	65.1	7.96
890.0	115.1	7.97
840.0	165.1	8.02
790.0	215.1	7.95
740.0	265.1	7.91
690.0	315.1	7.83
640.0	365.1	7.82
590.0	415.1	7.78
540.0	465.1	7.76
490.0	515.1	7.68
440.0	565.1	7.75
390.0	615.1	7.68
340.0	665.1	7.68
290.0	715.1	7.60
240.0	765.1	7.60
190.0	815.1	7.69
140.0	865.1	7.74
90.0	915.1	7.69
40.0	965.1	7.80
15.0	1020.1	7.95
85.0	1090.1	7.59
155.0	1160.1	7.49
225.0	1230.1	7.36
295.0	1300.1	7.32
365.0	1370.1	7.31
435.0	1440.1	7.31
505.0	1510.1	7.31
575.0	1580.1	7.21
645.0	1650.1	7.12
715.0	1720.1	7.05
785.0	1790.1	6.92
855.0	1860.1	6.88
935.0	1940.1	6.86
1005.0	2010.1	6.90
1075.0	2080.1	7.18
1145.0	2150.1	7.29
1215.0	2220.1	7.39
1285.0	2290.1	7.87
1355.0	2360.1	8.22

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=100.1MHz (dB)
		@LO (dBm)
		+17
10.0	110.1	8.60
60.0	160.1	8.34
120.0	220.1	8.23
180.0	280.1	8.09
240.0	340.1	8.17
300.0	400.1	7.93
360.0	460.1	7.89
420.0	520.1	7.84
470.0	570.1	7.89
530.0	630.1	7.82
590.0	690.1	7.89
650.0	750.1	7.79
710.0	810.1	7.82
770.0	870.1	7.75
830.0	930.1	7.77
890.0	990.1	7.79
940.0	1040.1	7.73
1000.0	1100.1	7.67
1060.0	1160.1	7.70
1120.0	1220.1	7.79
1180.0	1280.1	7.76
1240.0	1340.1	7.82
1300.0	1400.1	7.82
1360.0	1460.1	7.76
1410.0	1510.1	7.80
1470.0	1570.1	7.79
1530.0	1630.1	7.78
1590.0	1690.1	7.97
1650.0	1750.1	8.14
1710.0	1810.1	8.30
1770.0	1870.1	8.67
1830.0	1930.1	8.97
1880.0	1980.1	9.26
1940.0	2040.1	9.73
2000.0	2100.1	10.10
2060.0	2160.1	10.52
2120.0	2220.1	10.73
2180.0	2280.1	10.91
2240.0	2340.1	10.93
2300.0	2400.1	11.05

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1910.1MHz (dB)
		@LO (dBm)
		+17
1900.0	10.1	8.84
1860.0	50.1	8.89
1810.0	100.1	8.83
1760.0	150.1	8.80
1710.0	200.1	8.70
1660.0	250.1	8.58
1610.0	300.1	8.47
1570.0	340.1	8.51
1520.0	390.1	8.38
1470.0	440.1	8.28
1420.0	490.1	8.23
1370.0	540.1	8.24
1320.0	590.1	8.28
1280.0	630.1	8.22
1230.0	680.1	8.16
1180.0	730.1	8.18
1130.0	780.1	8.11
1080.0	830.1	8.06
1030.0	880.1	8.01
980.0	930.1	8.00
940.0	970.1	8.05
890.0	1020.1	8.21
840.0	1070.1	8.17
790.0	1120.1	8.25
740.0	1170.1	8.32
690.0	1220.1	8.39
650.0	1260.1	8.24
600.0	1310.1	8.25
550.0	1360.1	8.20
500.0	1410.1	8.18
450.0	1460.1	8.16
400.0	1510.1	8.13
350.0	1560.1	8.15
310.0	1600.1	8.29
260.0	1650.1	8.29
210.0	1700.1	8.31
160.0	1750.1	8.37
110.0	1800.1	8.50
60.0	1850.1	8.67
10.0	1900.1	8.80

# Frequency Mixer

# ADE-192H+

## Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+14	+17	+20	+14	+17	+20
60.1	30.96	33.49	36.07	25.06	27.92	30.88
120.1	32.50	35.11	37.76	25.36	28.13	30.99
180.1	32.52	35.17	37.83	25.43	28.36	31.32
240.1	32.97	35.58	38.20	25.42	28.38	31.11
300.1	33.56	36.35	39.07	25.93	29.01	31.67
360.1	33.37	36.25	38.91	26.07	29.14	31.66
420.1	33.70	36.42	39.15	26.50	29.39	31.81
480.1	34.61	37.51	40.25	26.81	29.66	32.07
540.1	34.89	37.73	40.37	27.42	30.23	32.37
600.1	35.20	38.30	41.03	27.65	30.62	32.59
660.1	35.88	38.89	41.57	27.88	30.66	32.50
720.1	36.58	39.63	42.28	28.64	31.33	32.83
780.1	37.41	40.58	43.30	28.87	31.52	32.88
840.1	38.29	41.43	43.92	29.59	32.14	33.15
900.1	39.06	42.41	44.90	30.23	32.68	33.44
960.1	40.49	43.96	46.38	30.93	33.15	33.60
1020.1	41.60	44.74	46.69	32.07	34.16	34.54
1080.1	43.04	45.71	46.98	33.97	35.68	35.80
1140.1	42.58	44.99	45.71	37.34	37.51	36.96
1200.1	41.16	44.13	45.73	36.88	36.44	35.92
1260.1	41.27	44.34	46.22	36.29	36.30	36.00
1320.1	42.11	45.50	47.53	37.31	37.43	36.92
1380.1	42.94	46.34	47.57	38.22	37.93	37.28
1440.1	43.44	46.12	46.11	38.93	38.60	37.79
1500.1	44.78	46.45	45.41	41.09	40.11	38.60
1560.1	46.39	47.62	46.06	42.84	41.62	39.67
1620.1	47.47	47.92	46.07	45.45	43.77	41.22
1680.1	49.77	49.16	46.75	49.27	47.31	44.19
1740.1	51.92	49.42	46.32	60.24	52.58	46.68
1800.1	52.84	48.52	45.14	52.28	53.08	47.40
1860.1	53.18	48.39	45.13	46.11	48.16	47.69
1920.1	51.32	46.85	43.77	42.35	43.19	43.54
1980.1	49.69	46.15	43.21	40.71	41.36	41.42
2040.1	47.81	45.49	42.96	39.03	39.74	39.82
2100.1	47.15	44.90	42.36	37.43	37.93	38.09
2160.1	46.14	44.87	42.97	36.29	36.89	37.41
2220.1	45.14	44.07	42.36	35.95	36.53	36.96
2280.1	45.46	44.73	43.07	36.22	36.97	37.54
2340.1	45.12	44.42	42.94	36.40	37.53	38.57
2400.1	45.26	43.97	42.27	37.01	38.25	39.78

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+14	+17	+20
10.1	60.1	28.23	32.37	36.98
70.1	120.1	31.19	34.92	38.04
130.1	180.1	33.60	37.37	39.90
190.1	240.1	33.54	36.70	38.20
250.1	300.1	34.27	35.96	36.18
310.1	360.1	34.37	35.00	34.87
370.1	420.1	34.34	34.06	33.56
430.1	480.1	33.69	33.02	32.43
490.1	540.1	33.19	32.34	31.76
550.1	600.1	33.05	31.99	31.01
610.1	660.1	32.50	31.63	31.04
670.1	720.1	31.67	30.78	30.08
730.1	780.1	31.18	30.38	30.00
790.1	840.1	31.13	30.37	29.96
850.1	900.1	31.17	30.41	29.85
910.1	960.1	31.44	29.97	29.02
970.1	1020.1	31.43	29.89	29.02
1030.1	1080.1	31.54	30.18	29.80
1090.1	1140.1	32.01	31.29	31.14
1150.1	1200.1	34.69	34.13	33.66
1210.1	1260.1	38.59	37.16	35.51
1270.1	1320.1	45.39	40.46	37.38
1330.1	1380.1	42.01	39.54	37.35
1390.1	1440.1	39.11	36.99	35.76
1450.1	1500.1	39.36	36.49	35.21
1510.1	1560.1	42.42	38.86	36.49
1570.1	1620.1	55.64	46.45	41.69
1630.1	1680.1	49.94	56.06	53.00
1690.1	1740.1	42.29	42.41	43.64
1750.1	1800.1	35.87	35.10	34.94
1810.1	1860.1	32.48	31.97	31.81
1870.1	1920.1	30.10	29.75	29.50
1930.1	1980.1	28.20	27.70	27.38
1990.1	2040.1	27.34	26.86	26.66
2050.1	2100.1	27.00	26.69	26.80
2110.1	2160.1	27.25	27.28	27.54
2170.1	2220.1	27.01	27.24	27.59
2230.1	2280.1	26.07	26.58	27.25
2290.1	2340.1	25.92	26.72	27.60
2350.1	2400.1	25.33	26.44	27.54

# Frequency Mixer

# ADE-192H+

## Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=1910MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+14	+17	+20		+14	+17	+20		+14	+17	+20
10.1	60.1	1.19	1.29	1.41	60.1	1.79	1.14	1.36	10.1	1.72	1.87	1.90
70.1	120.1	1.22	1.04	1.10	120.1	1.74	1.12	1.39	50.1	1.11	1.16	1.24
130.1	180.1	1.19	1.02	1.09	180.1	1.73	1.16	1.35	100.1	1.12	1.20	1.28
190.1	240.1	1.25	1.06	1.08	240.1	1.77	1.14	1.38	150.1	1.14	1.19	1.26
250.1	300.1	1.26	1.08	1.07	300.1	1.75	1.16	1.39	200.1	1.15	1.15	1.21
310.1	360.1	1.27	1.12	1.09	360.1	1.74	1.14	1.38	250.1	1.13	1.14	1.21
370.1	420.1	1.29	1.15	1.12	420.1	1.79	1.16	1.42	300.1	1.19	1.16	1.20
430.1	480.1	1.34	1.21	1.17	480.1	1.70	1.13	1.42	340.1	1.17	1.14	1.19
490.1	540.1	1.37	1.25	1.20	540.1	1.72	1.16	1.45	390.1	1.20	1.16	1.20
550.1	600.1	1.44	1.31	1.25	600.1	1.68	1.12	1.47	440.1	1.20	1.13	1.16
610.1	660.1	1.48	1.37	1.31	660.1	1.63	1.14	1.49	490.1	1.19	1.11	1.15
670.1	720.1	1.52	1.41	1.35	720.1	1.61	1.13	1.51	540.1	1.18	1.09	1.14
730.1	780.1	1.56	1.43	1.37	780.1	1.59	1.15	1.54	590.1	1.19	1.08	1.11
790.1	840.1	1.62	1.48	1.41	840.1	1.55	1.15	1.56	630.1	1.20	1.09	1.11
850.1	900.1	1.65	1.50	1.43	900.1	1.52	1.14	1.58	680.1	1.21	1.08	1.09
910.1	960.1	1.71	1.54	1.44	960.1	1.46	1.16	1.61	730.1	1.23	1.09	1.08
970.1	1020.1	1.75	1.56	1.45	1020.1	1.44	1.16	1.62	780.1	1.22	1.07	1.07
1030.1	1080.1	1.81	1.58	1.45	1080.1	1.40	1.17	1.65	830.1	1.24	1.09	1.09
1090.1	1140.1	1.81	1.55	1.39	1140.1	1.39	1.16	1.66	880.1	1.25	1.09	1.06
1150.1	1200.1	1.84	1.60	1.43	1200.1	1.36	1.17	1.65	930.1	1.26	1.11	1.08
1210.1	1260.1	1.88	1.65	1.49	1260.1	1.34	1.19	1.69	970.1	1.28	1.11	1.05
1270.1	1320.1	1.94	1.72	1.56	1320.1	1.31	1.20	1.71	1020.1	1.31	1.13	1.06
1330.1	1380.1	2.01	1.78	1.62	1380.1	1.29	1.21	1.72	1070.1	1.32	1.15	1.08
1390.1	1440.1	2.08	1.82	1.64	1440.1	1.29	1.22	1.75	1120.1	1.38	1.20	1.12
1450.1	1500.1	2.14	1.87	1.68	1500.1	1.29	1.24	1.76	1170.1	1.39	1.21	1.13
1510.1	1560.1	2.17	1.91	1.72	1560.1	1.29	1.27	1.78	1220.1	1.44	1.26	1.18
1570.1	1620.1	2.15	1.90	1.72	1620.1	1.32	1.29	1.81	1260.1	1.45	1.27	1.19
1630.1	1680.1	2.13	1.90	1.75	1680.1	1.36	1.30	1.80	1310.1	1.48	1.30	1.21
1690.1	1740.1	2.12	1.90	1.76	1740.1	1.40	1.34	1.82	1360.1	1.54	1.36	1.27
1750.1	1800.1	2.16	1.93	1.80	1800.1	1.48	1.38	1.86	1410.1	1.61	1.42	1.33
1810.1	1860.1	2.18	1.97	1.87	1860.1	1.54	1.42	1.85	1460.1	1.61	1.43	1.35
1870.1	1920.1	2.28	2.06	1.96	1920.1	1.58	1.47	1.90	1510.1	1.71	1.52	1.43
1930.1	1980.1	2.37	2.17	2.06	1980.1	1.66	1.50	1.89	1560.1	1.73	1.55	1.46
1990.1	2040.1	2.47	2.28	2.18	2040.1	1.67	1.54	1.91	1600.1	1.75	1.57	1.48
2050.1	2100.1	2.56	2.38	2.28	2100.1	1.74	1.56	1.95	1650.1	1.83	1.65	1.56
2110.1	2160.1	2.65	2.49	2.40	2160.1	1.80	1.59	1.90	1700.1	1.84	1.67	1.58
2170.1	2220.1	2.72	2.56	2.47	2220.1	1.78	1.59	1.92	1750.1	1.88	1.71	1.62
2230.1	2280.1	2.76	2.60	2.51	2280.1	1.91	1.62	1.91	1800.1	1.95	1.78	1.69
2290.1	2340.1	2.82	2.67	2.60	2340.1	1.87	1.62	1.88	1850.1	1.94	1.77	1.68
2350.1	2400.1	2.90	2.76	2.68	2400.1	1.94	1.62	1.88	1900.1	1.98	1.82	1.72

## Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	---	---	8.5	24.4	24.4	26.3	30.0	33.7	42.8	46.2	45.6	49.1
1	---	22.9	---	38.5	20.1	38.4	20.5	34.9	32.8	44.7	36.2	52.9
2	113.2	52.0	54.3	60.4	53.8	48.6	55.5	57.7	49.7	55.9	53.4	61.6
3	110.7	61.9	51.3	63.6	60.4	63.2	53.5	65.5	49.8	62.9	56.1	72.7
4	112.4	77.4	76.9	71.0	66.4	80.6	64.9	80.9	72.0	74.4	68.8	82.0
5	111.8	76.9	81.5	76.9	73.1	74.3	80.3	75.8	69.1	87.8	76.1	87.5
6	122.3	91.7	101.6	88.1	82.0	90.1	80.2	98.4	79.6	90.9	87.0	90.1
7	111.6	102.8	95.2	85.9	97.7	92.1	87.8	92.7	85.2	90.6	89.2	93.4
8	116.1	99.3	105.9	92.1	101.1	103.7	92.0	94.4	103.9	102.6	97.2	114.8
9	111.5	92.6	87.9	100.3	93.3	103.2	127.0	104.7	102.0	100.2	93.8	102.1
10	108.1	95.4	92.9	96.2	91.4	100.3	88.9	109.3	89.6	102.2	97.3	110.7
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

### LO HARMONICS ORDER

Test conditions: RF IN: 1005.1 MHz; 0 dBm.  
 LO IN: 1055.1 MHz; +17 dBm  
 IF OUT: 50 MHz; -8.23 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	---	---	18.5	33.0	35.0	36.1	41.9	67.5	50.2	56.6	54.9	51.2
1	---	22.7	---	37.7	19.9	42.4	25.2	40.5	40.4	58.6	56.2	60.9
2	88.1	40.8	43.7	49.0	40.6	46.4	55.8	61.0	50.2	53.3	58.4	62.1
3	100.9	53.1	37.3	58.6	35.4	64.4	46.1	53.9	36.7	51.1	46.8	62.2
4	108.4	63.9	59.8	60.4	55.8	57.9	62.5	60.0	60.5	72.0	56.9	65.5
5	108.7	62.7	68.5	65.6	65.7	65.0	56.7	67.0	62.4	69.9	55.4	71.4
6	118.7	69.4	70.7	72.7	63.9	60.9	61.6	64.1	61.1	74.9	70.6	66.6
7	119.7	86.2	89.1	74.1	72.5	74.3	74.3	68.4	78.0	68.8	61.3	77.5
8	116.7	91.9	85.3	75.7	78.2	74.9	73.7	68.7	71.9	76.9	68.3	82.9
9	118.4	90.9	93.2	91.4	87.7	83.5	79.3	79.5	69.6	76.5	69.5	75.0
10	107.6	92.4	91.7	97.3	90.0	84.6	82.2	80.3	82.2	78.0	81.2	89.1
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

### LO HARMONICS ORDER

Test conditions: RF IN: 1005.1 MHz; 10 dBm.  
 LO IN: 1055.1 MHz; +17 dBm  
 IF OUT: 50 MHz; 1.64 dBm








- Notes:
1. All Harmonics are in (dBc) relative to IF OUTPUT
  2. + entry denotes harmonics are in (dBc) above IF OUTPUT
  3. RF Cal represents the Harmonics level of the RF Input Signal to the mixer









# Frequency Mixer

## Typical Performance Curves

**ADE-192H+**

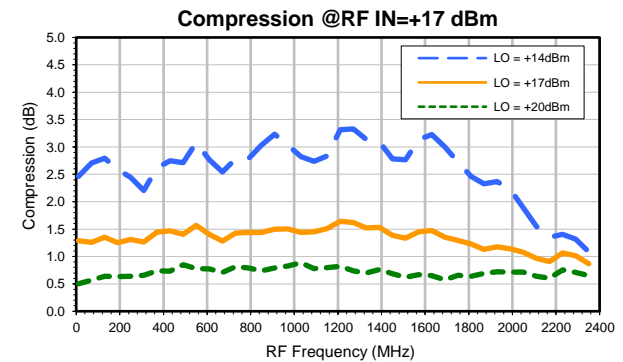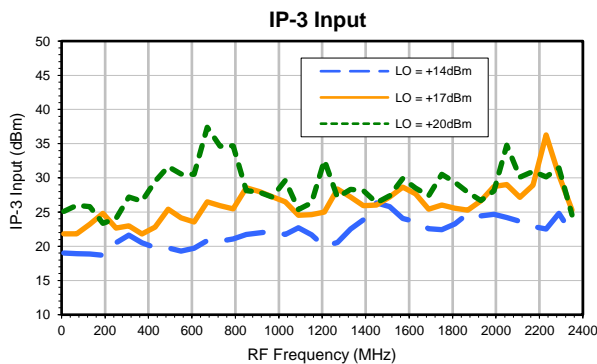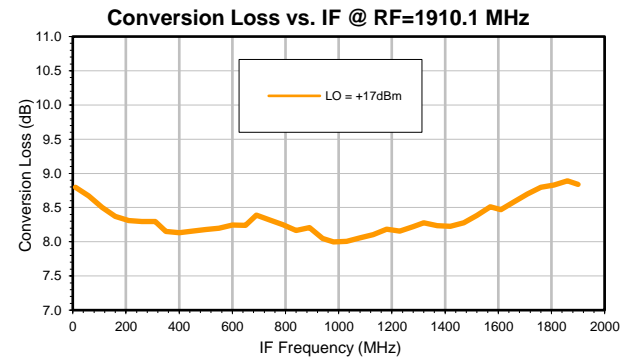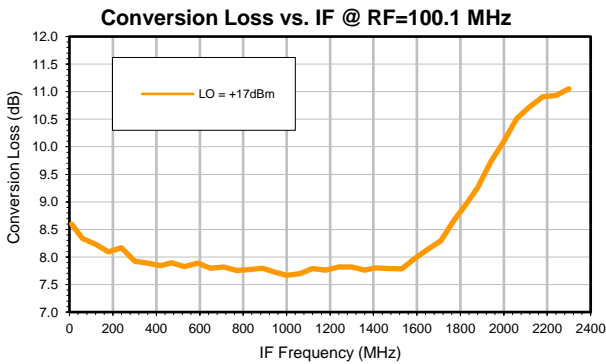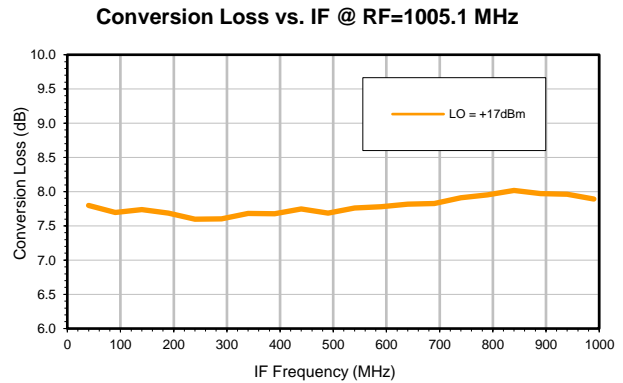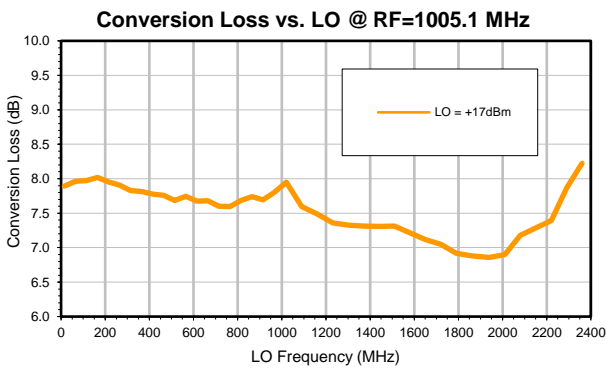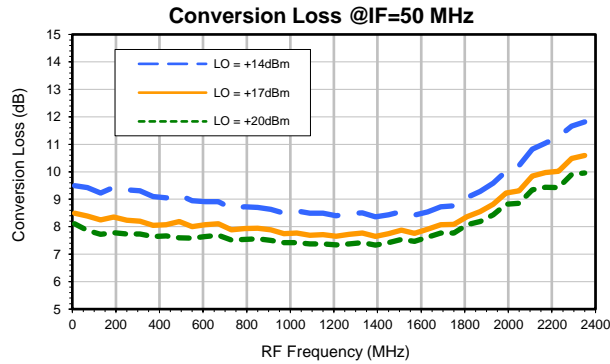

## Typical Performance Curves

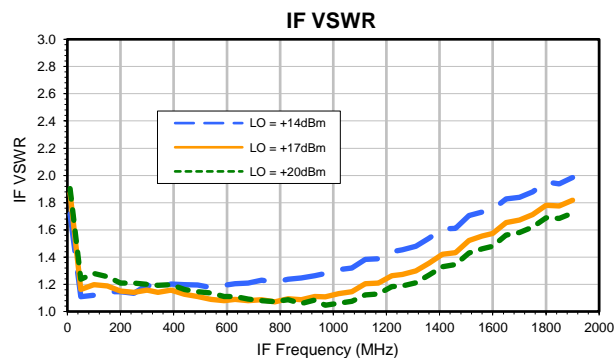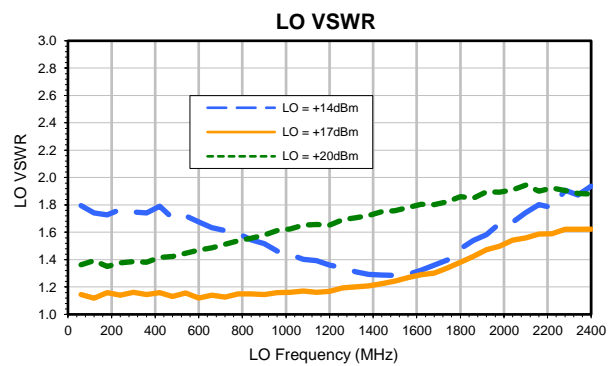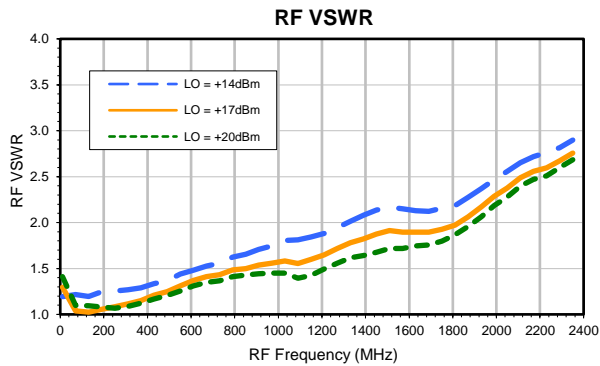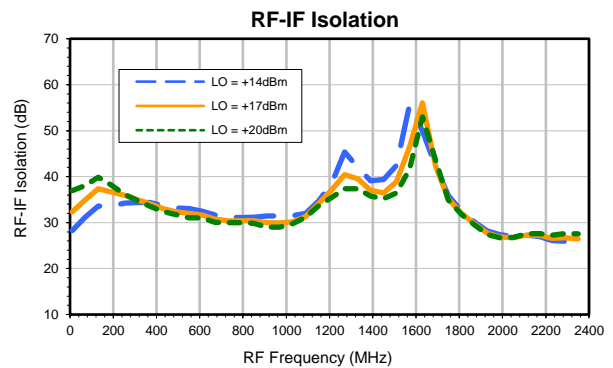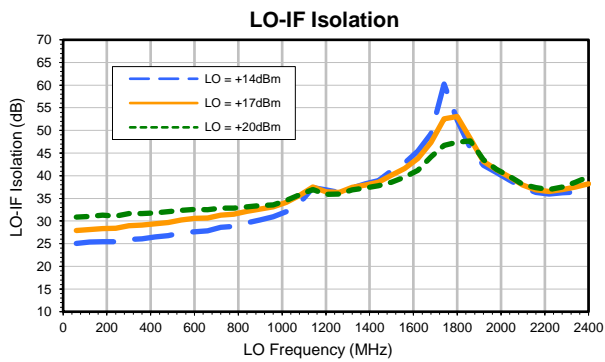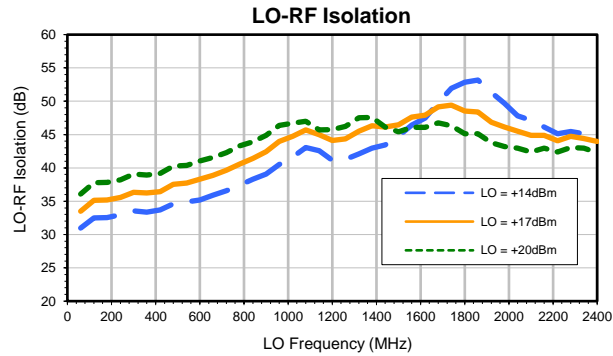

## Harmonics Tables

RF HARMONICS ORDER	(-dBm)		(-dBc)									
	RF CAL	0	1	2	3	4	5	6	7	8	9	10
0	---	---	8.5	24.4	24.4	26.3	30.0	33.7	42.8	46.2	45.6	49.1
1	---	22.9	---	38.5	20.1	38.4	20.5	34.9	32.8	44.7	36.2	52.9
2	113.2	52.0	54.3	60.4	53.8	48.6	55.5	57.7	49.7	55.9	53.4	61.6
3	110.7	61.9	51.3	63.6	60.4	63.2	53.5	65.5	49.8	62.9	56.1	72.7
4	112.4	77.4	76.9	71.0	66.4	80.6	64.9	80.9	72.0	74.4	68.8	82.0
5	111.8	76.9	81.5	76.9	73.1	74.3	80.3	75.8	69.1	87.8	76.1	87.5
6	122.3	91.7	101.6	88.1	82.0	90.1	80.2	98.4	79.6	90.9	87.0	90.1
7	111.6	102.8	95.2	85.9	97.7	92.1	87.8	92.7	85.2	90.6	89.2	93.4
8	116.1	99.3	105.9	92.1	101.1	103.7	92.0	94.4	103.9	102.6	97.2	114.8
9	111.5	92.6	87.9	100.3	93.3	103.2	127.0	104.7	102.0	100.2	93.8	102.1
10	108.1	95.4	92.9	96.2	91.4	100.3	88.9	109.3	89.6	102.2	97.3	110.7

### LO HARMONICS ORDER

Test conditions: RF IN: 1005.1 MHz; 0 dBm.  
 LO IN: 1055.1 MHz; +17 dBm  
 IF OUT: 50 MHz; -8.23 dBm

RF HARMONICS ORDER	(-dBm)		(-dBc)									
	RF CAL	0	1	2	3	4	5	6	7	8	9	10
0	---	---	18.5	33.0	35.0	36.1	41.9	67.5	50.2	56.6	54.9	51.2
1	---	22.7	---	37.7	19.9	42.4	25.2	40.5	40.4	58.6	56.2	60.9
2	88.1	40.8	43.7	49.0	40.6	46.4	55.8	61.0	50.2	53.3	58.4	62.1
3	100.9	53.1	37.3	58.6	35.4	64.4	46.1	53.9	36.7	51.1	46.8	62.2
4	108.4	63.9	59.8	60.4	55.8	57.9	62.5	60.0	60.5	72.0	56.9	65.5
5	108.7	62.7	68.5	65.6	65.7	65.0	56.7	67.0	62.4	69.9	55.4	71.4
6	118.7	69.4	70.7	72.7	63.9	60.9	61.6	64.1	61.1	74.9	70.6	66.6
7	119.7	86.2	89.1	74.1	72.5	74.3	74.3	68.4	78.0	68.8	61.3	77.5
8	116.7	91.9	85.3	75.7	78.2	74.9	73.7	68.7	71.9	76.9	68.3	82.9
9	118.4	90.9	93.2	91.4	87.7	83.5	79.3	79.5	69.6	76.5	69.5	75.0
10	107.6	92.4	91.7	97.3	90.0	84.6	82.2	80.3	82.2	78.0	81.2	89.1

### LO HARMONICS ORDER

Test conditions: RF IN: 1005.1 MHz; 10 dBm.  
 LO IN: 1055.1 MHz; +17 dBm  
 IF OUT: 50 MHz; 1.64 dBm

- Notes:
1. All Harmonics are in (dBc) relative to IF OUTPUT
  2. + entry denotes harmonics are in (dBc) above IF OUTPUT
  3. RF Cal represents the Harmonics level of the RF Input Signal to the mixer

# Case Style

# CD

CD541  
CD542  
CD636  
CD637

## Outline Dimensions



## PCB Land Pattern



Suggested Layout,  
Tolerance to be within  $\pm .002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	WT, GRAM
CD541					.082 (2.08)							.15
CD542	.272 (6.91)	.310 (7.87)	.220 (5.58)	.100 (2.54)	.112 (2.84)	.055 (1.40)	.100 (2.54)	.030 (0.76)	.026 (0.66)	.065 (1.65)	.300 (7.62)	.20
CD636					.162 (4.11)							.25
CD637					.206 (5.23)							.40

Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm .01$ ; 3 Pl.  $\pm .005$

### Notes:

- Case material: Plastic.
- Termination finish:
  - For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
  - For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

**Mini-Circuits®**

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

# Tape & Reel Packaging TR-F34



Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
16	12	7	Small quantity standard (see note)	20
				50
				100
				200
		13	Standard	500
				1000

Note: Availability of small reel quantity varies by model.  
Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: [www.minicircuits.com/pages/pdfs/tape.pdf](http://www.minicircuits.com/pages/pdfs/tape.pdf)




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION

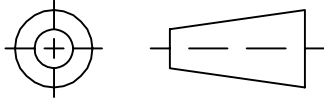

REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
A	M101143	ADDED "gk" PIN CONNECTION, TT100 CASE STYLE & NOTE 2	10/10/05	MMG	DJ
B	M102713	ADDED "...WITH SMOBC"	01/17/06	MMG	IL
C	M108637	REMOVED "PIN 1", ADDED INDEX ON UNIT	12/01/06	MYG	FL


SUGGESTED MOUNTING CONFIGURATION  
FOR BH292, CD541/542/636/637, TT100/240 CASE  
STYLES, "gk", "ht", "hu", "nd", "w" PIN CONNECTIONS

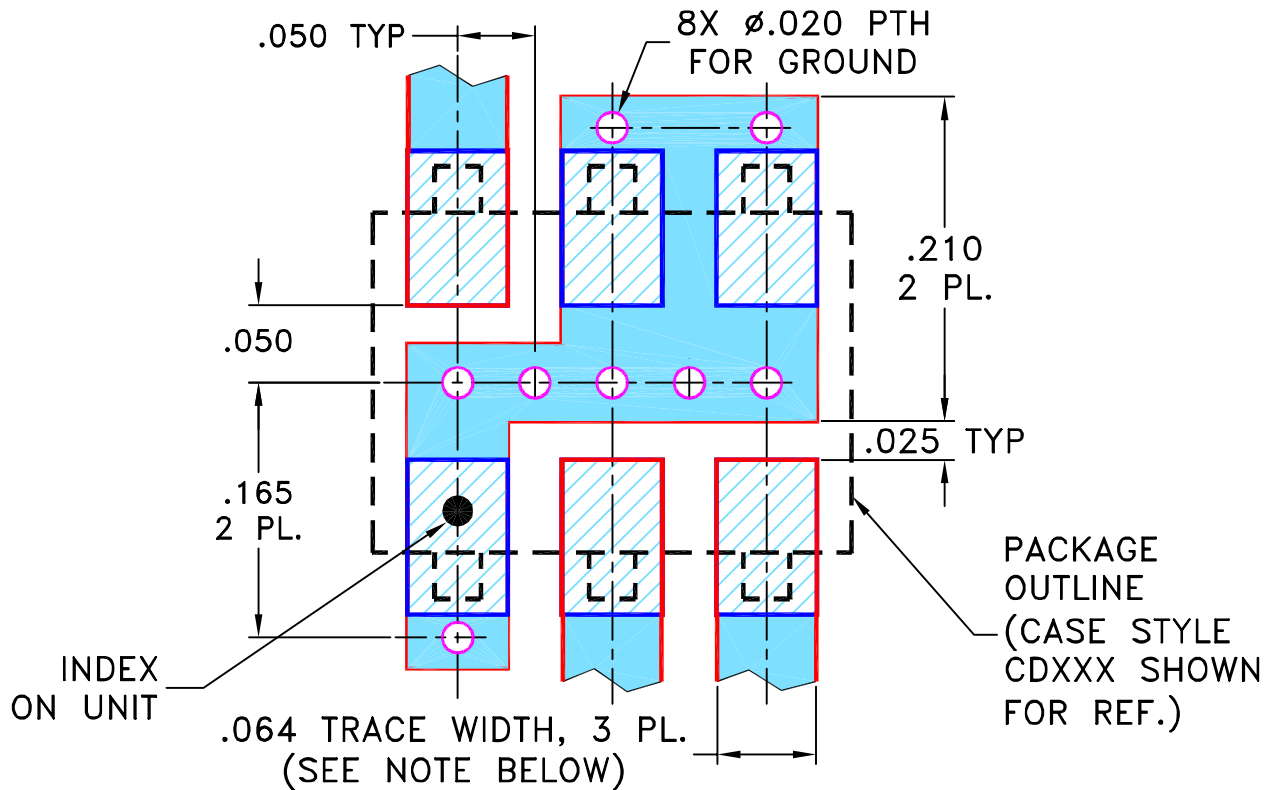

- NOTES:** 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ON:  
 2 PL DECIMALS ±  
 3 PL DECIMALS ± .005  
 ANGLES ±  
 FRACTIONS ±

	INITIALS	DATE
DRAWN	MMG	07/17/02
CHECKED	WL	08/02/02
APPROVED	DJ	08/05/02



**Mini-Circuits®**

13 Neptune Avenue  
 Brooklyn NY 11235


PL, gk/ht/hu/nd/w, BH292,  
 CD541/542/636/637, TT100/240, TB-03

Mini-Circuits®  
 THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.  
 ASHEETA1.DWG REV:A DATE:01/12/95


SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-052	C
FILE:	98PL052	SCALE: 8:1	SHEET: 1 OF 1

# Evaluation Board and Circuit

For Pin Connections and DUT Orientation Refer to  
Data Sheet of the DUT

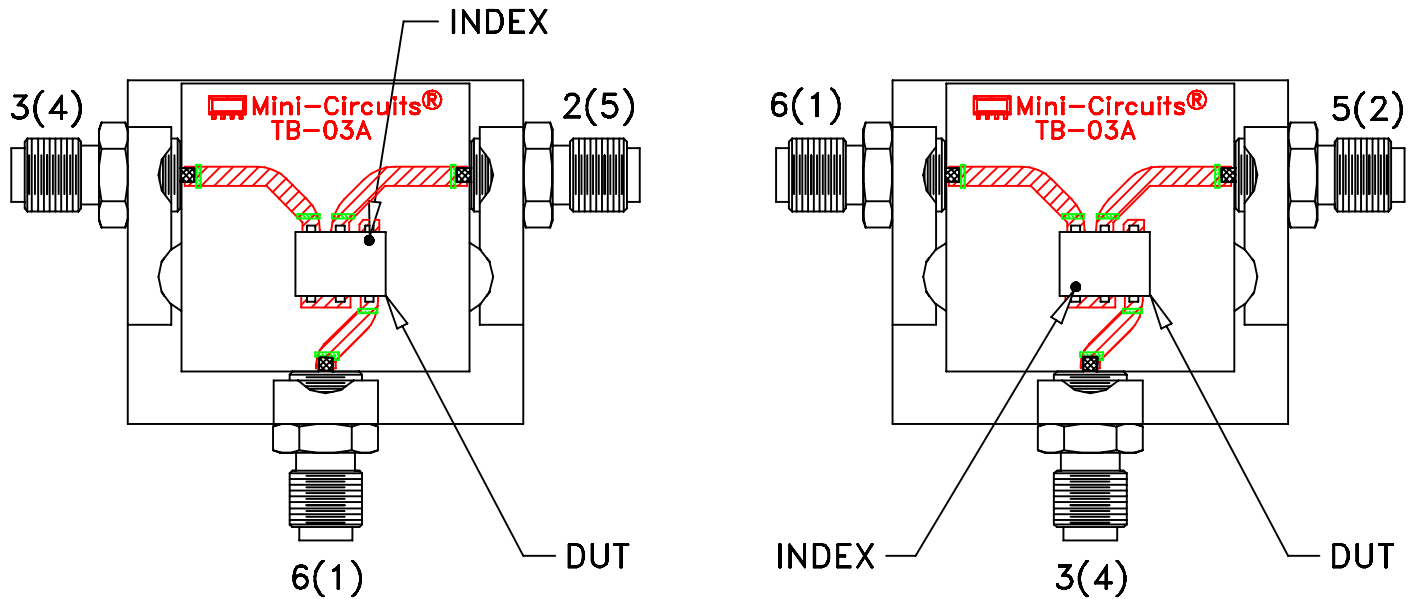


TB-03

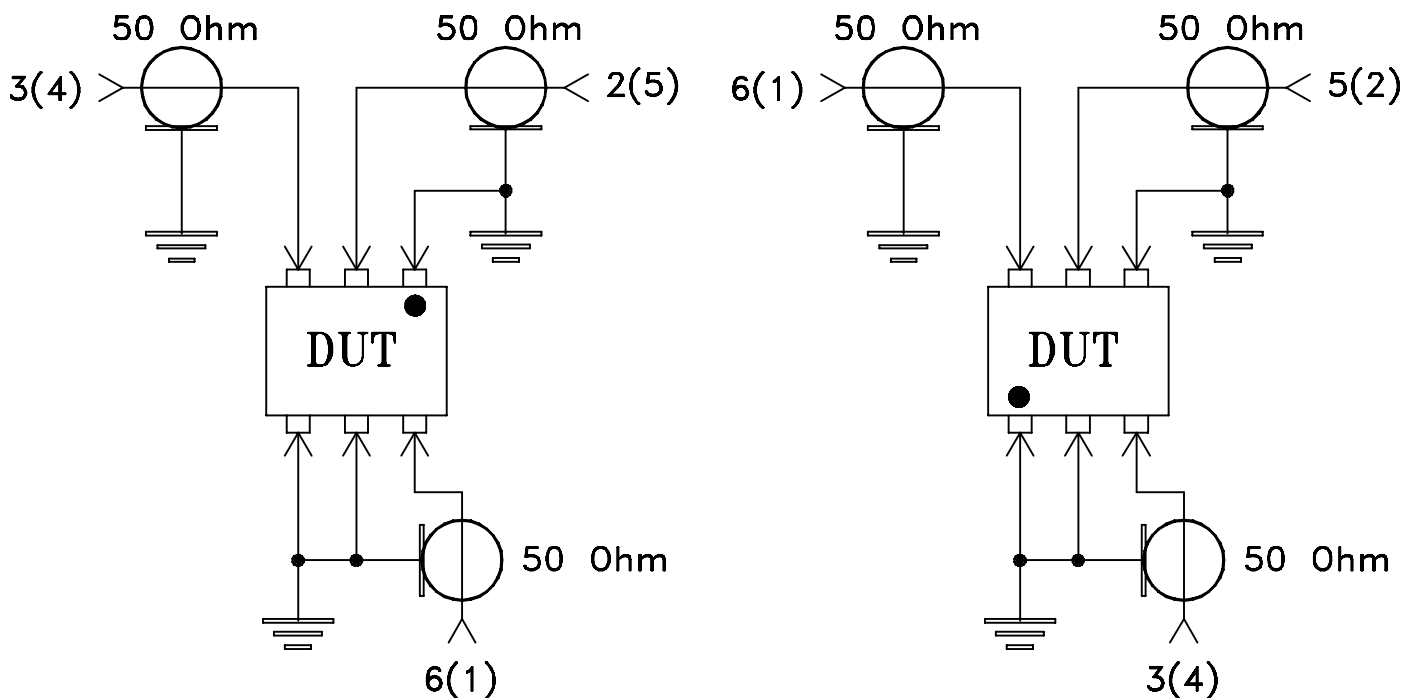

Schematic Diagram

## Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,  
Dielectric Constant=3.5, Thickness=.030 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215