



## GaAs pHEMT MMIC 2 WATT POWER AMPLIFIER, 5.5 - 8.5 GHz

### Typical Applications


The HMC7357LP5GE is ideal for:

- Point-to-Point Radios
- Point-to-Multi-Point Radios
- VSAT & SATCOM

### Features

- +35 dBm Pout @ 34% PAE
- High P1dB Output Power: +34 dBm
- High Output IP3: +41.5 dBm
- High Gain: 29 dB
- 50 Ohm Matched Input/Output
- Supply Voltage: Vdd = +8V @ 1200 mA
- 24-Lead 5x5 mm SMT Package

### Functional Diagram

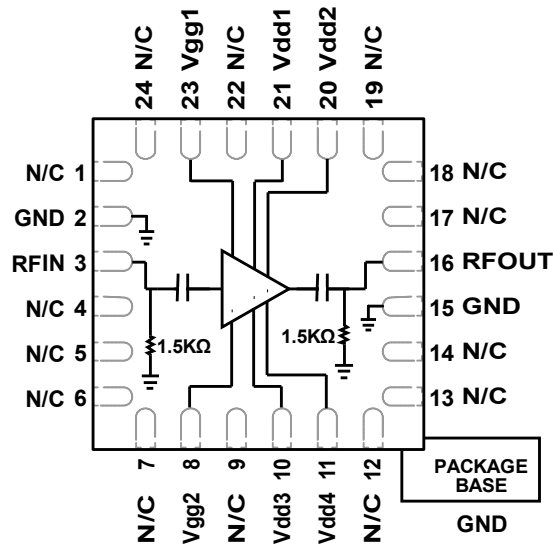

### General Description

The HMC7357LP5GE is a three-stage GaAs pHEMT MMIC Medium Power Amplifier that operates between 5.5 and 8.5 GHz. The amplifier provides 29 dB of gain and +35 dBm of saturated output power at 34% PAE from a +8V supply. With an excellent Output IP3 of +41.5 dBm, the HMC7357LP5GE is ideal for linear applications such as high capacity point-to-point and point-to-multi-point radios or VSAT/SATCOM applications demanding +35 dBm of efficient saturated output power. The RF I/Os are internally matched to 50 Ohms for ease of use. The HMC7357LP5GE is packaged in a leadless 5x5 mm plastic surface mount package and is compatible with surface mount manufacturing techniques.

### Electrical Specifications, $T_A = +25^\circ\text{C}$

$V_{dd} = V_{dd1} = V_{dd2} = V_{dd3} = V_{dd4} = 8\text{V}$ ,  $I_{dd} = 1200\text{ mA}$  [1]

Parameter	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range	5.5 - 7		7 - 8.5				GHz
Gain	26.5	29.5		28	31		dB
Gain Variation Over Temperature	0.0214		0.0234				dB/°C
Input Return Loss	14		14				dB
Output Return Loss	22		15				dB
Output Power for 1 dB Compression (P1dB)	31.5	34.5		31.5	34.5		dBm
Saturated Output Power (Psat)	35		35				dBm
Output Third Order Intercept (IP3) <sup>[2]</sup>	41.5		41.5				dBm
Total Supply Current (Idd)	1200		1200				mA


[1] Adjust Vgg between -2 to -0.4V to achieve Idd = 1200 mA typical.

[2] Measurement taken at +8V @ 1200 mA, Pout / Tone = +20 dBm




**GaAs pHEMT MMIC 2 WATT  
POWER AMPLIFIER, 5.5 - 8.5 GHz**


**Gain & Return Loss**

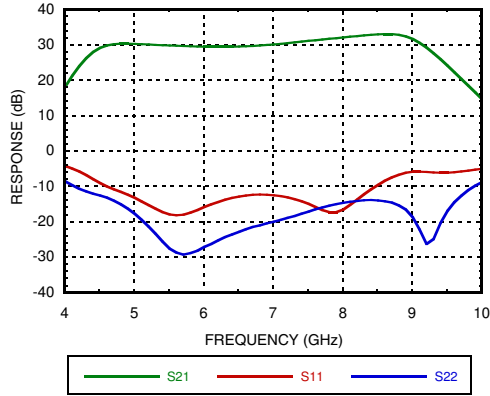


**Gain vs. Temperature**

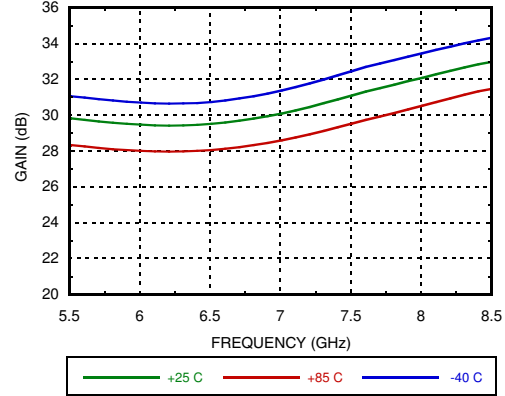


**Input Return Loss vs. Temperature**

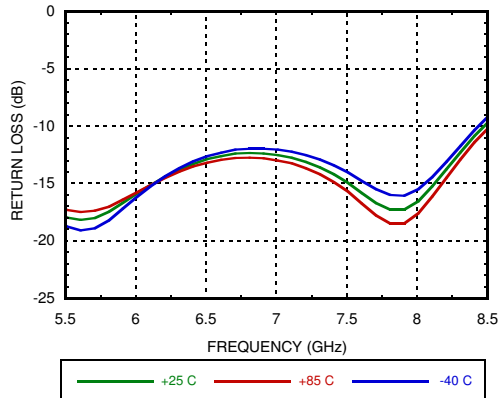


**Output Return Loss vs. Temperature**

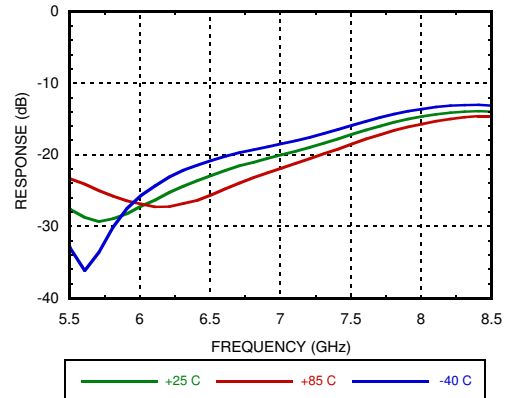

**P1dB vs. Temperature**

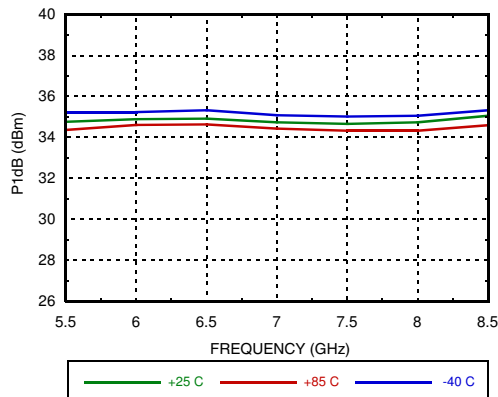


**P1dB vs. Supply Voltage**

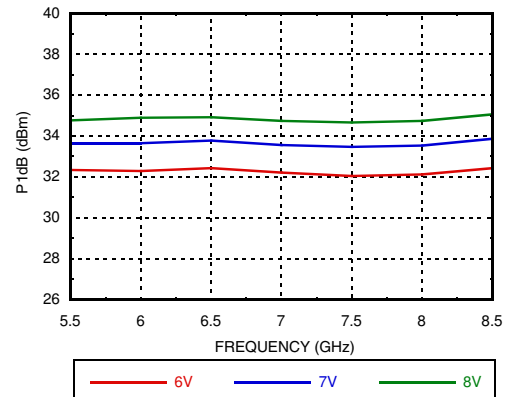




**GaAs pHEMT MMIC 2 WATT  
POWER AMPLIFIER, 5.5 - 8.5 GHz**


**Psat vs. Temperature**

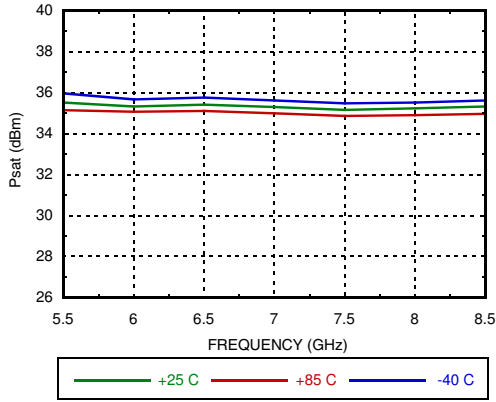


**Psat vs. Supply Voltage**

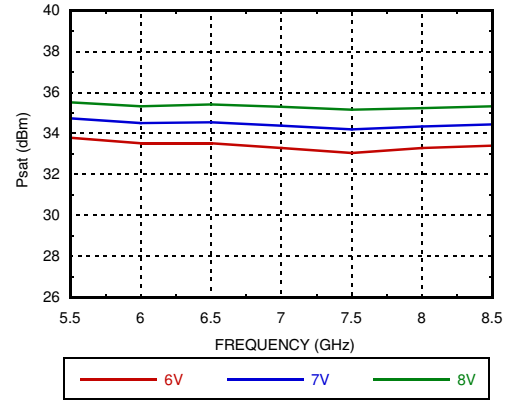


**P1dB vs. Supply Current**

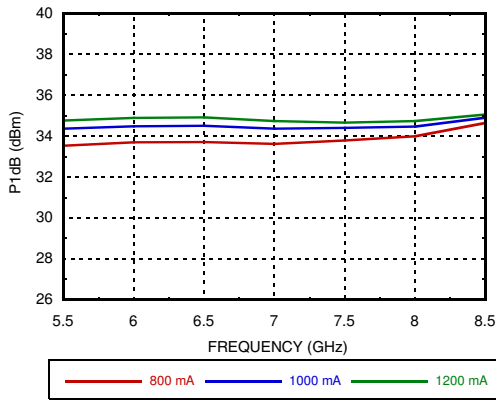


**Psat vs. Supply Current**

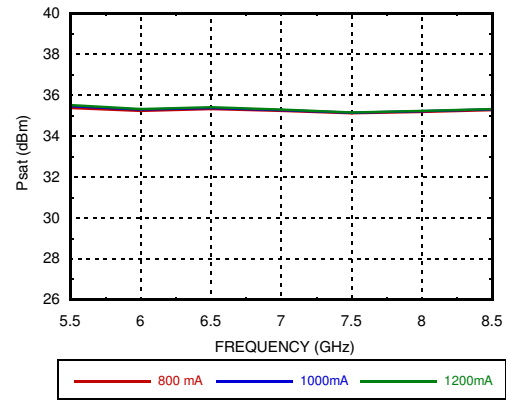

**Output IP3 vs. Temperature,  
Pout/tone = +20 dBm**

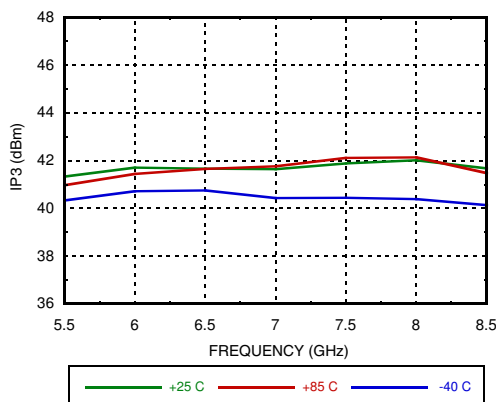


**Output IP3 vs. Supply Current,  
Pout/tone = +20 dBm**

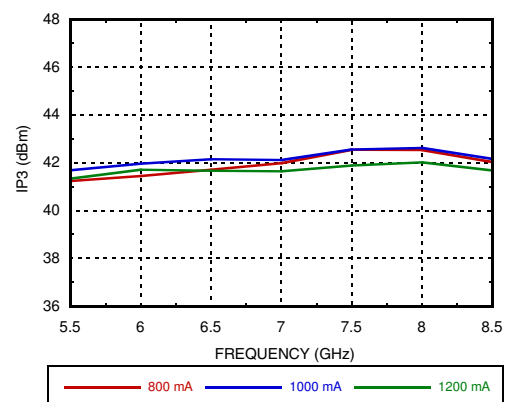




**GaAs pHEMT MMIC 2 WATT  
POWER AMPLIFIER, 5.5 - 8.5 GHz**


**Output IP3 vs. Supply Voltage,  
Pout/tone = +20 dBm**

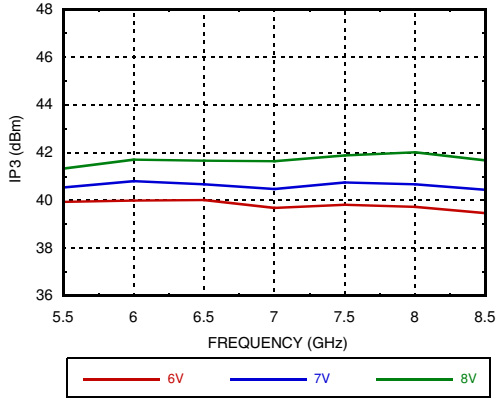


**Output IM3 @ Vdd = +6V**

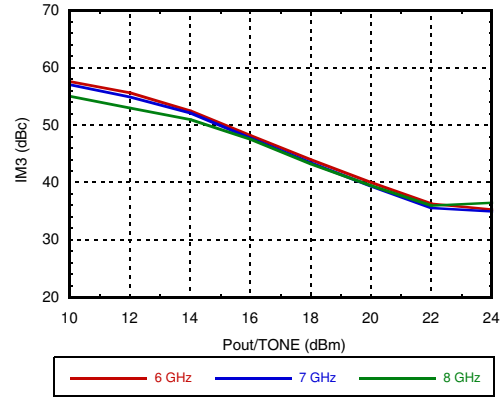


**Output IM3 @ Vdd = +7V**

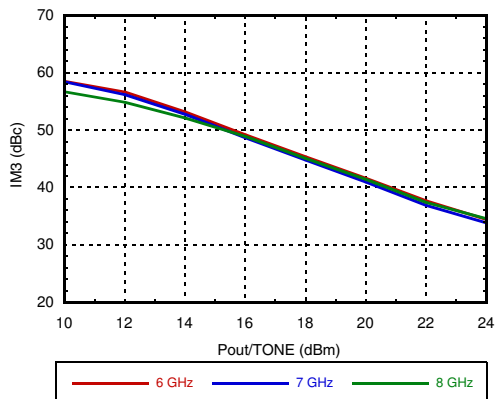


**Output IM3 @ Vdd = +8V**

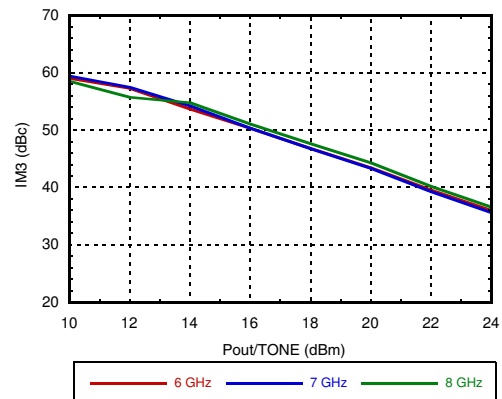

**Power Compression @ 6 GHz**

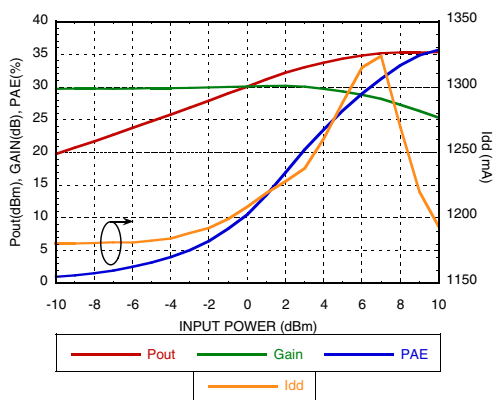


**Power Compression @ 7 GHz**

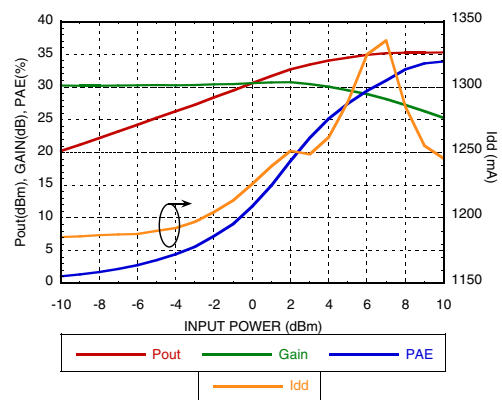




**GaAs pHEMT MMIC 2 WATT POWER AMPLIFIER, 5.5 - 8.5 GHz**


**Power Compression @ 8 GHz**

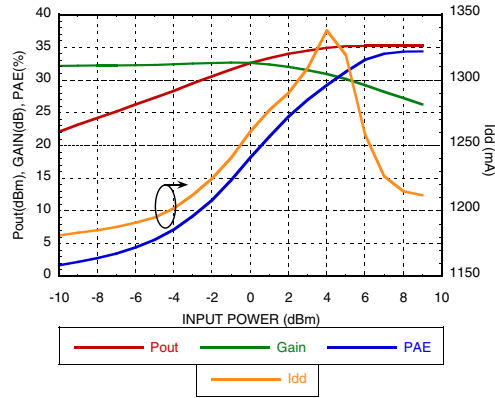


**Reverse Isolation vs. Temperature**

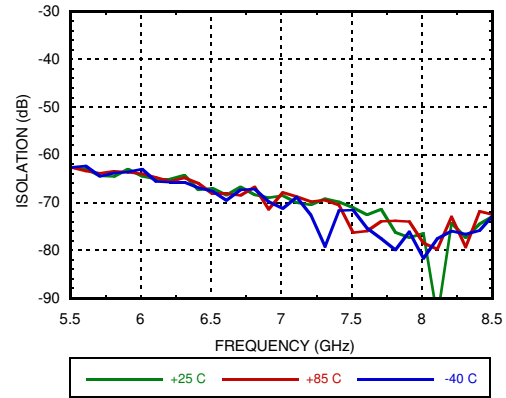


**Gain & Power vs. Supply Current @ 7 GHz**

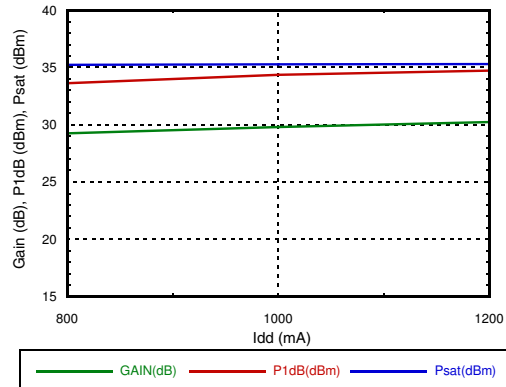

**Gain & Power vs. Supply Voltage @ 7 GHz**

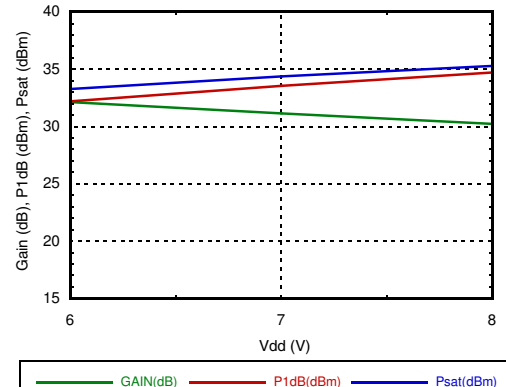

**Power Dissipation**

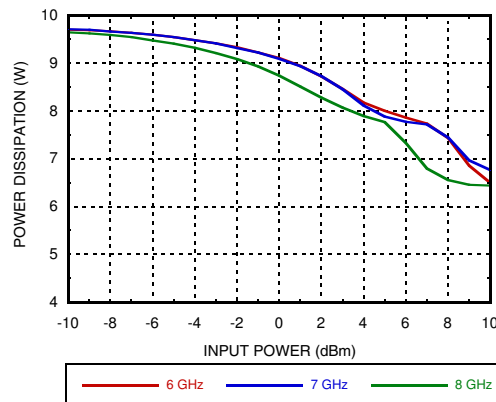



## GaAs pHEMT MMIC 2 WATT POWER AMPLIFIER, 5.5 - 8.5 GHz

### Absolute Maximum Ratings

Drain Bias Voltage (Vdd)	+9 Vdc
Gate Bias Voltage (Vgg)	-2 to -0.4 Vdc
RF Input Power (RFIN)	+22 dBm
Channel Temperature	175 °C
Continuous Pdiss (T= 85 °C) (derate 135mW/°C above 85 °C)	12.2 W
Thermal Resistance (channel to ground paddle)	7.38 °C/W
Storage Temperature	-65 to 150 °C
Operating Temperature	-40 to 85 °C
ESD Sensitivity (HBM)	Class 1A, passed 250V

### Typical Supply Current vs. Vdd


Vdd (V)	Idd (mA)
+6	1200
+7	1200
+8	1200

Adjust Vgg to achieve Idd = 1200 mA



**ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS**

### Outline Drawing

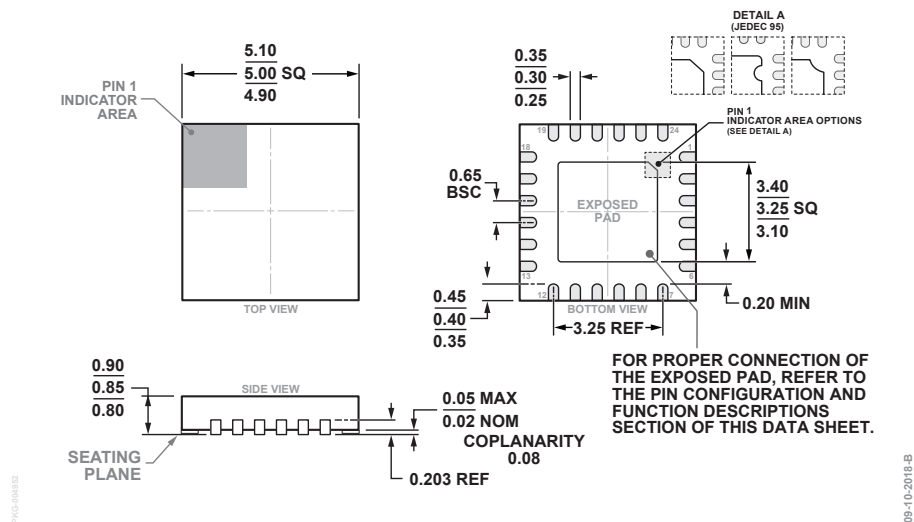

24-Lead Lead Frame Chip Scale Package [LFCSFP]  
5 mm x 5 mm Body and 0.85 mm Package Height  
(CP-24-20)

Dimensions shown in millimeters.

### Package Information

Part Number	Package Body Material	Lead Finish	MSL Rating [2]	Package Marking [1]
HMC7357LP5GE	RoHS-compliant Low Stress Injection Molded Plastic	100% matte Sn	MSL3	H7357 XXXX






[1] 4-Digit lot number XXXX

[2] Max peak reflow temperature of 260 °C




## GaAs pHEMT MMIC 2 WATT POWER AMPLIFIER, 5.5 - 8.5 GHz

### Pin Descriptions

Pad Number	Function	Description	Interface Schematic
1, 4, 5, 6, 7, 9, 12, 13, 14, 17, 18, 19, 22, 24	N/C	These pins are not connected internally; however all data shown herein was measured with these pins connected to RF/DC ground externally.	
2, 15	GND	These pins and exposed ground paddle must be connected to RF/DC ground.	
3	RFIN	This pin is DC coupled and matched to 50 Ohms.	
8, 23	Vgg2, Vgg1	Gate control for PA. Adjust Vgg to achieve recommended bias current. External bypass capacitors of 100 pF, 10 nF, and 4.7 μF are required. Apply Vgg bias to either pin 8 or pin 23.	
10, 11, 20, 21	Vdd3, Vdd4, Vdd2, Vdd1	Drain bias voltage for the amplifier. External bypass capacitors of 100 pF, 10 nF, and 4.7 μF are required.	
16	RFOUT	This pin is DC coupled and matched to 50 Ohms.	


**Application Circuit**

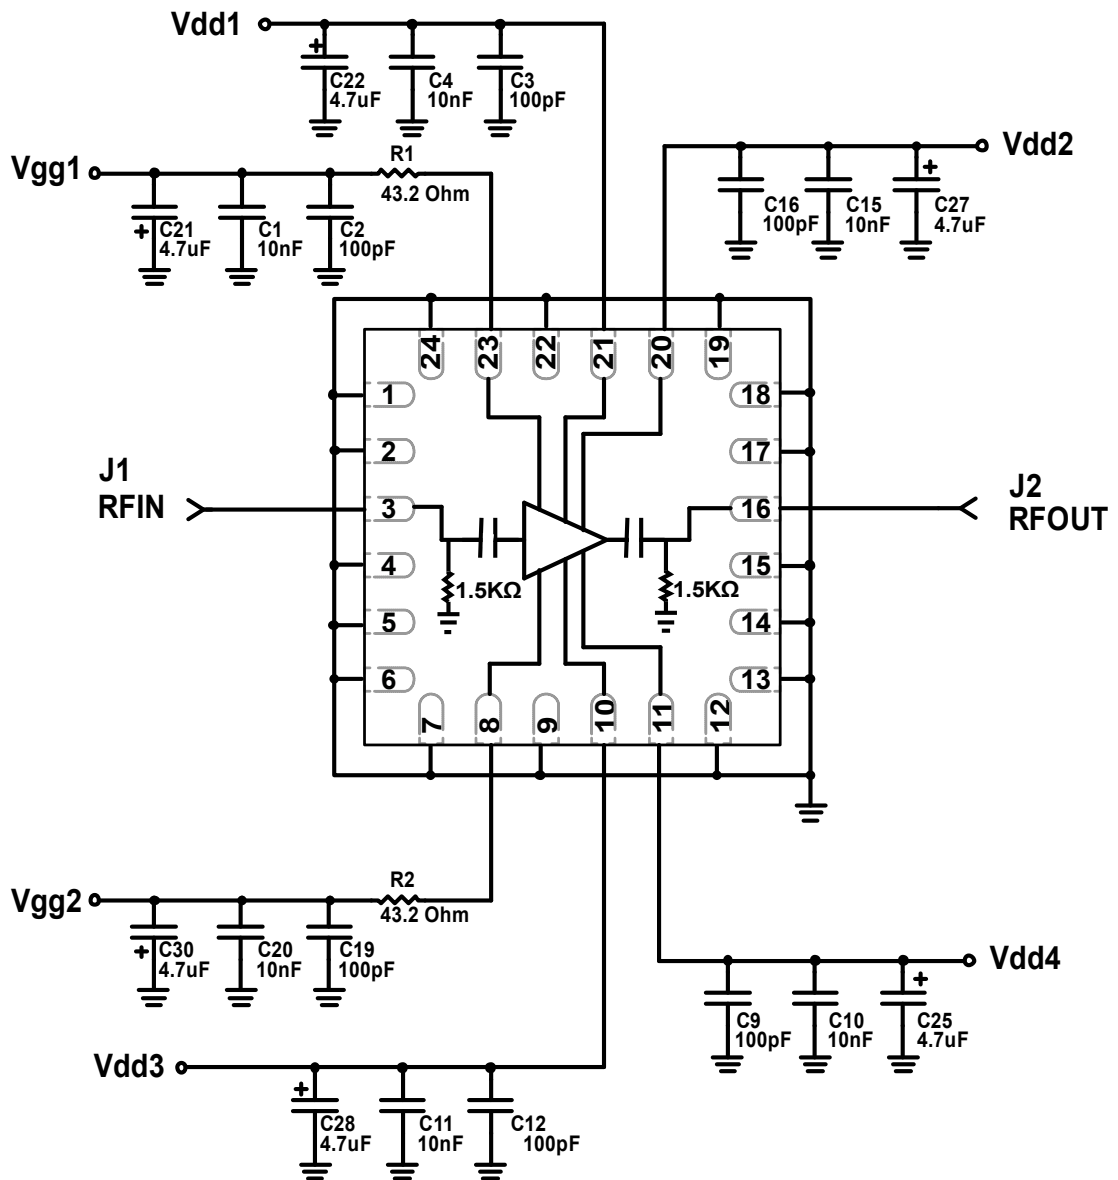



**GaAs pHEMT MMIC 2 WATT  
POWER AMPLIFIER, 5.5 - 8.5 GHz**

**Evaluation PCB**

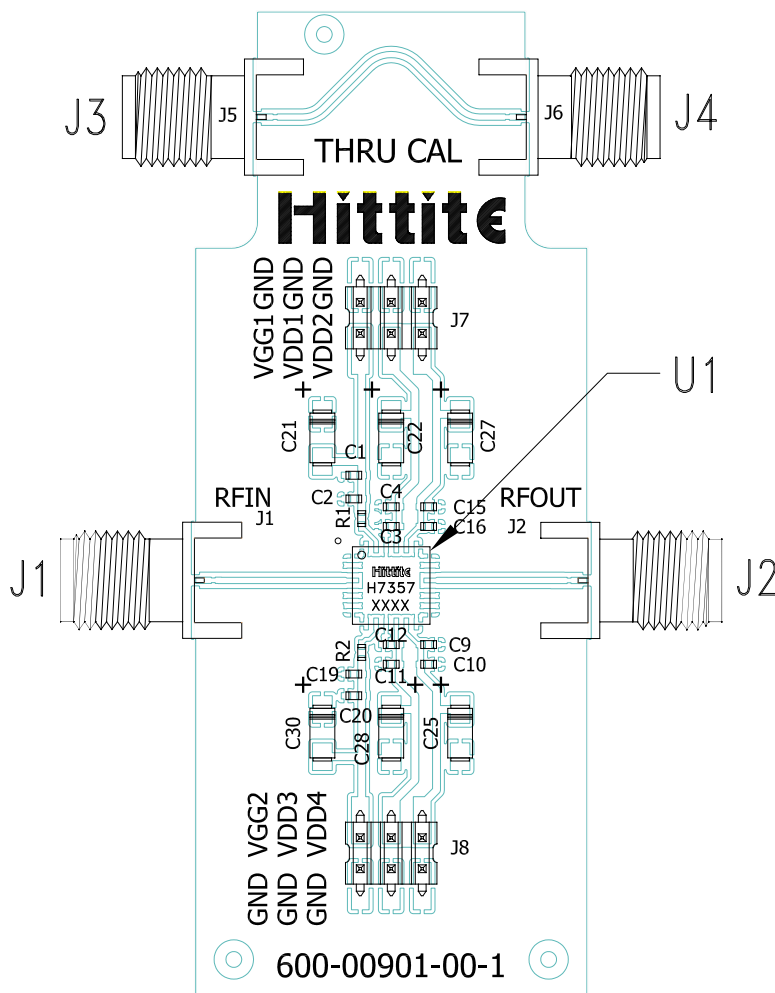

**List of Materials for Evaluation PCB EV1HMC7357LP5 [1]**

Item	Description
J1 - J4	"K" Connector, SRI
J7, J8	DC Pin
C2, C3, C9, C12, C16, C19	100 pF Capacitor, 0402 Pkg.
C1, C4, C10, C11, C15, C20	10000 pF Capacitor, 0402 Pkg.
C21, C22, C25, C27, C28, C30	4.7 uF Capacitor, Case A Pkg.
R1, R2	43.2 Ohm Resistor, 0402 Pkg
U1	HMC7357LP5GE Amplifier
PCB [2]	600-00901-00 Eval Board

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Analog Devices, upon request.

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350



# HMC7357LP5GE

v01.0918

**GaAs pHEMT MMIC 2 WATT  
POWER AMPLIFIER, 5.5 - 8.5 GHz**

**Notes:**