


Coaxial Directional Coupler

50Ω 5 to 1000 MHz

ZX30-20-4-S+



Generic photo used for illustration purposes only

CASE STYLE: FL905

| Connectors | Model |
|------------|--------------|
| SMA | ZX30-20-4-S+ |

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature -40°C to 85°C

Storage Temperature -55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

| | |
|---------|---|
| INPUT | 1 |
| OUTPUT | 2 |
| COUPLED | 3 |

Features

- very flat coupling
- very broad, multi-octave
- all welded construction
- protected by U.S. Patents 6,140,887 & 6,784,521 & 6,790,049

Applications

- VHF/UHF
- instrumentation
- communications receivers & transmitters
- cable tv


Directional Coupler Electrical Specifications (T_{AMB} = 25°C)

| FREQ. (MHz) | COUPLING (dB) | | MAINLINE LOSS ¹ (dB) | | | | | | DIRECTIVITY (dB) | | | | | | VSWR (:1) | POWER INPUT, W | | |
|--------------------------------|---------------|---------------|---------------------------------|------|------|------|------|------|------------------|------|------|------|------|------|-----------|----------------|------|----|
| | Nom. | Typ. Flatness | L | | M | | U | | L | | M | | U | | | Typ. | L | MU |
| f _L -f _U | | | Typ. | Max. | Typ. | Max. | Typ. | Max. | Typ. | Min. | Typ. | Min. | Typ. | Min. | Typ. | Max. | Max. | |
| 5-1000 | 20.5±0.6 | ±0.5 | 0.3 | 0.5 | 0.35 | 0.6 | 0.6 | 0.9 | 21 | 19 | 22 | 19 | 19 | 11 | 1.11 | 1.0 | 1.0 | |

L = low range [f_L to 10 f_L] M = mid range [10 f_L to f_U/2] U = upper range [f_U/2 to f_U]

1. Mainline loss includes theoretical power loss at coupled port.

Outline Drawing

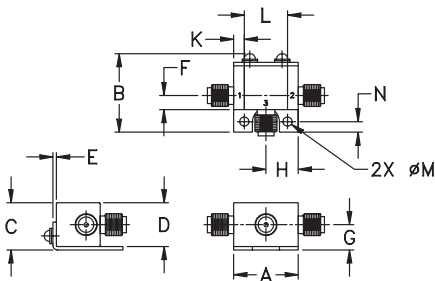

Outline Dimensions (inch/mm)


| A | B | C | D | E | F | G |
|-------|-------|-------|-------|------|------|------|
| .74 | .90 | .54 | .50 | .04 | .16 | .29 |
| 18.80 | 22.86 | 13.72 | 12.70 | 1.02 | 4.06 | 7.37 |

| H | J | K | L | M | N | wt |
|------|----|------|-------|------|------|-------|
| .37 | -- | .122 | .496 | .106 | .122 | grams |
| 9.40 | -- | 3.10 | 12.60 | 2.69 | 3.10 | 20.0 |


Typical Performance Data

| Frequency (MHz) | Mainline Loss (dB) In-Out | Coupling (dB) In-Cpl | Directivity (dB) | Return Loss (dB) | | |
|-----------------|---------------------------|----------------------|------------------|------------------|-------|-------|
| | | | | In | Out | Cpl |
| 20.00 | 0.29 | 20.09 | 21.35 | 29.65 | 33.25 | 27.81 |
| 100.00 | 0.29 | 20.12 | 22.22 | 29.95 | 33.34 | 27.20 |
| 180.00 | 0.32 | 20.16 | 23.67 | 30.03 | 32.96 | 25.43 |
| 260.00 | 0.33 | 20.17 | 26.11 | 30.01 | 32.22 | 23.53 |
| 340.00 | 0.34 | 20.18 | 29.14 | 29.95 | 31.83 | 21.53 |
| 450.00 | 0.36 | 20.20 | 28.63 | 30.13 | 30.82 | 19.44 |
| 575.00 | 0.41 | 20.29 | 22.50 | 30.59 | 30.09 | 17.36 |
| 750.00 | 0.46 | 20.46 | 16.86 | 32.61 | 29.81 | 15.04 |
| 875.00 | 0.51 | 20.63 | 14.14 | 35.69 | 28.84 | 13.69 |
| 1000.00 | 0.56 | 20.85 | 12.18 | 41.42 | 27.44 | 12.56 |


ZX30-20-4-S+ MAINLINE LOSS

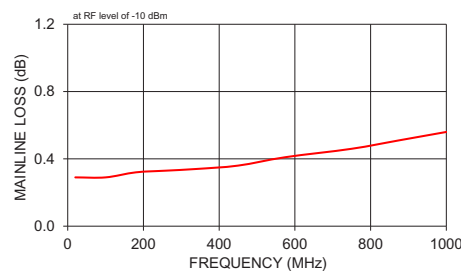


ZX30-20-4-S+ COUPLING & DIRECTIVITY

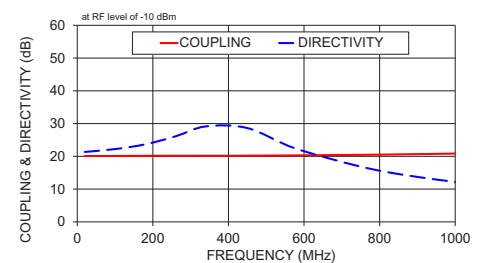

ZX30-20-4-S+ RETURN LOSS

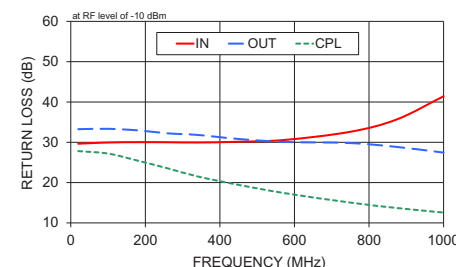

Electrical Schematic

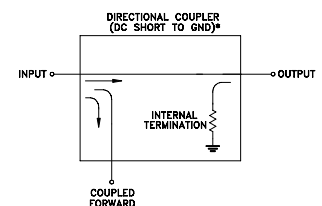

* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) THAT ROUTES DC FROM RF PORTS TO GROUND.

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/WCLStore/terms.jsp

