

SMV1265 Series Datasheet by Skyworks Solutions Inc.

[View All Related Products](#) | [Download PDF Datasheet](#)



DATA SHEET

SMV1265 Series Hyperabrupt Junction Tuning Varactors

Applications

- Wideband RF and microwave VCOs
- Analog phase shifters
- Digital TV tuners


Features

- High tuning ratio
- Low series resistance
- Designed for high volume, low-cost applications
- Small footprint packages (MSL1, 260 °C per JEDEC J-STD-020)

Description

The SMV1265 series of hyperabrupt junction tuning varactors are designed for very high capacitance tuning ratios with low series resistance, which makes these devices especially attractive for wideband Voltage Controlled Oscillator (VCO) applications.

The packaging options are defined in Table 1. The absolute maximum ratings of the SMV1265 varactor series are provided in Table 2. Electrical specifications are specified in Table 3. Figure 1 shows the typical performance of capacitance versus voltage. The SPICE model for the SMV1265 series is shown in Figure 2 and the associated model parameters are provided in Table 4. The relationship between voltage and capacitance for the SMV1265 series is shown in Table 5.

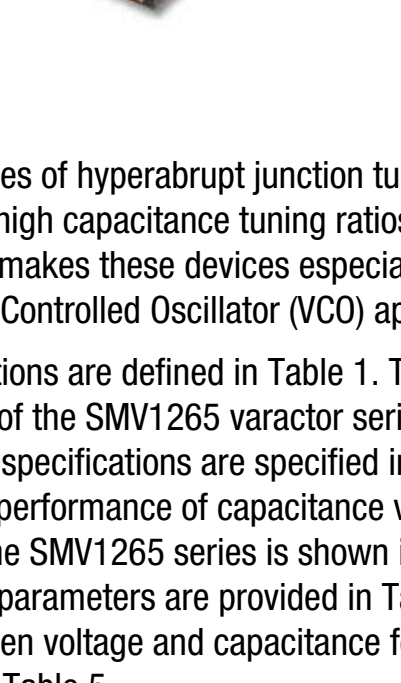

Skyworks Green™ products are compliant with all applicable legislation and are halogen-free. For additional information, refer to Skyworks Definition of Green™, document number S004-0074.

Table 1. Packaging and Marking

Package	Marking
Single	Single
SOD-323 Green™	SOD-323 Green™
SMV1265-011LF Marking: HM	SMV1265-040LF Marking: HD1
LS = 1.7 nH	LS = 0.45 nH

The Pb-free symbol or "LF" in the part number denotes a lead-free, RoHS-compliant package unless otherwise noted as Green™. Tin/Lead (Sn/Pb) packaging is not recommended for new designs.

Skyworks Solutions, Inc. • Phone [781] 376-3000 • Fax [781] 376-3100 • sales@skyworksinc.com • www.skyworksinc.com
200063J • Skyworks Proprietary Information • Products and Product Information are Subject to Change Without Notice • October 7, 2014

DATA SHEET • SMV1265 SERIES HYPERABRUPT JUNCTION TUNING VARACTORS

Table 2. SMV1265 Series Absolute Maximum Ratings (Note 1)

Parameter	Symbol	Minimum	Typical	Maximum	Units
Power dissipation	P _{tot}			250	mW
Forward current	I _f			20	mA
Operating temperature	T _{op}	-55		+125	°C
Storage temperature	T _{stg}	-55		+150	°C

Note 1: Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to device with only one parameter set at the limit and all other parameters set at or below their nominal value. Exceeding any of the limits listed here may result in permanent damage to the device.

CAUTION: Although this device is designed to be as robust as possible, electrostatic discharge (ESD) can damage this device. These devices must be protected at all times from ESD. Static charges may easily produce potentials of several kilovolts on the human body or equipment, which can discharge without detection. Industry-standard ESD precautions should be used at all times.

Table 3. SMV1265 Series Electrical Specifications (Note 1) (Top = 25 °C, Unless Otherwise Noted)

Parameter	Symbol	Test Condition	Min	Typical	Max	Units
Reverse leakage current	I _r	V _r = 26 V			20	nA
Reverse breakdown voltage	V _{br}	I _r = 10 μA	28			V
Capacitance	C ₀	V _r = 1 V, f = 1 MHz	12.5	13.8	14.7	pF
Capacitance ratio	C ₁ /C ₀	V _r = 26 V, f = 1 MHz	0.58	0.70	0.83	pF
Series resistance	R _s	V _r = 1 V, f = 470 MHz	17.7	19.5	20	Ω
				2.4		Ω

Note 1: Performance is guaranteed only under the conditions listed in this table.

Skyworks Solutions, Inc. • Phone [781] 376-3000 • Fax [781] 376-3100 • sales@skyworksinc.com • www.skyworksinc.com
October 7, 2014 • Skyworks Proprietary Information • Products and Product Information are Subject to Change Without Notice • 200063J

DATA SHEET • SMV1265 SERIES HYPERABRUPT JUNCTION TUNING VARACTORS

Typical Performance Characteristics

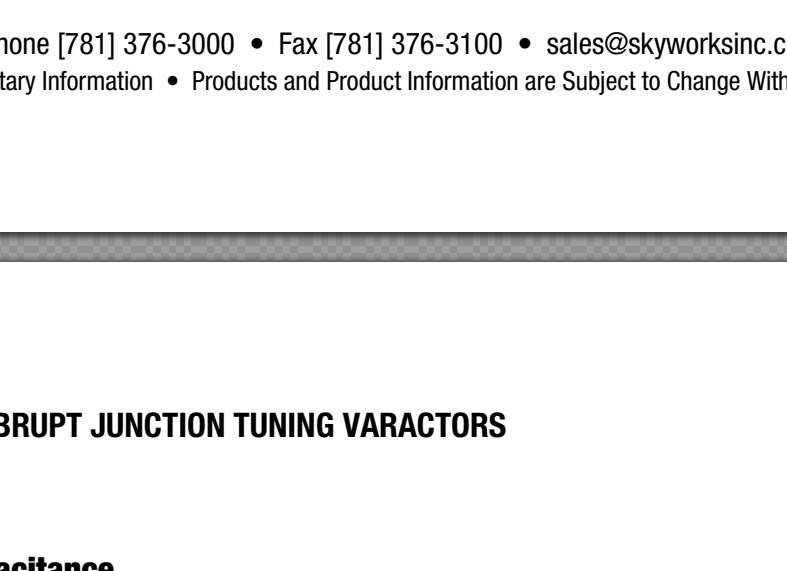


Figure 1. Capacitance vs Voltage @ 25 °C

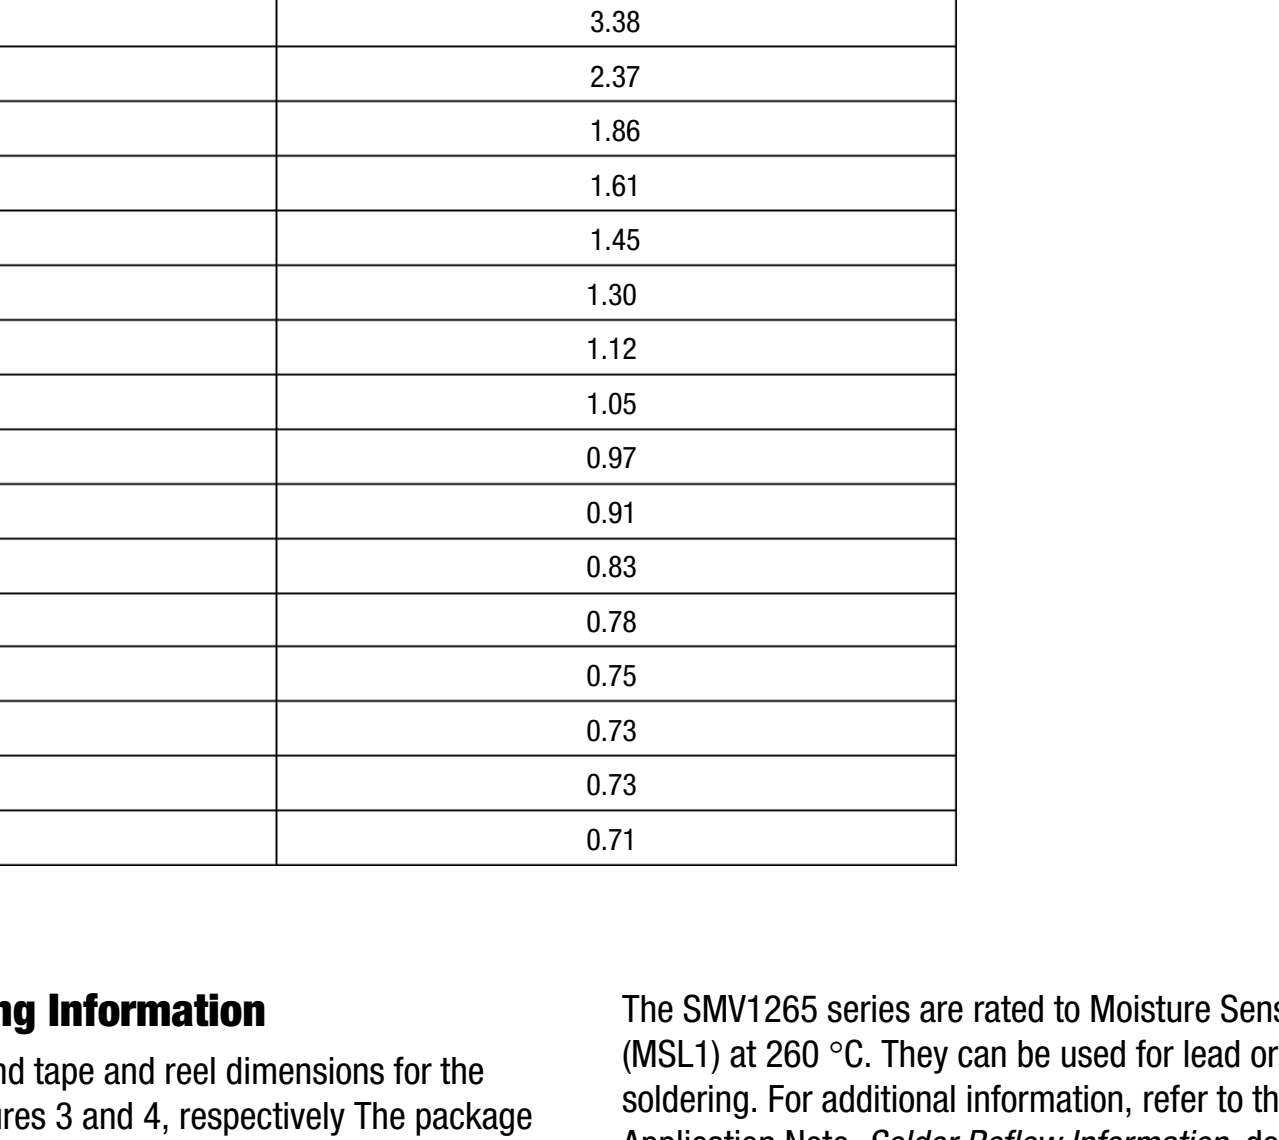


Figure 2. SPICE Model

Table 4. SPICE Model Parameters

Part Number	C ₀ (pF)	V ₀ (V)	M	C _p (pF)	R _s (Ω)	L _s (nH)
SMV1265-011LF	22.5	30	13	0.71	2.4	1.7
SMV1265-040LF	22.5	30	13	0.71	2.4	0.45

Skyworks Solutions, Inc. • Phone [781] 376-3000 • Fax [781] 376-3100 • sales@skyworksinc.com • www.skyworksinc.com
October 7, 2014 • Skyworks Proprietary Information • Products and Product Information are Subject to Change Without Notice • 200063J

DATA SHEET • SMV1265 SERIES HYPERABRUPT JUNCTION TUNING VARACTORS

Table 5. SMV1265 Series Voltage vs Capacitance

Voltage (V)	Typical Capacitance (C) (pF)
0	22.47
0.5	17.41
1.0	14.26
2.0	10.23
3.0	7.40
4.0	5.15
5.0	3.38
6.0	2.97
7.0	1.86
8.0	1.61
9.0	1.45
10	1.30
12	1.12
14	1.05
16	0.97
18	0.91
20	0.83
22	0.78
24	0.75
26	0.73
28	0.73
30	0.71

Package and Handling Information

The package dimensions and tape and reel dimensions for the SOD-323 are shown in Figures 3 and 4, respectively. The package dimensions and tape and reel dimensions for the SOD-882 are shown in Figures 5 and 6, respectively.

Instructions on the shipping container label regarding exposure to moisture after the container seal is broken must be followed. Otherwise, problems related to moisture absorption may occur when the part is subjected to high temperature during solder assembly.

The SMV1265 series are rated to Moisture Sensitivity Level 1 (MSL1) at 260 °C. They can be used for lead or lead-free soldering. For additional information, refer to the Skyworks Application Note, *Solder Reflow Information*, document number 200164.

Care must be taken when attaching this product, whether it is done manually or in a production solder reflow environment. Production quantities of this product are shipped in a standard tape and reel format.

Skyworks Solutions, Inc. • Phone [781] 376-3000 • Fax [781] 376-3100 • sales@skyworksinc.com • www.skyworksinc.com
October 7, 2014 • Skyworks Proprietary Information • Products and Product Information are Subject to Change Without Notice • 200063J

DATA SHEET • SMV1265 SERIES HYPERABRUPT JUNCTION TUNING VARACTORS

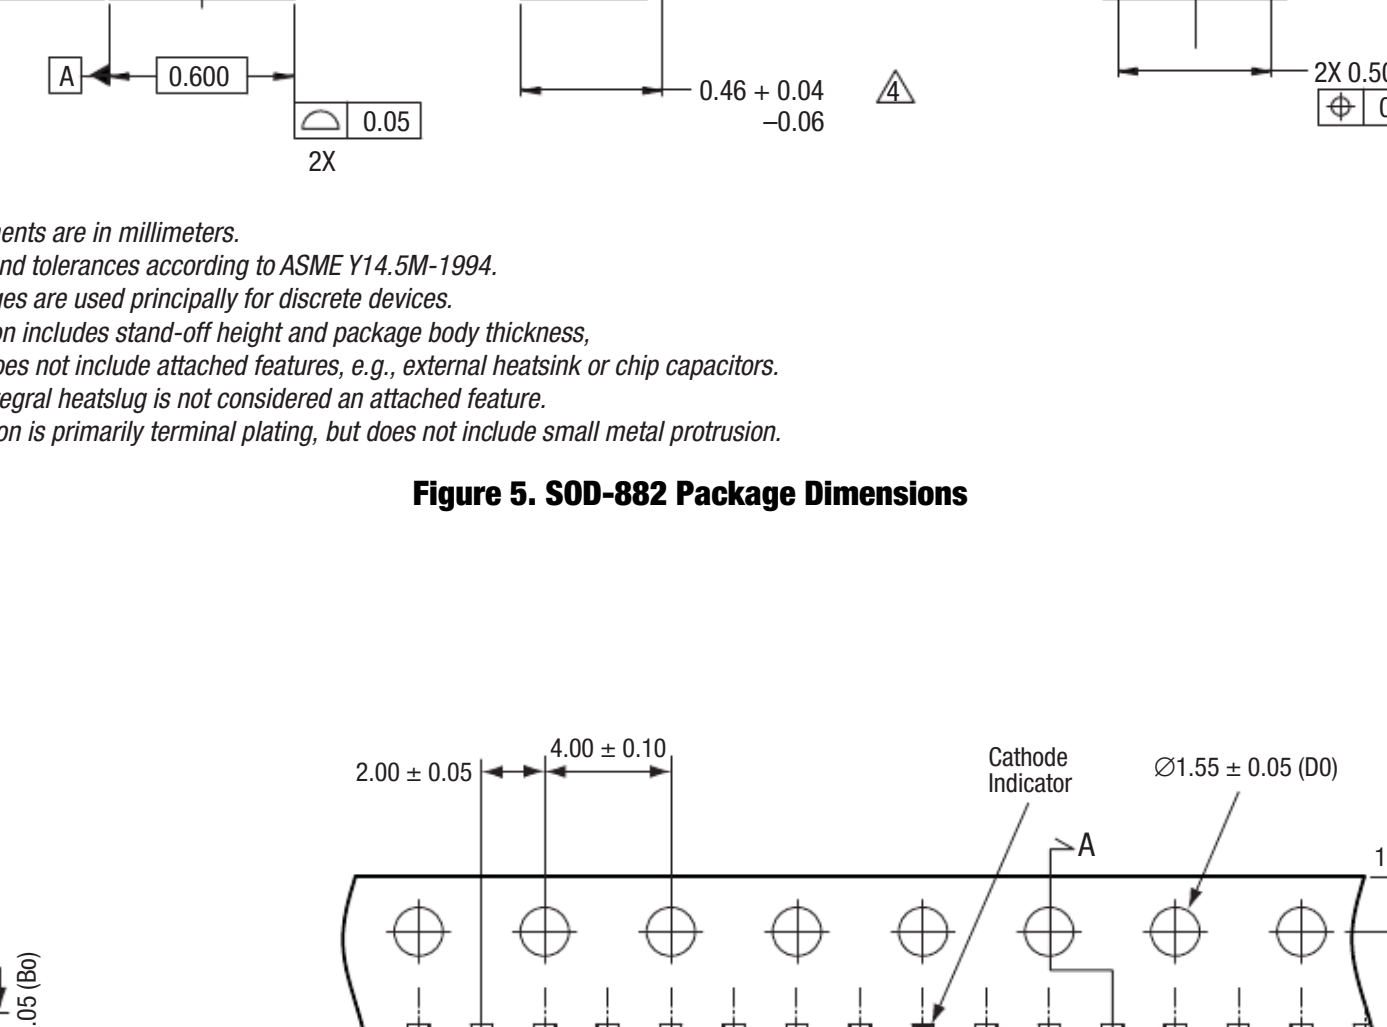


Figure 3. SOD-323 Package Dimensions

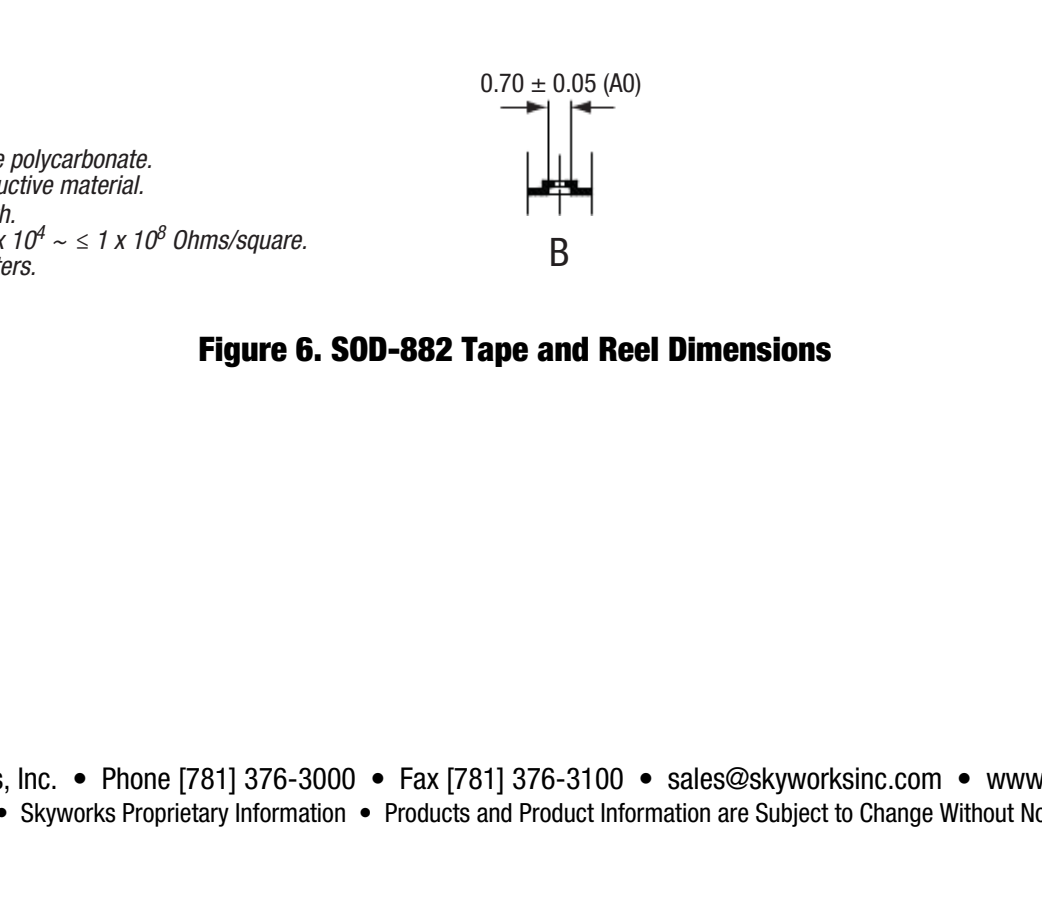


Figure 4. SOD-323 Tape and Reel Dimensions

Skyworks Solutions, Inc. • Phone [781] 376-3000 • Fax [781] 376-3100 • sales@skyworksinc.com • www.skyworksinc.com
200063J • Skyworks Proprietary Information • Products and Product Information are Subject to Change Without Notice • October 7, 2014

DATA SHEET • SMV1265 SERIES HYPERABRUPT JUNCTION TUNING VARACTORS

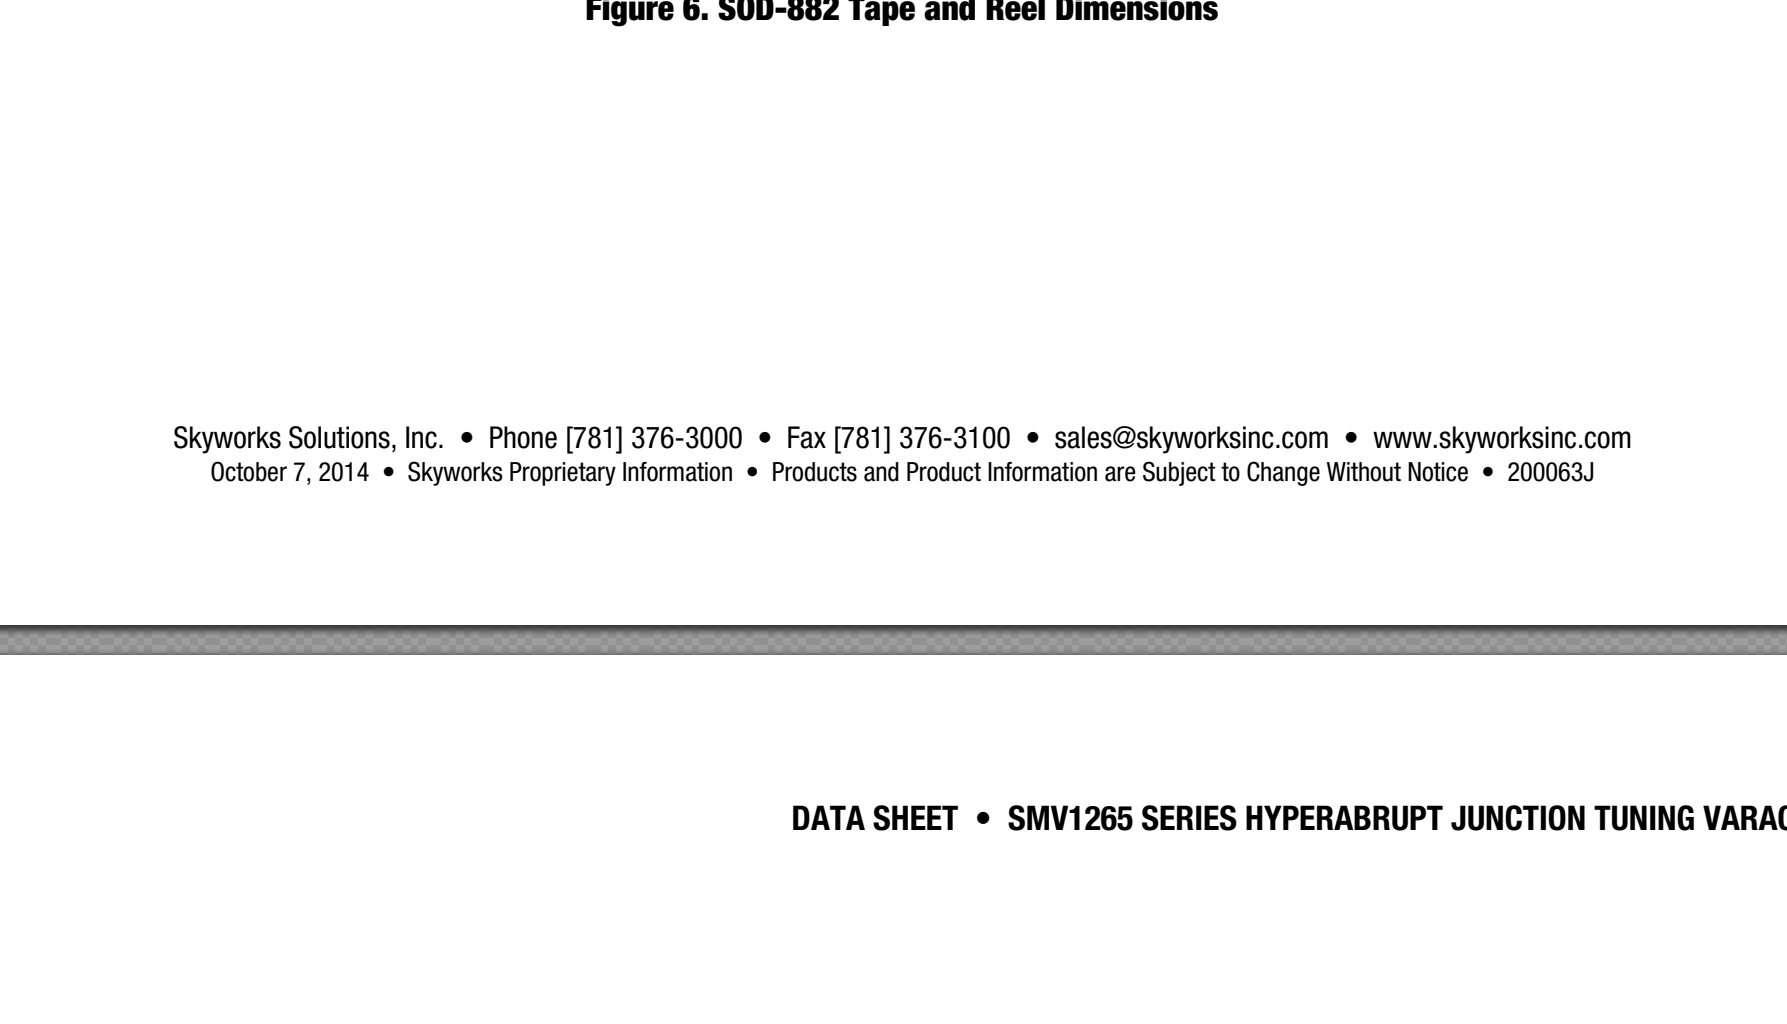


Figure 5. SOD-882 Package Dimensions



Figure 6. SOD-882 Tape and Reel Dimensions

Skyworks Solutions, Inc. • Phone [781] 376-3000 • Fax [781] 376-3100 • sales@skyworksinc.com • www.skyworksinc.com
October 7, 2014 • Skyworks Proprietary Information • Products and Product Information are Subject to Change Without Notice • 200063J

DATA SHEET • SMV1265 SERIES HYPERABRUPT JUNCTION TUNING VARACTORS

DIODE VARACTOR 30V 20MA SOD323 SMV1265-011LF	DIODE VARACTOR 30V 20MA SOD323 SMV1265-011LF	DIODE VARACTOR 30V 20MA SOD323 SMV1265-011LF
---	---	---

Copyright © 2002-2007, 2009-2011, 2014 Skyworks Solutions, Inc. All Rights Reserved.

Information in this document is provided in connection with Skyworks Solutions, Inc. ("Skyworks") products or services. These materials, including the information contained herein, are provided by Skyworks as a service to its customers and may be used for informational purposes only by the customer. Skyworks assumes no responsibility for errors or omissions in these materials or the information contained herein. Skyworks may change its documentation, products, services, specifications or product descriptions at any time, without notice. Skyworks makes no liability for updates to the materials or information and shall have no responsibility whatsoever for intellectual property rights by this document. Skyworks assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Skyworks products, information or materials, except as may be provided in Skyworks Terms and Conditions of Sale.

No license, whether express, implied, by estoppel or otherwise, is granted to any individual or entity for the use of any intellectual property rights by this document. Skyworks assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Skyworks products, information or materials, except as may be provided in Skyworks Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT. ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. SKYWORKS DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. SKYWORKS SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Skyworks products are not intended for use in medical, lifesaving or life-sustaining applications, or other equipment in which the failure of the Skyworks products could lead to personal injury, death, physical or environmental damage. Skyworks customers using or selling Skyworks products for use in such applications do so at their own risk and agree to fully indemnify Skyworks for any damages resulting from such improper use or sale.

Customers are responsible for their products and applications using Skyworks products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Skyworks assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Skyworks products outside of stated published specifications or parameters.

Skyworks and the Skyworks symbol are trademarks or registered trademarks of Skyworks Solutions, Inc., in the United States and other countries. Third-party brands and names are for identification purposes only, and are the property of their respective owners. Additional information, including relevant terms and conditions, posted at www.skyworksinc.com, are incorporated by reference.

Skyworks Solutions, Inc. • Phone [781] 376-3000 • Fax [781] 376-3100 • sales@skyworksinc.com • www.skyworksinc.com
200063J • Skyworks Proprietary Information • Products and Product Information are Subject to Change Without Notice • October 7, 2014

Products related to this Datasheet

DIODE VARACTOR 30V 20MA SOD323 SMV1265-011LF	DIODE VARACTOR 30V 20MA SOD323 SMV1265-011LF	DIODE VARACTOR 30V 20MA SOD323 SMV1265-011LF
---	---	---

Information United States International
Terms & Conditions TechForum API Solutions About Digi-Key Newsroom Site Map Supported Browsers Tariff Information Privacy Statement Careers

Download on the App Store GET IT ON Google Play

Copyright © 1995-2019, Digi-Key Electronics. All Rights Reserved. 701 Brooks Avenue South, Thief River Falls, MN 56701 USA

ECIA MEMBER Supporting The Authorized Channel