



MEMS Oscillator

JSO LC series · 1.8 V

- low power oscillator with HCMOS/LVCMOS output
- compatible to industry standard packages 2016 – 7050
- extended shock & vibration resistance & temperature range
- configured to customer's specification
- very fast delivery service



RoHS compliant



Pb free



REACH compliant



Conflict mineral free

actual size



GENERAL DATA	
TYPE	JSOxxCxLC 1.8 V
frequency range	1.0 ~ 110.0 MHz 115.0 ~ 137.0 MHz
frequency stability over all	±20 ppm ~ ±50 ppm (see table 1)
current consumption	see table 2
supply voltage V_{DC}	1.8 V ± 10%
temperature	operating
	storage
output	logic
	rise & fall time
	load max.
	current max.
	low level max.
	high level min.
	standby function (e/d)
output enable time max.	
output disable time max.	
start-up time max.	
standby current max.	
phase jitter 12 kHz ~ 20 MHz	
symmetry at 0.5 x VDC	

note: some frequencies can't be configured, see table 5.

TABLE 1: FREQUENCY STABILITY CODE					
stability code / temp. code*		B ±50 ppm	G ±30 ppm	C ±25 ppm	D ±20 ppm
-20°C ~ +70°C	T0	○	○	○	○
-40°C ~ +85°C	T1	○	○	○	○
-40°C ~ +105°C	T2	○	○	○	○
-40°C ~ +125°C	T3	○	○	○	○
-55°C ~ +125°C	T8	○	○	○	○

○ available

* includes stability at 25°C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.


TABLE 2: CURRENT CONSUMPTION TYP. (FOR MAX. ADD 30%)					
current at load	5 pF	15 pF	30 pF	60 pF	unit
output disabled	3.5	3.5	3.5	3.5	mA
1.0 ~ 19.9 MHz	3.6	3.9	4.4	5.5	mA
20.0 ~ 29.9 MHz	4.2	4.5	5.4	6.5	mA
30.0 ~ 49.9 MHz	4.5	5.1	6.5		mA
50.0 ~ 79.9 MHz	4.9	6.3			mA
80.0 ~ 110.0 MHz	5.7	7.6			mA
115.0 ~ 137.0 MHz	(8.0)	(13.0)			mA

note: current at default edge control setting "D", also refer to table 4.

TABLE 3: CONFIGURABLE STANDBY FUNCTION OPTIONS (E/D)		
pin #1 (e/d control)	option	functionality
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	S = Stop	output weakly pulled down, oscillator in sleep mode
	T = TriState	output high impedance, oscillator operates
	N = None	oscillator output active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	all	oscillator output active
open*	all	oscillator output active

* a pull up resistor is recommended in EMI stressed circuit environments.

PACKAGING NOTE / MARKING
QTY < 250 pcs. → cut tape
QTY 250/500/1K/3K pcs. → tape and reel
Marking: lot code only

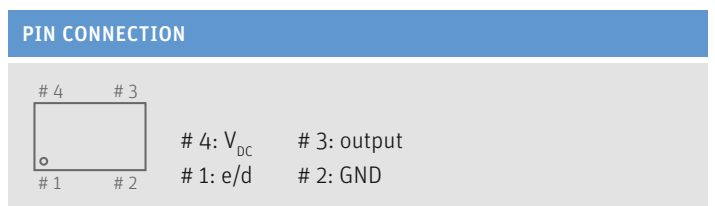

B.C.E. S.r.l. - Via Regina Pacis, 54/c - Sassuolo (MO) - I 41049 - Italy
 Tel.: 0536 811616 - Fax: 0536 811500 - Web: www.bce.it - E-mail: bce@bce.it

Jauch MEMS – Uses SiTime's MEMS First™ technology

03052019



Jauch Quartz GmbH • e-mail: info@jauch.com • full data can be found under: www.jauch.com
 All specifications are subject to change without notice

MEMS Oscillator · JSO LC series · 1.8 V

TABLE 4: MAX. RISE & FALL TIME VS. LOAD CAPACITANCE

C _L	5 pF	15 pF	30 pF	5 pF	15 pF	30 pF
edge control	at 10% ~ 90% of V _{DC} (ns)			at 20% ~ 80% of V _{DC} (ns)		
D = 0*	1.8	4.2	6.8	1.2	2.8	4.8
1	2.2	5.0	7.6	1.4	3.4	5.2
2	2.4	5.6	8.8	1.6	3.8	6.0
3	2.8	6.0	10.0	1.8	4.2	6.8
4	4.8	9.8	17.0	3.4	6.6	11.6
5	6.6	12.6	21.0	4.4	8.6	15.0
6	10.0	18.0	32.0	6.6	12.0	22.0
7	18.0	34.0	62.0	12.4	24.0	44.0

* default edge control setting "D" at VDC = 1.8 V, please also refer to the supplementary information on [our homepage](#) for typical values and more details.


TABLE 5: NON-CONFIGURABLE FREQUENCIES

operating temperature option		operating temperature option	
T2 - (-40°C ~ +105°C)		T8 - (-55°C ~ +125°C)	
T3 - (-40°C ~ +125°C)			
from (MHz)	to (MHz)	from (MHz)	to (MHz)
61.223	61.674	61.223	61.974
69.796	70.485	69.240	70.827
79.063	79.162	78.715	79.561
81.428	82.232	80.160	80.174
91.834	92.155	80.780	82.632
94.249	94.430	91.834	95.474
94.875	94.994	96.192	96.209
97.714	98.679	96.936	99.158
110.0	115.194	110.0	119.342
117.811	118.038	-	-
118.594	118.743	120.239	120.262
122.142	122.705	121.170	121.243
123.022	123.348	121.601	123.948

ORDER INFORMATION

EXAMPLE

O = Oscillator
frequency (8 digits), see also table 5 1.0 ~ 110.0 MHz 115.0 ~ 137.0 MHz
JSO = Jauch Silicon Oscillator
package 75 = 7050 22 = 2520 53 = 5032 21 = 2016 32 = 3225
frequency range C1 = 1.0 ~ 110.0 MHz C2 = 115.0 ~ 137.0 MHz
function/feature L = lowpower
output I/F C = (H)CMOS

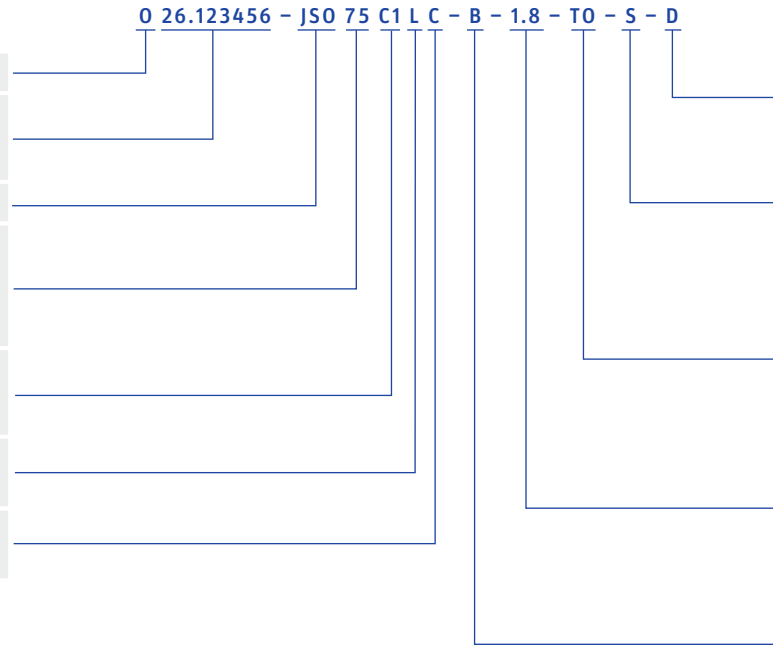


edge control D = default 0 - 7, see table 4
standby function options S = Stop T = TriState N = None
temperature range T0 = -20°C ~ + 70°C T1 = -40°C ~ + 85°C T2 = -40°C ~ +105°C T3 = -40°C ~ +125°C T8 = -55°C ~ +125°C
supply voltage 3.3 = 3.3 V 2.5 = 2.5 V 3.0 = 3.0 V 1.8 = 1.8 V 2.8 = 2.8 V 2V3 = 2.5 V ~ 3.3 V
frequency stability overall B = ± 50 ppm G = ± 30 ppm C = ± 25 ppm D = ± 20 ppm

MEMS Oscillator · JSO LC series · 1.8 V

DIMENSIONS


2.0 x 1.6 x 0.75
JSO21 LC




top view



side view




bottom view



pad layout


2.5 x 2.0 x 0.75
JSO22 LC




top view



side view




bottom view



pad layout


3.2 x 2.5 x 0.75
JSO32 LC




top view



side view




bottom view



pad layout


5.0 x 3.2 x 0.75
JSO53 LC




top view



side view




bottom view



pad layout


7.0 x 5.0 x 0.90
JSO75 LC




top view



side view



bottom view



pad layout




in mm

Pin connection # 1: e/d # 2: GND # 3: output # 4: V_{DC} note: a capacitor of 0.1 μF between V_{DC} and GND is recommended

MEMS Oscillator · JSO LC series · 1.8 V




TAPING SPECIFICATION

2.0 x 1.6 x 0.75
JSO21 LC

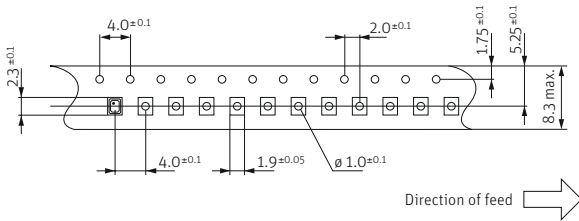




up to 3000 pcs per reel

2.5 x 2.0 x 0.75
JSO22 LC

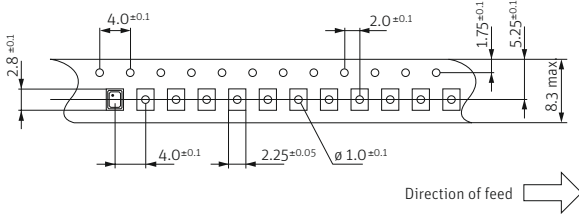




up to 3000 pcs per reel

3.2 x 2.5 x 0.75
JSO32 LC

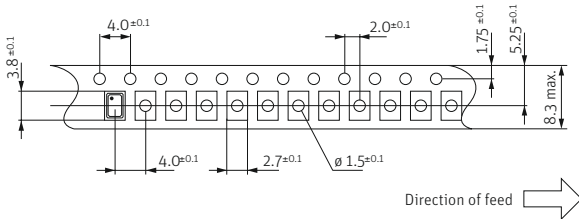




up to 3000 pcs per reel

5.0 x 3.2 x 0.75
JSO53 LC

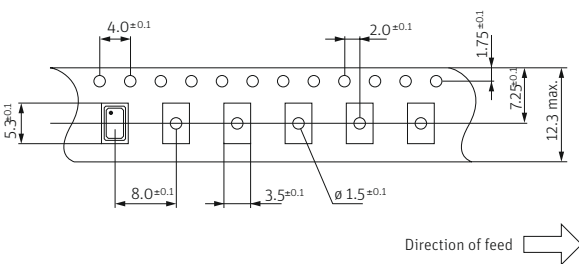

Ø 180: up to 1000 pcs per reel
Ø 330: up to 3000 pcs per reel

7.0 x 5.0 x 0.90
JSO75 LC

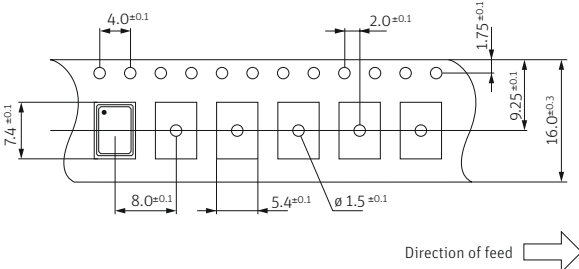

Ø 180: up to 1000 pcs per reel
Ø 330: up to 3000 pcs per reel