

NON-CATALOG

Surface Mount

Voltage Variable Equalizer

VAEQ-2150+

50Ω

950 to 2150 MHz

The Big Deal

- Adjustable attenuation slope
- Supply voltage from +3V to +5V
- IP3 +55 dBm typical
- Minimal deviation from linear loss, $\pm 0.05\text{dB}$



CASE STYLE: HE1354

Product Overview

The VAEQ-2150+ is a 50Ω Voltage Variable Equalizer built into a shielded case (size of .394"x.394"x.150"). This model offers excellent performance over a wide frequency range of 950 to 2150 MHz with the variable slope providing great flexibility in a small 10mm package.

The VAEQ-2150+ is often used to compensate RF chain gain flatness or cable loss versus frequency.

Key Features

Feature	Advantages
Low power consumption: • Supply voltage +3-5V _{DC} at max 15mA • Control voltage 0-5V at max 10 mA	Allows for high layout density of circuit boards, while minimizing affects of parasitics.
Adjustable attenuation slope (Control voltage of 0V to 5V)	Allows adjusting the slope to compensate for the precise loses encountered.
High linearity (IP3 +55 dBm typ.)	Low distortion enabling improved system performance.
Minimal deviation from linear loss over frequency range: $\pm 0.05\text{dB}$	Provides low signal distortion over the passband.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



NON-CATALOG

Surface Mount

Voltage Variable Equalizer

VAEQ-2150+

50Ω

950 to 2150 MHz

Features

- Wide bandwidth
- Low deviation from linear loss, ± 0.05 dB typ.
- High IP3 +55 dBm typ.
- Shielded case
- Aqueous washable



CASE STYLE: HE1354

Applications

- Cable loss compensation
- Instrumentation
- Satellite L Band

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications at 25°C, unless otherwise noted

Parameter	Condition	V+=3V			V+=5V			Units
		Min.	Typ.	Max.	Min.	Typ.	Max.	
Frequency Range		950		2150	950		2150	MHz
Insertion Loss	950 MHz, Control Voltage, 0 - 5V 2150 MHz, Control Voltage, 0 - 5V		12.6 - 3.2 5.9 - 6.3			12.6 - 6.6 6.1 - 7.7		dB
Deviation from Linear Loss	950 - 2150 MHz, Control Voltage 0 - 5V		± 0.1			± 0.05		dB
IP3	950 - 2150 MHz, Control Voltage: 2 - 5V	+45	+55		+45	+55		dBm
1 dB Compression	950 - 2150 MHz, Control Voltage, 0 - 5V		+30			+30		dBm
Input Return Loss	950 - 2150 MHz, Control Voltage, 0 - 5V		15			16		dB
Output Return Loss	950 - 2150 MHz, Control Voltage, 0 - 5V		10			11		dB
Supply Current	950 - 2150 MHz, Control Voltage, 5V, 950 - 2150 MHz, Control Voltage, 0V		0 4	8		3 7	15	mA
Control Current	950 - 2150 MHz, Control Voltage, 5V 950 - 2150 MHz, Control Voltage, Low ¹		5 0.4	10		3.5 0.6	6.0	mA


Note 1: Control Voltage Low is 3V for V+=5V and 2V for V+=3V.

Maximum Ratings

Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Input Power	+23 dBm
Control voltage	12 V
Supply Voltage (V+)	7 V

Permanent damage may occur if any of these limits are exceeded.

Simplified Functional Diagram

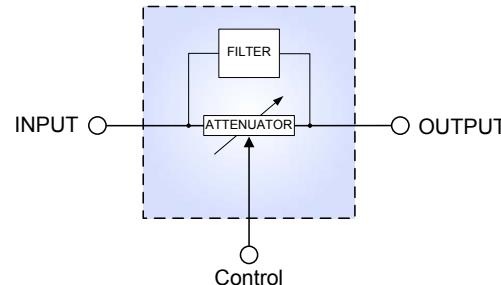

Pad Connections

Function	Pad Number
RF IN	1
RF OUT	6
V CONTROL	3
V+	4
GROUND	2,5

Notes


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

NON-CATALOG

Voltage Variable Equalizer

VAEQ-2150+

Outline Drawing

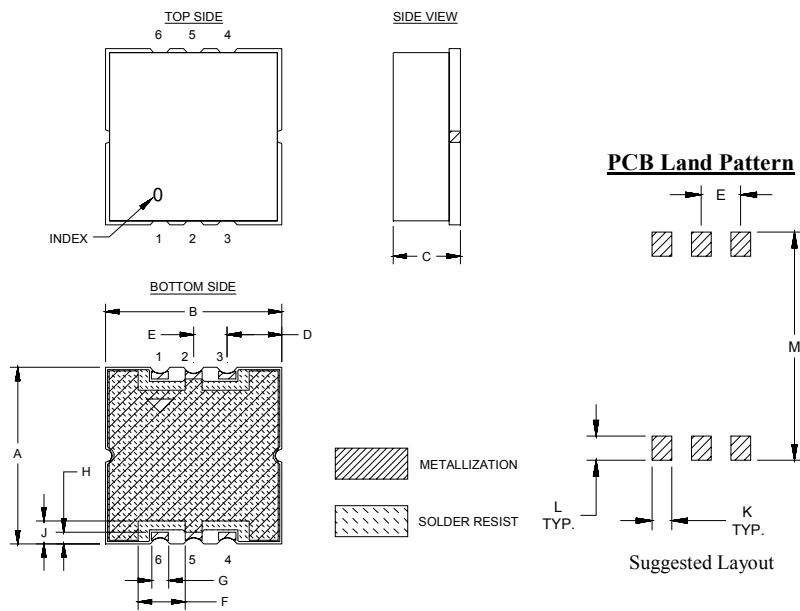


Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H	J	K	L	M	wt.
.394	.394	.150	.122	.075	.098	.038	.038	.026	.051	.038	.046	.434 grams
10.01	10.01	3.81	3.10	1.90	2.49	0.97	0.97	0.66	1.29	0.97	1.17	11.02 0.7

Demo Board MCL P/N: TB-474+

Suggested PCB Layout (PL-285)

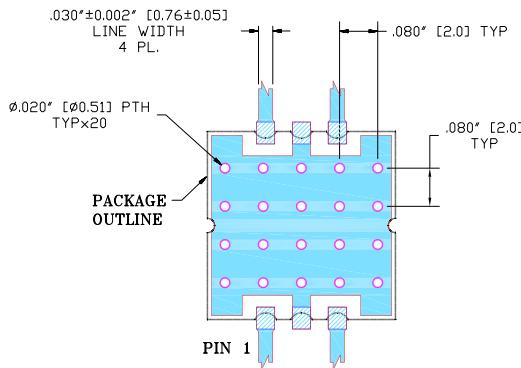

1. TRACE WIDTH IS SHOWN FOR RO4350 WITH DIELECTRIC THICKNESS.
 $.030'' \pm .002''$. COPPER: 1/2 OZ. EACH SIDE.
 FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Pad Connections

Function	Pad Number
RF IN	1
RF OUT	6
V CONTROL	3
V+	4
GROUND	2,5

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



NON-CATALOG

Typical Performance Data @V+=5V

VAEQ-2150+

Frequency (MHz)	Insertion Loss (dB)		Input Return Loss (dB)		Output Return Loss (dB)		Deviation from Linear Loss (dB)		Insertion Phase (deg)		Input IP3 (dBm)	
	Vcontrol 0V 3V		Vcontrol 0V 3V		Vcontrol 0V 3V		Vcontrol 0V 3V		Vcontrol 0V 3V		Vcontrol 0V 3V	
950	12.62	12.48	11.88	12.16	10.12	9.71	0.07	0.04	99.45	101.50	52.07	53.70
1000	12.32	12.19	11.75	12.02	9.84	9.46	0.03	0.01	106.39	108.36	52.97	55.09
1100	11.77	11.67	11.49	11.75	9.35	9.01	0.00	0.00	120.47	122.27	53.01	54.45
1150	11.54	11.45	11.34	11.59	9.11	8.80	0.03	0.03	127.73	129.44	52.89	54.36
1200	11.24	11.15	11.25	11.50	8.91	8.61	0.01	0.00	134.83	136.45	53.30	54.67
1300	10.69	10.62	11.12	11.36	8.56	8.30	0.03	0.02	149.29	150.75	52.53	54.10
1400	10.16	10.10	11.09	11.32	8.27	8.05	0.03	0.02	164.14	165.46	53.03	53.97
1450	9.95	9.89	11.09	11.32	8.16	7.95	0.01	0.02	172.15	173.41	53.43	53.73
1500	9.61	9.56	11.11	11.35	8.05	7.86	0.05	0.04	179.45	179.37	53.53	53.75
1600	9.10	9.06	11.25	11.48	7.85	7.69	0.05	0.04	164.93	163.87	54.64	53.00
1650	8.86	8.81	11.31	11.54	7.75	7.61	0.03	0.02	156.52	155.51	53.98	52.86
1700	8.56	8.52	11.41	11.64	7.70	7.57	0.06	0.06	148.88	147.93	53.85	52.55
1800	8.07	8.04	11.62	11.85	7.56	7.46	0.02	0.02	132.30	131.47	52.01	52.45
1850	7.79	7.76	11.66	11.88	7.41	7.33	0.05	0.05	123.50	122.73	52.18	52.66
1900	7.56	7.53	11.87	12.10	7.45	7.38	0.02	0.02	115.47	114.75	52.23	52.39
2000	7.10	7.08	11.79	12.00	7.27	7.23	0.05	0.04	97.57	96.98	52.69	53.29
2050	6.79	6.77	11.65	11.84	7.14	7.11	0.01	0.01	88.87	88.36	52.99	53.64
2100	6.64	6.62	11.45	11.64	7.20	7.18	0.09	0.08	79.63	79.18	53.30	54.03
2150	6.29	6.28	11.04	11.20	7.04	7.04	0.02	0.01	70.46	70.09	53.60	54.33

Frequency (MHz)	Insertion Loss (dB)		Input Return Loss (dB)		Output Return Loss (dB)		Deviation from Linear Loss (dB)		Insertion Phase (deg)		Input IP3 (dBm)	
	Vcontrol 4.4V 5V		Vcontrol 4.4V 5V		Vcontrol 4.4V 5V		Vcontrol 4.4V 5V		Vcontrol 4.4V 5V		Vcontrol 4V 5V	
950	7.60	6.62	30.06	26.56	16.59	17.49	0.05	0.05	135.26	138.73	52.81	55.71
1000	7.58	6.61	31.24	28.17	16.44	17.58	0.03	0.03	142.52	146.20	53.31	59.05
1100	7.55	6.62	31.47	32.71	16.08	17.65	0.01	0.01	156.98	161.05	53.33	58.83
1150	7.55	6.64	30.24	35.93	15.86	17.59	0.02	0.02	164.23	168.48	53.23	57.74
1200	7.52	6.64	29.39	39.94	15.70	17.61	0.01	0.02	171.50	175.96	53.13	56.15
1300	7.49	6.67	27.32	34.81	15.39	17.57	0.03	0.03	174.07	169.22	52.93	54.46
1400	7.48	6.72	25.79	29.89	15.09	17.46	0.04	0.04	159.47	154.26	53.32	53.63
1450	7.49	6.76	25.17	28.53	14.91	17.34	0.02	0.02	151.98	146.66	54.53	54.75
1500	7.45	6.76	24.43	26.70	14.79	17.27	0.06	0.15	144.83	139.31	56.06	55.26
1600	7.45	6.86	23.70	24.95	14.46	16.91	0.04	0.04	130.14	124.33	58.16	58.10
1650	7.46	6.91	23.40	24.46	14.22	16.63	0.04	0.15	122.60	116.71	56.74	57.45
1700	7.45	6.95	22.96	23.58	14.07	16.44	0.04	0.04	115.57	109.52	54.32	57.14
1800	7.48	7.10	22.80	23.18	13.56	15.73	0.00	0.10	100.90	94.67	52.48	55.51
1850	7.47	7.16	22.56	23.14	13.23	15.27	0.00	0.00	93.47	87.23	52.58	55.23
1900	7.52	7.29	22.57	22.95	12.96	14.87	0.05	0.05	86.73	80.42	52.59	54.41
2000	7.54	7.48	21.73	23.09	12.12	13.71	0.08	0.08	72.29	66.13	52.87	54.38
2050	7.50	7.55	20.77	22.58	11.66	13.08	0.04	0.04	65.76	59.83	53.37	54.48
2100	7.53	7.68	19.56	21.47	11.28	12.54	0.08	0.22	59.03	53.49	53.91	55.13
2150	7.38	7.66	17.70	19.42	10.66	11.70	0.07	0.07	52.70	47.81	54.38	54.67

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



NON-CATALOG

Typical Performance Data @V+=3V

VAEQ-2150+

Frequency (MHz)	Insertion Loss (dB)		Input Return Loss (dB)		Output Return Loss (dB)		Deviation from Linear Loss (dB)		Insertion Phase (deg)		Input IP3 (dBm)	
	Vcontrol 0V 2V		Vcontrol 0V 2V		Vcontrol 0V 2V		Vcontrol 0V 2V		Vcontrol 0V 2V		Vcontrol 0V 2V	
	Vcontrol 0V	Vcontrol 2V	Vcontrol 0V	Vcontrol 2V	Vcontrol 0V	Vcontrol 2V	Vcontrol 0V	Vcontrol 2V	Vcontrol 0V	Vcontrol 2V	Vcontrol 0V	Vcontrol 2V
950	12.58	12.29	10.51	10.93	9.46	8.64	0.02	0.04	99.74	103.77	51.59	52.13
1000	12.28	12.02	10.43	10.84	9.22	8.45	0.00	0.05	106.56	110.40	52.74	53.65
1100	11.74	11.53	10.24	10.64	8.79	8.10	0.01	0.02	120.39	123.88	52.25	53.62
1150	11.51	11.32	10.12	10.51	8.59	7.94	0.04	0.03	127.53	130.90	52.13	53.44
1200	11.20	11.03	10.06	10.44	8.40	7.78	0.00	0.00	134.48	137.67	52.14	53.53
1300	10.64	10.50	9.96	10.34	8.09	7.55	0.01	0.00	148.71	151.58	51.78	52.90
1400	10.10	9.97	9.95	10.32	7.85	7.37	0.02	0.01	163.38	165.96	52.31	53.31
1450	9.87	9.76	9.97	10.33	7.75	7.31	0.03	0.05	171.32	173.79	52.65	53.22
1500	9.52	9.42	10.00	10.37	7.67	7.26	0.05	0.02	178.53	179.15	52.97	53.43
1600	8.99	8.89	10.15	10.52	7.52	7.17	0.04	0.02	165.97	163.88	53.68	52.96
1650	8.73	8.64	10.21	10.58	7.45	7.12	0.02	0.01	157.63	155.65	53.26	52.65
1700	8.43	8.35	10.31	10.67	7.43	7.13	0.06	0.04	150.01	148.16	52.66	52.20
1800	7.91	7.84	10.56	10.92	7.38	7.15	0.03	0.02	133.49	131.85	51.99	51.70
1850	7.62	7.55	10.64	11.00	7.17	6.97	0.05	0.05	124.74	123.21	52.10	52.01
1900	7.37	7.30	10.87	11.23	7.35	7.17	0.03	0.03	116.64	115.24	51.90	51.90
2000	6.88	6.82	10.94	11.29	7.23	7.10	0.03	0.02	98.74	97.57	52.43	52.94
2050	6.57	6.51	10.87	11.20	6.99	6.90	0.02	0.03	89.89	88.85	52.75	53.21
2100	6.41	6.35	10.84	11.16	7.19	7.12	0.10	0.07	80.64	79.72	53.45	53.73
2150	6.06	6.00	10.56	10.86	6.99	6.95	0.02	0.01	71.41	70.65	53.39	53.74

Frequency (MHz)	Insertion Loss (dB)		Input Return Loss (dB)		Output Return Loss (dB)		Deviation from Linear Loss (dB)		Insertion Phase (deg)		Input IP3 (dBm)	
	Vcontrol 3V 5V		Vcontrol 3V 5V		Vcontrol 3V 5V		Vcontrol 3V 5V		Vcontrol 3V 5V		Vcontrol 3V 5V	
	Vcontrol 3V	Vcontrol 5V	Vcontrol 3V	Vcontrol 5V	Vcontrol 3V	Vcontrol 5V	Vcontrol 3V	Vcontrol 5V	Vcontrol 3V	Vcontrol 5V	Vcontrol 3V	Vcontrol 5V
950	7.87	3.18	20.26	17.32	13.59	12.97	0.20	0.20	134.78	149.07	52.20	53.03
1000	7.85	3.23	20.01	17.57	13.35	12.85	0.17	0.15	141.80	156.72	52.99	54.16
1100	7.85	3.38	19.40	17.83	12.89	12.63	0.09	0.08	155.78	172.04	52.90	53.79
1150	7.86	3.48	19.01	17.87	12.65	12.54	0.04	0.07	162.80	179.75	52.77	53.44
1200	7.83	3.53	18.72	17.91	12.45	12.42	0.03	0.01	169.73	172.73	52.82	53.31
1300	7.79	3.70	18.21	17.93	12.15	12.28	0.02	0.04	176.43	157.61	52.39	52.40
1400	7.75	3.87	17.87	17.72	11.91	12.16	0.06	0.09	162.43	142.41	52.76	52.21
1450	7.75	3.99	17.73	17.57	11.80	12.10	0.10	0.09	155.13	134.50	54.24	53.22
1500	7.67	4.06	17.56	17.24	11.73	12.03	0.06	0.13	148.37	127.26	55.39	53.26
1600	7.62	4.28	17.44	16.63	11.56	11.89	0.10	0.14	134.21	112.05	58.68	56.24
1650	7.59	4.40	17.37	16.32	11.44	11.75	0.11	0.14	126.89	104.26	57.15	55.91
1700	7.53	4.54	17.27	15.83	11.42	11.71	0.09	0.13	120.13	97.06	53.83	60.73
1800	7.46	4.85	17.26	15.06	11.27	11.48	0.11	0.08	105.91	82.15	52.55	54.92
1850	7.39	4.98	17.18	14.71	10.89	11.12	0.08	0.08	98.67	74.74	52.55	54.40
1900	7.35	5.23	17.24	14.30	11.05	11.17	0.08	0.01	92.07	67.84	52.13	53.61
2000	7.21	5.62	16.86	13.43	10.57	10.54	0.02	0.10	77.75	53.96	52.53	52.85
2050	7.07	5.83	16.41	13.00	10.07	10.11	0.07	0.13	70.98	47.99	53.04	52.83
2100	7.01	6.10	15.93	12.44	10.07	9.87	0.09	0.21	64.01	41.98	53.72	54.18
2150	6.76	6.22	14.98	11.74	9.57	9.40	0.30	0.13	57.28	37.41	54.05	52.78

Notes







- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



NON-CATALOG

Typical Performance Curves @V+=5V

VAEQ-2150+

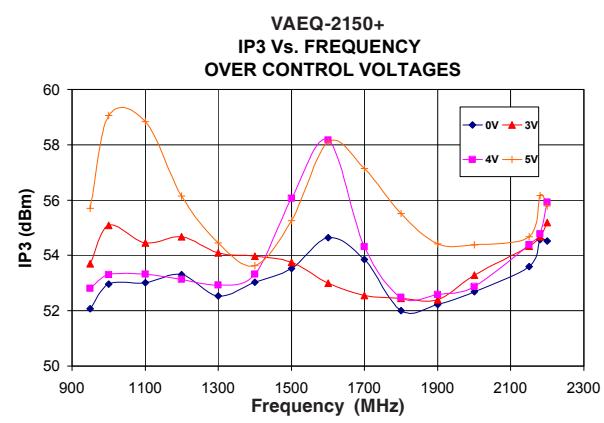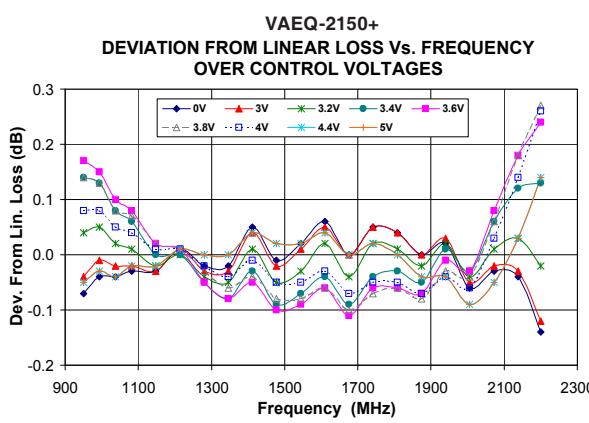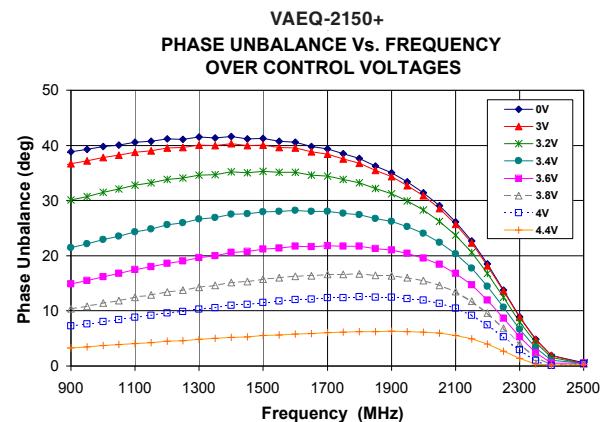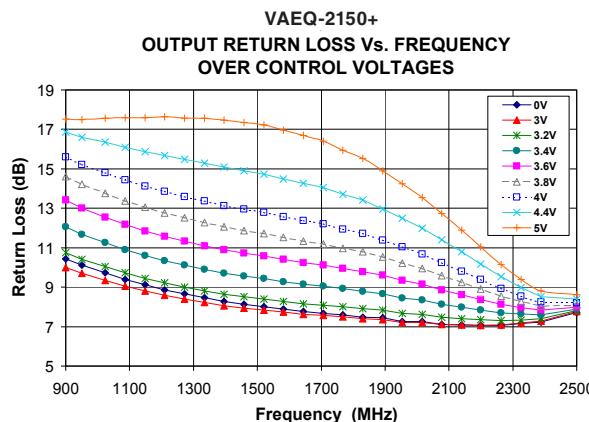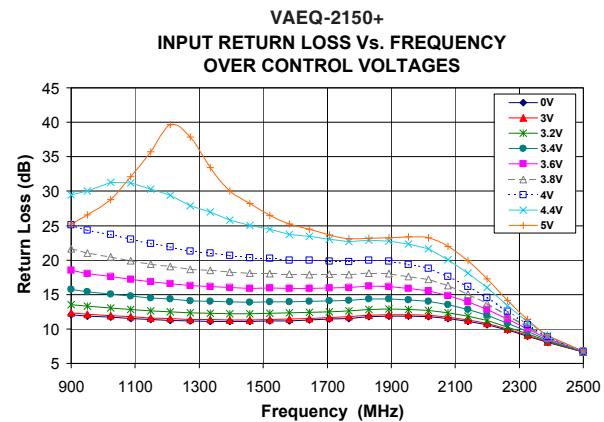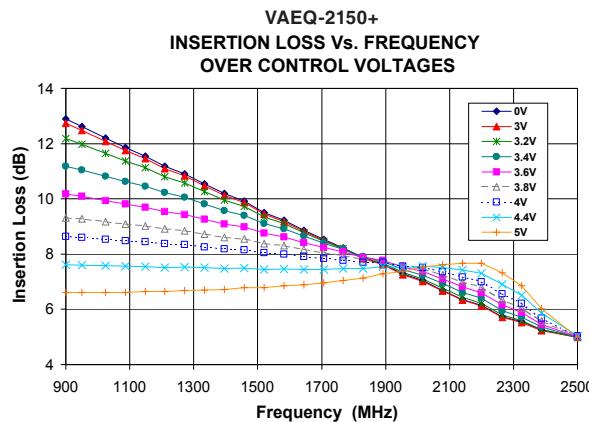

Notes







- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



NON-CATALOG

Typical Performance Curves @V+=3V

VAEQ-2150+

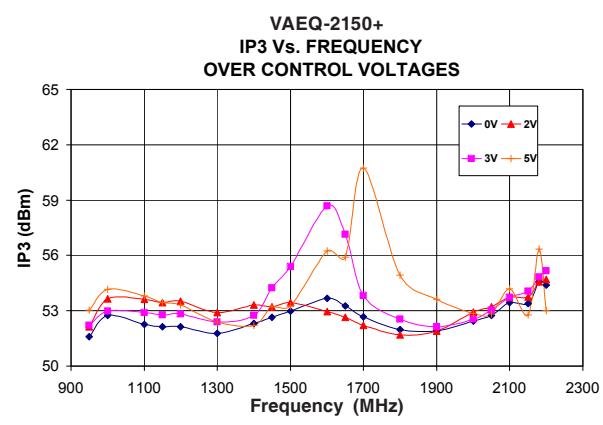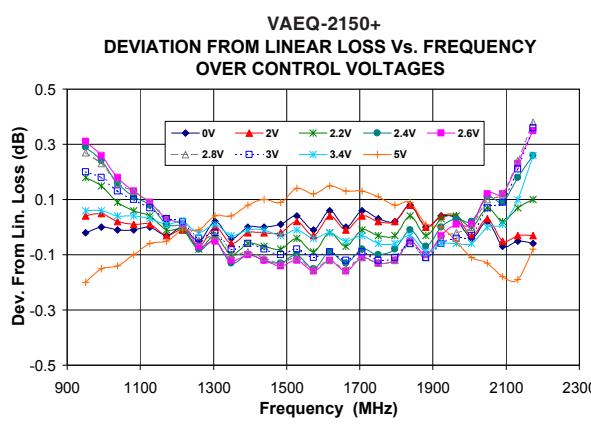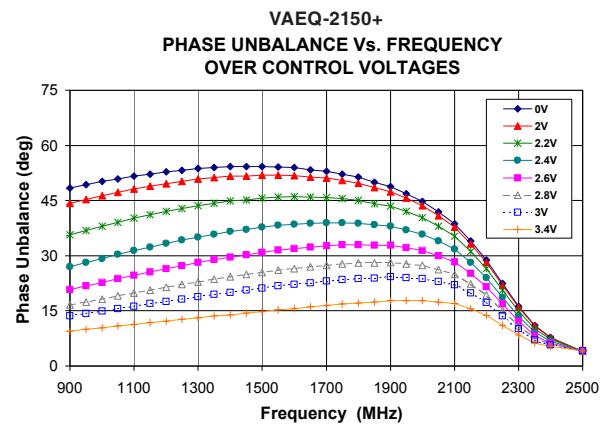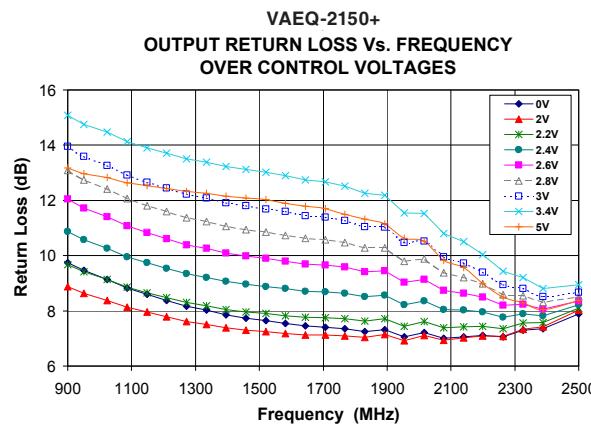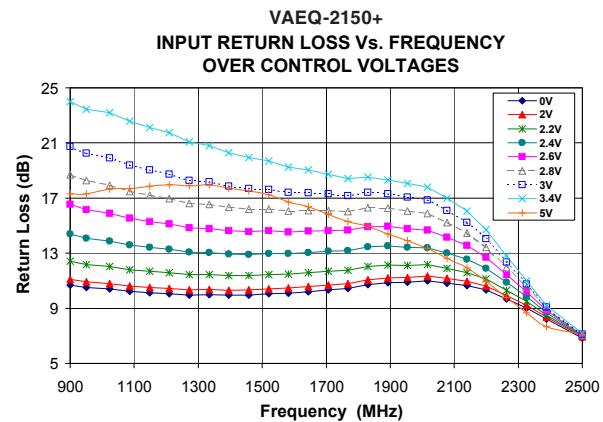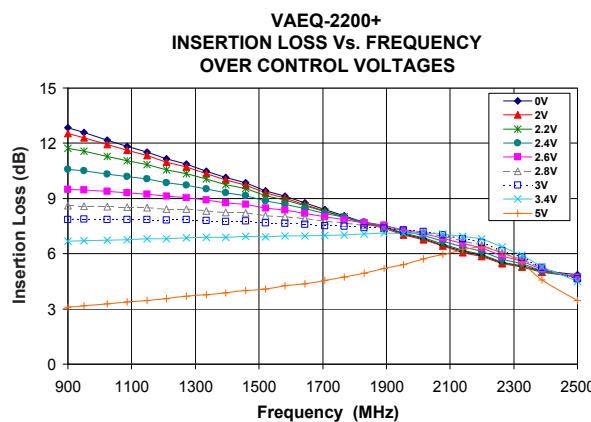

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Voltage Variable Equalizer, 50Ω

VAEQ-2150+

Typical Performance Data @ V+=5V

Frequency (MHz)	Insertion Loss (dB) Vcontrol 0V 3V		Input Return Loss (dB) Vcontrol 0V 3V		Output Return Loss (dB) Vcontrol 0V 3V		Deviation from Linear (dB) Vcontrol 0V 3V		Insertion Phase (deg) Vcontrol 0V 3V		Frequency (MHz)	Input IP3 (dBm) Vcontrol 0V 3V	
	12.89	12.73	12.09	12.37	10.44	10.01	-	-	-92.49	-94.63	950	52.07	53.70
900	12.89	12.73	12.09	12.37	10.44	10.01	-	-	-95.30	-97.42	1000	52.97	55.09
920	12.77	12.62	12.01	12.29	10.32	9.91	-	-	-99.45	-101.50	1100	53.01	54.45
950	12.62	12.48	11.88	12.16	10.12	9.71	-0.07	-0.04	-102.13	-104.15	1200	53.30	54.67
970	12.50	12.37	11.83	12.10	10.01	9.60	-0.05	-0.03	-104.97	-106.95	1300	52.53	54.10
990	12.38	12.25	11.77	12.04	9.89	9.50	-0.04	-0.02	-107.84	-109.79	1400	53.03	53.97
1010	12.27	12.14	11.73	12.00	9.79	9.41	-0.03	-0.01	-110.69	-112.60	1500	53.53	53.75
1030	12.17	12.05	11.67	11.94	9.69	9.33	-0.04	-0.02	-113.48	-115.36	1600	54.64	53.00
1050	12.07	11.96	11.57	11.84	9.57	9.21	-0.04	-0.03	-116.19	-118.03	1700	53.85	52.55
1070	11.96	11.85	11.52	11.77	9.47	9.12	-0.04	-0.03	-106.39	-108.36	1800	52.01	52.45
1000	12.32	12.19	11.75	12.02	9.84	9.46	-0.03	-0.01	-109.29	-111.22	1900	52.23	52.39
1020	12.22	12.09	11.71	11.97	9.73	9.37	-0.03	-0.01	-112.06	-113.96	2000	52.69	53.29
1040	12.12	12.00	11.62	11.89	9.63	9.27	-0.04	-0.02	-114.84	-116.70	2100	53.30	54.03
1060	12.02	11.91	11.54	11.80	9.52	9.16	-0.05	-0.03	-109.47	-112.27	2150	53.60	54.33
1100	11.77	11.67	11.49	11.75	9.35	9.01	0.00	0.00	-120.47	-122.27			
1120	11.66	11.56	11.43	11.69	9.26	8.94	0.00	0.00	-123.51	-125.26			
1140	11.58	11.49	11.38	11.63	9.16	8.85	-0.02	-0.02	-126.38	-128.11			
1160	11.49	11.40	11.31	11.56	9.07	8.77	-0.03	-0.04	-129.06	-130.75			
1180	11.36	11.27	11.27	11.51	8.99	8.69	-0.01	-0.01	-131.86	-133.51			
1200	11.24	11.15	11.25	11.50	8.91	8.61	0.01	0.00	-134.83	-136.45			
1220	11.13	11.05	11.24	11.50	8.84	8.56	0.00	0.00	-137.90	-139.50			
1250	11.01	10.93	11.16	11.41	8.73	8.46	-0.03	-0.04	-142.29	-143.85			
1300	10.69	10.62	11.12	11.36	8.56	8.30	0.03	0.02	-149.29	-150.75			
1350	10.49	10.42	11.12	11.36	8.41	8.18	-0.03	-0.04	-156.99	-158.39			
1450	9.95	9.89	11.09	11.32	8.16	7.95	-0.01	-0.02	-172.15	-173.41			
1500	9.61	9.56	11.11	11.35	8.05	7.86	0.05	0.04	-179.45	-179.37			
1550	9.40	9.35	11.24	11.47	7.96	7.79	0.01	0.00	-172.58	-171.45			
1600	9.10	9.06	11.25	11.48	7.85	7.69	0.05	0.04	-164.93	-163.87			
1620	8.97	8.92	11.34	11.58	7.82	7.68	0.08	0.08	-161.70	-160.66			
1640	8.88	8.84	11.29	11.53	7.77	7.63	0.06	0.05	-158.11	-157.09			
1660	8.82	8.78	11.32	11.55	7.74	7.60	0.02	0.01	-155.00	-154.01			
1680	8.73	8.69	11.41	11.64	7.73	7.59	0.01	0.00	-152.09	-151.12			
1700	8.56	8.52	11.41	11.64	7.70	7.57	0.06	0.06	-148.88	-147.93			
1720	8.45	8.41	11.46	11.68	7.64	7.52	0.07	0.07	-145.44	-144.52			
1750	8.33	8.29	11.55	11.77	7.60	7.49	0.04	0.03	-140.38	-139.48			
1800	8.07	8.04	11.62	11.85	7.56	7.46	0.03	0.03	-132.30	-131.47			
1850	7.79	7.76	11.66	11.88	7.41	7.33	0.05	0.05	-123.50	-122.73			
1900	7.56	7.53	11.87	12.10	7.45	7.38	0.02	0.02	-115.47	-114.75			
1950	7.31	7.28	11.81	12.03	7.26	7.22	0.02	0.02	-106.48	-105.82			
2000	7.10	7.08	11.79	12.00	7.27	7.23	-0.05	-0.04	-97.57	-96.98			
2020	7.01	6.99	11.79	12.00	7.24	7.20	-0.06	-0.05	-94.31	-93.74			
2040	6.86	6.84	11.72	11.92	7.17	7.15	-0.01	-0.01	-90.82	-90.29			
2060	6.74	6.72	11.60	11.80	7.12	7.10	0.00	0.01	-86.88	-86.38			
2080	6.69	6.67	11.53	11.72	7.13	7.12	-0.05	-0.04	-83.07	-82.59			
2100	6.64	6.62	11.45	11.64	7.20	7.18	-0.10	-0.09	-79.63	-79.18			
2120	6.52	6.50	11.33	11.51	7.18	7.16	-0.09	-0.08	-76.26	-75.84			
2140	6.36	6.34	11.13	11.30	7.08	7.08	-0.04	-0.03	-72.51	-72.12			
2150	6.29	6.28	11.04	11.20	7.04	7.04	-0.02	-0.01	-70.46	-70.09			
2200	6.15	6.13	10.64	10.79	7.07	7.07	-	-	-60.73	-60.43			
2250	5.82	5.80	10.00	10.12	7.05	7.07	-	-	-51.28	-51.07			
2300	5.65	5.63	9.35	9.46	7.10	7.13	-	-	-40.50	-40.36			
2400	5.25	5.22	7.95	8.02	7.32	7.36	-	-	-18.94	-18.95			
2500	5.01	4.98	6.63	6.67	7.71	7.77	-	-	-5.20	-5.06			

Mini-Circuits®

ISO 9001 IS9 14001 AS 9100 CERTIFIED

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 634-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCI_Store/Terms.jsp.

REV. OR
VAEQ-2150+

130805

Page 1 of 4

Voltage Variable Equalizer, 50Ω

VAEQ-2150+

Typical Performance Data @ V+=5V

Frequency (MHz)	Insertion Loss (dB) Vcontrol		Input Return Loss (dB) Vcontrol		Output Return Loss (dB) Vcontrol		Deviation from Linear (dB) Vcontrol		Insertion Phase (deg) Vcontrol		Frequency (MHz)	Input IP3 (dBm) Vcontrol	
	4.4V	5V	4.4V	5V	4.4V	5V	4.4V	5V	4.4V	5V	4V	5V	
900	7.61	6.61	29.48	25.24	16.86	17.53	-	-	-128.04	-131.33	950	52.81	55.71
920	7.61	6.61	29.65	25.66	16.78	17.53	-	-	-130.94	-134.30	1000	53.31	59.05
950	7.60	6.62	30.06	26.56	16.59	17.49	-0.05	-0.05	-135.26	-138.73	1100	53.33	58.83
970	7.59	6.61	30.67	27.34	16.51	17.52	-0.04	-0.04	-138.11	-141.67	1200	53.13	56.15
990	7.58	6.61	31.06	27.99	16.46	17.55	-0.03	-0.03	-141.05	-144.69	1300	52.93	54.46
1010	7.58	6.61	31.29	28.46	16.41	17.57	-0.03	-0.03	-143.98	-147.69	1400	53.32	53.63
1030	7.58	6.62	31.26	29.03	16.32	17.55	-0.04	-0.04	-146.87	-150.65	1500	56.06	55.26
1050	7.57	6.62	30.95	30.11	16.20	17.53	-0.03	-0.03	-149.71	-153.57	1600	58.16	58.10
1070	7.57	6.62	31.02	31.29	16.13	17.56	-0.02	-0.02	-152.59	-156.54	1700	54.32	57.14
1000	7.58	6.61	31.24	28.17	16.44	17.58	-0.03	-0.03	-142.52	-146.20	1800	52.48	55.51
1020	7.58	6.62	31.39	28.71	16.37	17.57	-0.03	-0.03	-145.44	-149.18	1900	52.59	54.41
1040	7.58	6.62	31.23	29.62	16.26	17.55	-0.03	-0.03	-148.25	-152.08	2000	52.87	54.38
1060	7.57	6.62	30.94	30.69	16.16	17.54	-0.03	-0.03	-151.15	-155.05	2100	53.91	55.13
1100	7.55	6.62	31.47	32.71	16.08	17.65	-0.01	-0.01	-156.98	-161.05	2150	54.38	54.67
1120	7.55	6.63	31.10	33.69	16.03	17.67	-0.01	-0.01	-159.93	-164.06			
1140	7.55	6.64	30.55	34.95	15.91	17.61	-0.02	-0.08	-162.82	-167.02			
1160	7.55	6.64	30.06	36.91	15.82	17.58	-0.02	-0.02	-165.63	-169.93			
1180	7.53	6.64	29.56	39.38	15.75	17.60	0.00	0.00	-168.51	-172.90			
1200	7.52	6.64	29.39	39.94	15.70	17.61	0.01	-0.02	-171.50	-175.96			
1220	7.53	6.66	29.28	39.70	15.67	17.64	0.00	0.00	-174.48	-179.00			
1250	7.53	6.67	28.38	40.00	15.53	17.59	-0.01	-0.01	-178.80	-176.58			
1300	7.49	6.67	27.32	34.81	15.39	17.57	0.03	0.03	174.07	169.22			
1350	7.52	6.72	26.71	32.54	15.23	17.53	0.00	0.05	166.66	161.67			
1450	7.49	6.76	25.17	28.53	14.91	17.34	0.02	0.02	151.98	146.66			
1500	7.45	6.76	24.43	26.70	14.79	17.27	0.06	0.15	144.83	139.31			
1550	7.48	6.84	24.26	25.89	14.64	17.14	0.02	0.02	137.45	131.80			
1600	7.45	6.86	23.70	24.95	14.46	16.91	0.04	0.04	130.14	124.33			
1620	7.45	6.88	23.68	24.61	14.42	16.90	0.05	0.05	127.26	121.41			
1640	7.44	6.88	23.44	24.52	14.28	16.70	0.05	0.05	124.09	118.23			
1660	7.47	6.93	23.33	24.33	14.17	16.57	0.02	0.02	121.17	115.24			
1680	7.49	6.96	23.26	24.00	14.11	16.49	0.00	0.00	118.39	112.38			
1700	7.45	6.95	22.96	23.58	14.07	16.44	0.04	0.04	115.57	109.52			
1720	7.45	6.97	23.09	23.68	13.98	16.32	0.04	0.04	112.49	106.41			
1750	7.48	7.04	23.12	23.63	13.82	16.10	0.00	0.00	108.03	101.91			
1800	7.48	7.10	22.80	23.18	13.56	15.73	0.00	0.00	100.90	94.67			
1850	7.47	7.16	22.56	23.14	13.23	15.27	0.00	0.00	93.47	87.23			
1900	7.52	7.29	22.57	22.95	12.96	14.87	-0.05	-0.05	86.73	80.42			
1950	7.52	7.36	22.32	23.38	12.52	14.29	-0.05	-0.05	79.34	73.08			
2000	7.54	7.48	21.73	23.09	12.12	13.71	-0.08	-0.08	72.29	66.13			
2020	7.56	7.54	21.61	23.24	11.94	13.48	-0.10	-0.10	69.74	63.62			
2040	7.52	7.55	21.12	22.85	11.76	13.23	-0.06	-0.06	67.20	61.19			
2060	7.50	7.57	20.48	22.32	11.56	12.94	-0.04	-0.04	64.29	58.44			
2080	7.51	7.62	20.01	21.89	11.40	12.72	-0.06	-0.06	61.51	55.80			
2100	7.53	7.68	19.56	21.47	11.28	12.54	-0.07	-0.07	59.03	53.49			
2120	7.49	7.69	18.95	20.84	11.07	12.25	-0.04	-0.04	56.65	51.32			
2140	7.42	7.67	18.11	19.91	10.79	11.89	0.04	0.04	54.09	49.04			
2150	7.38	7.66	17.70	19.42	10.66	11.70	0.07	0.07	52.70	47.81			
2200	7.31	7.67	15.99	17.30	10.18	11.03	-	-	46.20	42.24			
2250	7.02	7.44	13.93	14.80	9.66	10.33	-	-	40.22	37.50			
2300	6.70	7.08	12.01	12.47	9.19	9.67	-	-	32.96	31.57			
2400	5.77	5.90	8.71	8.75	8.53	8.78	-	-	16.82	17.03			
2500	5.03	4.98	6.72	6.78	8.40	8.61	-	-	-4.91	-4.63			

Mini-Circuits®

ISO 9001 IS9001 AS 9100 CERTIFIED

IF/RF MICROWAVE COMPONENTS

For detailed performance specs
& shopping online see web site

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCI_Store/Terms.jsp.

REV. OR

VAEQ-2150+

130805

Page 2 of 4

Voltage Variable Equalizer, 50Ω

VAEQ-2150+

Typical Performance Data @ V+=3V

Frequency (MHz)	Insertion Loss (dB) Vcontrol 0V 2V		Input Return Loss (dB) Vcontrol 0V 2V		Output Return Loss (dB) Vcontrol 0V 2V		Deviation from Linear (dB) Vcontrol 0V 2V		Insertion Phase (deg) Vcontrol 0V 2V		Frequency (MHz)	Input IP3 (dBm) Vcontrol 0V 2V	
	12.84	12.52	10.67	11.10	9.74	8.87	-	-	-92.91	-97.07	950	51.59	52.13
900	12.73	12.42	10.62	11.05	9.66	8.81	-	-	-95.68	-99.79	1000	52.74	53.65
950	12.58	12.29	10.51	10.93	9.46	8.64	-0.02	0.04	-99.74	-103.77	1100	52.25	53.62
970	12.46	12.19	10.46	10.87	9.34	8.54	-0.02	0.04	-102.37	-106.32	1200	52.14	53.53
990	12.34	12.08	10.42	10.84	9.25	8.47	0.00	0.05	-105.16	-109.04	1300	51.78	52.90
1010	12.23	11.97	10.42	10.83	9.19	8.42	0.00	0.05	-107.98	-111.79	1400	52.31	53.31
1030	12.13	11.89	10.38	10.79	9.12	8.37	-0.01	0.02	-110.78	-114.54	1500	52.97	53.43
1050	12.04	11.81	10.28	10.69	8.99	8.26	-0.02	0.00	-113.54	-117.21	1600	53.68	52.96
1070	11.93	11.71	10.24	10.63	8.88	8.17	-0.03	0.00	-116.18	-119.79	1700	52.66	52.20
1000	12.28	12.02	10.43	10.84	9.22	8.45	0.00	0.05	-106.56	-110.40	1800	51.99	51.70
1020	12.18	11.93	10.41	10.82	9.15	8.40	0.00	0.04	-109.41	-113.18	1900	51.90	51.90
1040	12.08	11.84	10.34	10.74	9.05	8.32	-0.01	0.02	-112.14	-115.86	2000	52.43	52.94
1060	11.99	11.76	10.26	10.66	8.93	8.21	-0.03	0.00	-114.86	-118.51	2100	53.45	53.73
1100	11.74	11.53	10.24	10.64	8.79	8.10	0.01	0.02	-120.39	-123.88	2150	53.39	53.74
1120	11.63	11.43	10.21	10.61	8.74	8.06	0.01	0.02	-123.38	-126.84			
1140	11.55	11.36	10.16	10.55	8.65	7.99	-0.02	-0.02	-126.21	-129.60			
1160	11.46	11.27	10.09	10.49	8.54	7.90	-0.04	-0.04	-128.83	-132.16			
1180	11.33	11.15	10.06	10.44	8.45	7.83	-0.02	-0.02	-131.57	-134.80			
1200	11.20	11.03	10.06	10.44	8.40	7.78	0.00	0.00	-134.48	-137.67			
1220	11.09	10.93	10.07	10.45	8.37	7.76	0.00	-0.01	-137.53	-140.66			
1250	10.97	10.81	9.99	10.38	8.25	7.67	-0.04	-0.06	-141.85	-144.89			
1300	10.64	10.50	9.96	10.34	8.09	7.55	0.01	0.00	-148.71	-151.58			
1350	10.43	10.30	9.97	10.34	7.97	7.47	-0.04	-0.07	-156.34	-159.10			
1450	9.87	9.76	9.97	10.33	7.75	7.31	-0.03	-0.05	-171.32	-173.79			
1500	9.52	9.42	10.00	10.37	7.67	7.26	0.05	0.02	-178.53	-179.15			
1550	9.30	9.20	10.12	10.49	7.60	7.22	0.00	-0.03	173.56	171.34			
1600	8.99	8.89	10.15	10.52	7.52	7.17	0.04	0.02	165.97	163.88			
1620	8.85	8.76	10.24	10.61	7.50	7.16	0.07	0.05	162.76	160.72			
1640	8.76	8.67	10.20	10.57	7.46	7.13	0.05	0.03	159.20	157.20			
1660	8.69	8.61	10.22	10.58	7.44	7.12	0.01	-0.01	156.11	154.16			
1680	8.60	8.51	10.29	10.65	7.45	7.15	0.00	-0.02	153.21	151.29			
1700	8.43	8.35	10.31	10.67	7.43	7.13	0.06	0.04	150.01	148.16			
1720	8.31	8.23	10.38	10.73	7.37	7.09	0.07	0.05	146.60	144.79			
1750	8.18	8.10	10.45	10.82	7.33	7.07	0.03	0.02	141.54	139.79			
1800	7.91	7.84	10.56	10.92	7.38	7.15	0.03	0.02	133.49	131.85			
1850	7.62	7.55	10.64	11.00	7.17	6.97	0.05	0.05	124.74	123.21			
1900	7.37	7.30	10.87	11.23	7.35	7.17	0.03	0.03	116.64	115.24			
1950	7.10	7.03	10.87	11.22	7.06	6.91	0.03	0.03	107.67	106.38			
2000	6.88	6.82	10.94	11.29	7.23	7.10	-0.03	-0.02	98.74	97.57			
2020	6.78	6.73	10.98	11.33	7.20	7.09	-0.04	-0.03	95.42	94.30			
2040	6.63	6.57	10.93	11.26	7.06	6.96	0.01	0.02	91.83	90.78			
2060	6.52	6.46	10.84	11.17	6.96	6.88	0.01	0.03	87.92	86.91			
2080	6.46	6.40	10.83	11.15	7.03	6.95	-0.04	-0.02	84.08	83.12			
2100	6.41	6.35	10.84	11.16	7.19	7.12	-0.10	-0.07	80.64	79.72			
2120	6.29	6.23	10.80	11.11	7.20	7.14	-0.08	-0.06	77.25	76.40			
2140	6.13	6.07	10.64	10.95	7.06	7.02	-0.03	-0.01	73.48	72.68			
2150	6.06	6.00	10.56	10.86	6.99	6.95	-0.02	0.01	71.41	70.65			
2200	5.91	5.85	10.33	10.60	7.11	7.09	-	-	61.57	60.93			
2250	5.59	5.54	9.82	10.06	7.07	7.07	-	-	52.06	51.57			
2300	5.43	5.37	9.34	9.55	7.21	7.23	-	-	41.27	40.93			
2400	5.06	4.98	8.11	8.25	7.48	7.55	-	-	19.65	19.59			
2500	4.85	4.75	6.85	6.95	7.89	8.02	-	-	-4.33	-4.16			

Mini-Circuits®

ISO 9001 IS9 14001 AS 9100 CERTIFIED

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 634-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCI_Store/Terms.jsp.

REV. OR
VAEQ-2150+

130805

Page 3 of 4

Voltage Variable Equalizer, 50Ω

VAEQ-2150+

Typical Performance Data @ V+=3V

Frequency (MHz)	Insertion Loss (dB) Vcontrol		Input Return Loss (dB) Vcontrol		Output Return Loss (dB) Vcontrol		Deviation from Linear (dB) Vcontrol		Insertion Phase (deg) Vcontrol		Frequency (MHz)	Input IP3 (dBm) Vcontrol	
	3V	5V	3V	5V	3V	5V	3V	5V	3V	5V		3V	5V
900	7.85	3.10	20.75	17.32	13.95	13.17	-	-	-127.74	-141.33	950	52.20	53.03
920	7.86	3.13	20.59	17.37	13.84	13.13	-	-	-130.57	-144.44	1000	52.99	54.16
950	7.87	3.18	20.26	17.32	13.59	12.97	0.20	-0.20	-134.78	-149.07	1100	52.90	53.79
970	7.86	3.20	20.11	17.37	13.46	12.89	0.19	-0.18	-137.53	-152.09	1200	52.82	53.31
990	7.85	3.22	20.01	17.48	13.38	12.85	0.18	-0.16	-140.37	-155.16	1300	52.39	52.40
1010	7.85	3.25	20.00	17.62	13.33	12.85	0.17	-0.14	-143.23	-158.29	1400	52.76	52.21
1030	7.87	3.29	19.86	17.68	13.23	12.83	0.14	-0.14	-146.06	-161.42	1500	55.39	53.26
1050	7.87	3.32	19.58	17.60	13.07	12.73	0.12	-0.13	-148.81	-164.42	1600	58.68	56.24
1070	7.87	3.35	19.40	17.61	12.96	12.65	0.10	-0.11	-151.54	-167.42	1700	53.83	60.73
1000	7.85	3.23	20.01	17.57	13.35	12.85	0.17	-0.15	-141.80	-156.72	1800	52.55	54.92
1020	7.86	3.26	19.95	17.67	13.29	12.84	0.15	-0.14	-144.66	-159.86	1900	52.13	53.61
1040	7.87	3.31	19.72	17.65	13.15	12.78	0.13	-0.13	-147.40	-162.91	2000	52.53	52.85
1060	7.87	3.34	19.48	17.60	13.01	12.68	0.11	-0.12	-150.18	-165.92	2100	53.72	54.18
1100	7.85	3.38	19.40	17.83	12.89	12.63	0.09	-0.08	-155.78	-172.04	2150	54.05	52.78
1120	7.85	3.41	19.31	17.92	12.83	12.63	0.08	-0.06	-158.66	-175.17			
1140	7.86	3.45	19.14	17.91	12.72	12.58	0.05	-0.07	-161.47	-178.26			
1160	7.87	3.50	18.91	17.85	12.59	12.49	0.03	-0.06	-164.13	-178.78			
1180	7.84	3.52	18.74	17.83	12.51	12.44	0.03	-0.04	-166.86	-175.83			
1200	7.83	3.53	18.72	17.91	12.45	12.42	0.03	-0.01	-169.73	-172.73			
1220	7.83	3.57	18.71	18.01	12.43	12.43	0.01	0.00	-172.66	-169.53			
1250	7.84	3.64	18.45	17.93	12.30	12.37	-0.03	-0.01	-176.82	-164.95			
1300	7.79	3.70	18.21	17.93	12.15	12.28	-0.02	0.04	176.43	157.61			
1350	7.81	3.81	18.09	17.90	12.03	12.23	-0.08	0.03	169.22	149.71			
1450	7.75	3.99	17.73	17.57	11.80	12.10	-0.10	0.09	155.13	134.50			
1500	7.67	4.06	17.56	17.24	11.73	12.03	-0.06	0.13	148.37	127.26			
1550	7.68	4.19	17.61	17.11	11.65	11.99	-0.12	0.11	141.17	119.38			
1600	7.62	4.28	17.44	16.63	11.56	11.89	-0.10	0.14	134.21	112.05			
1620	7.59	4.32	17.54	16.58	11.53	11.88	-0.09	0.15	131.41	109.00			
1640	7.58	4.36	17.39	16.41	11.45	11.79	-0.09	0.16	128.31	105.82			
1660	7.59	4.44	17.33	16.21	11.44	11.72	-0.12	0.13	125.50	102.76			
1680	7.59	4.51	17.34	16.04	11.45	11.72	-0.14	0.11	122.85	99.86			
1700	7.53	4.54	17.27	15.83	11.42	11.71	-0.09	0.13	120.13	97.06			
1720	7.51	4.58	17.33	15.77	11.32	11.66	-0.09	0.14	117.16	93.97			
1750	7.51	4.68	17.36	15.58	11.24	11.53	-0.12	0.11	112.81	89.33			
1800	7.46	4.85	17.26	15.06	11.27	11.48	-0.11	0.08	105.91	82.15			
1850	7.39	4.98	17.18	14.71	10.89	11.12	-0.08	0.08	98.67	74.74			
1900	7.35	5.23	17.24	14.30	11.05	11.17	-0.08	-0.01	92.07	67.84			
1950	7.27	5.38	17.08	13.95	10.50	10.66	-0.04	-0.02	84.78	60.77			
2000	7.21	5.62	16.86	13.43	10.57	10.54	-0.02	-0.10	77.75	53.96			
2020	7.18	5.73	16.82	13.35	10.48	10.50	-0.02	-0.14	75.15	51.52			
2040	7.10	5.80	16.59	13.14	10.21	10.27	0.05	-0.14	72.46	49.25			
2060	7.04	5.86	16.27	12.85	9.97	9.97	0.09	-0.12	69.49	46.69			
2080	7.02	5.97	16.06	12.59	9.95	9.83	0.10	-0.16	66.59	44.14			
2100	7.01	6.10	15.93	12.44	10.07	9.87	0.09	-0.21	64.01	41.98			
2120	6.93	6.19	15.68	12.23	10.01	9.82	0.15	-0.21	61.52	40.18			
2140	6.82	6.22	15.23	11.93	9.73	9.57	0.25	-0.16	58.80	38.41			
2150	6.76	6.22	14.98	11.74	9.57	9.40	0.30	-0.13	57.28	37.41			
2200	6.61	6.34	14.03	10.95	9.40	8.98	-	-	50.05	32.75			
2250	6.28	6.18	12.72	10.06	9.05	8.66	-	-	43.23	29.61			
2300	5.98	5.77	11.42	9.08	8.86	8.29	-	-	35.09	25.02			
2400	5.20	4.45	8.88	7.61	8.59	8.13	-	-	17.59	11.92			
2500	4.64	3.47	7.10	7.13	8.67	8.38	-	-	-4.05	-8.16			

Mini-Circuits®

ISO 9001 IS9 14001 AS 9100 CERTIFIED

IF/RF MICROWAVE COMPONENTS

For detailed performance specs
& shopping online see web site

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 634-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCI_Store/Terms.jsp.

REV. OR

VAEQ-2150+







130805

Page 4 of 4

Voltage Variable Equalizer, 50Ω

VAEQ-2150+

Typical Performance Curves @ V+=5V

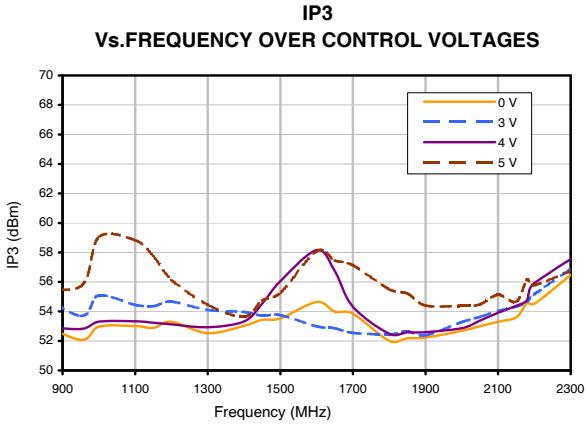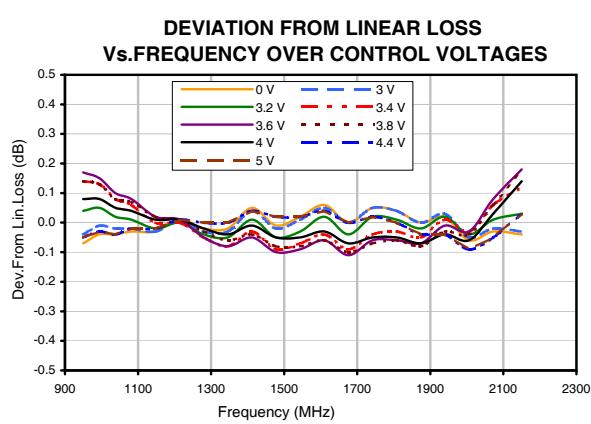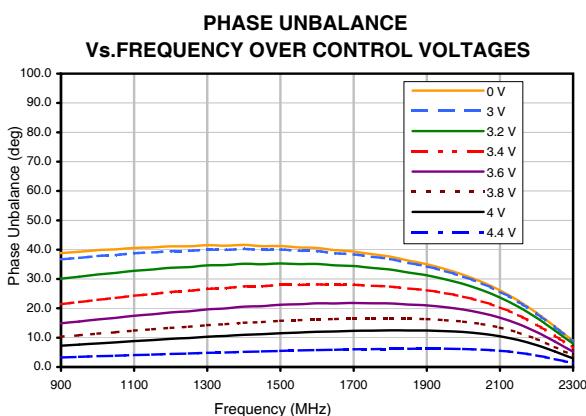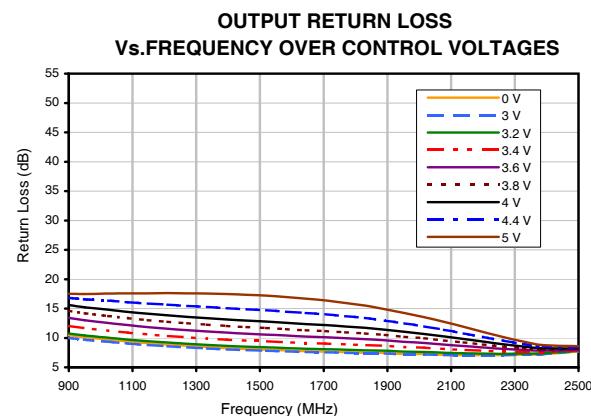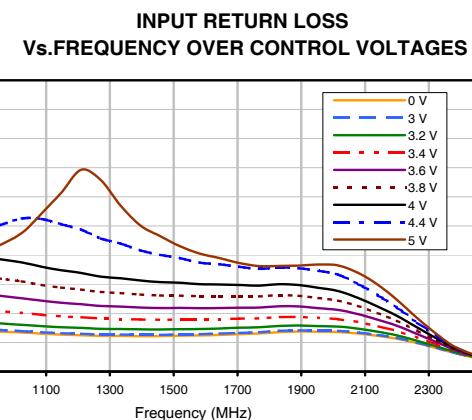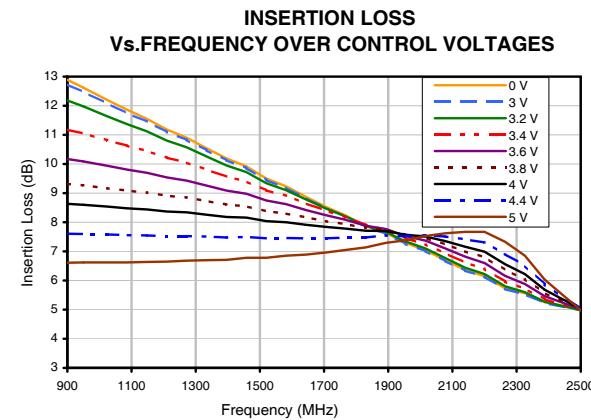

Mini-Circuits®
ISO 9001 IS9001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 634-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

For detailed performance specs & shopping online see web site







Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCI_Store/Terms.jsp.

REV. OR
VAEQ-2150+
130805
Page 1 of 2

Voltage Variable Equalizer, 50Ω

VAEQ-2150+

Typical Performance Curves @ V+=3V

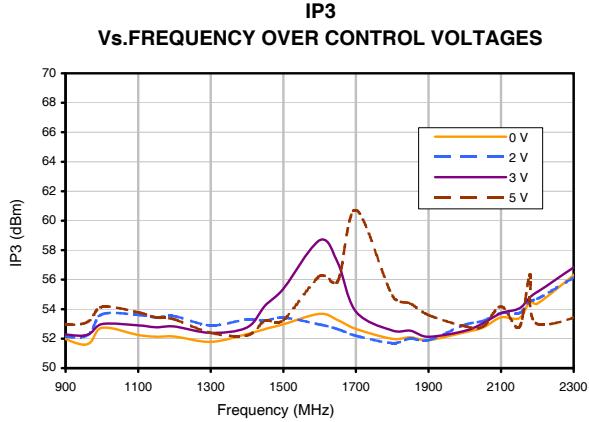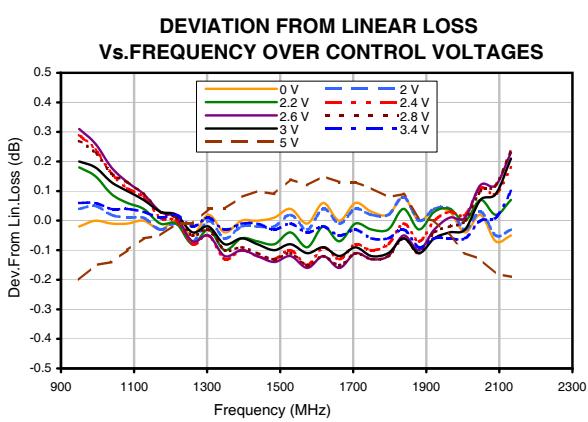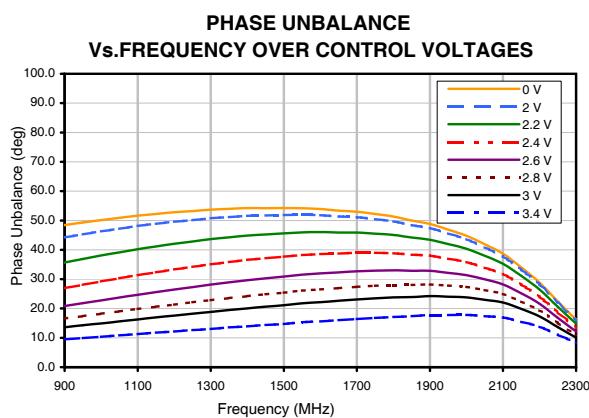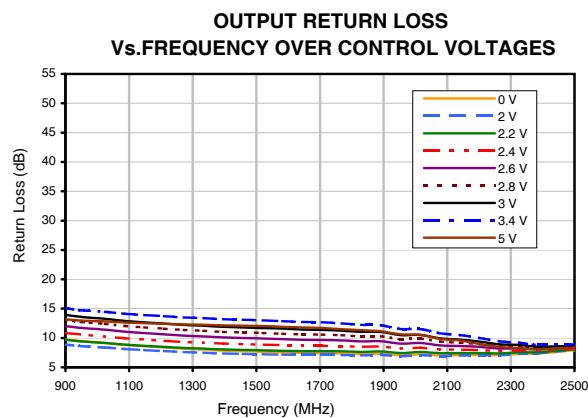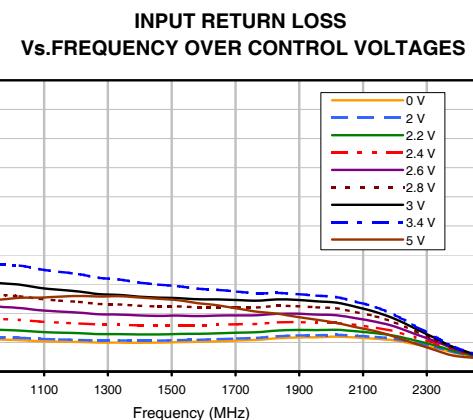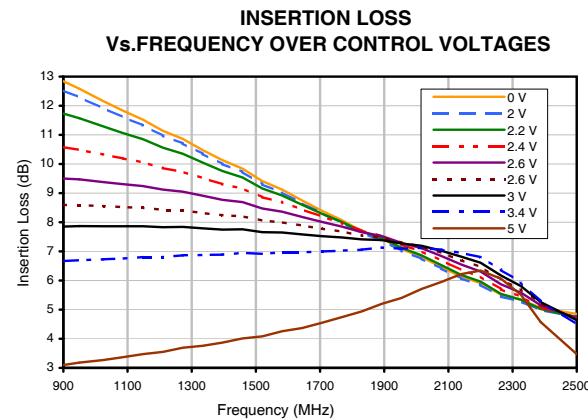


Case Style


HE

HE1354

Outline Dimensions

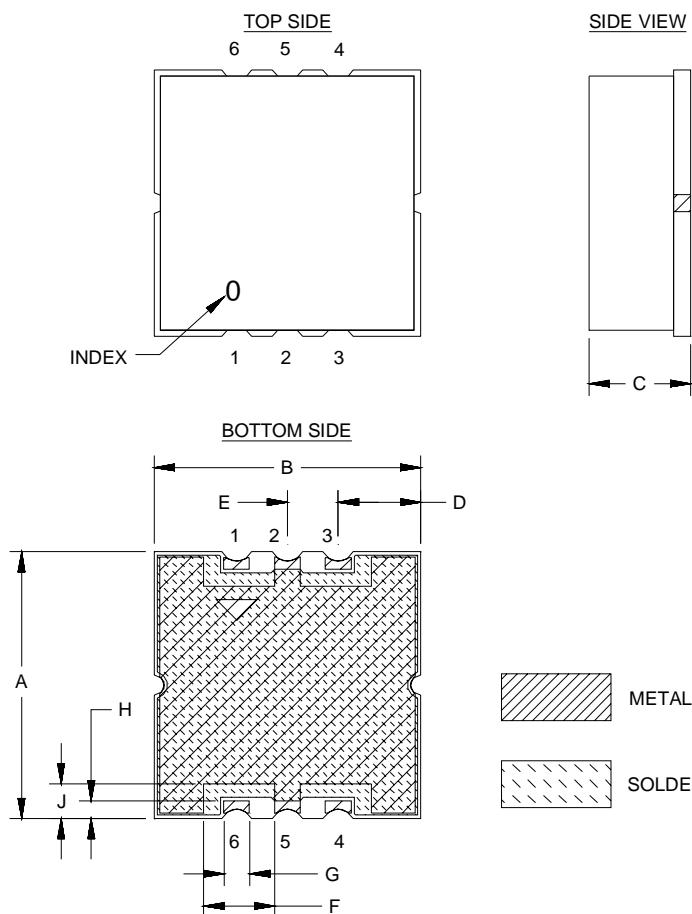

PCB Land Pattern

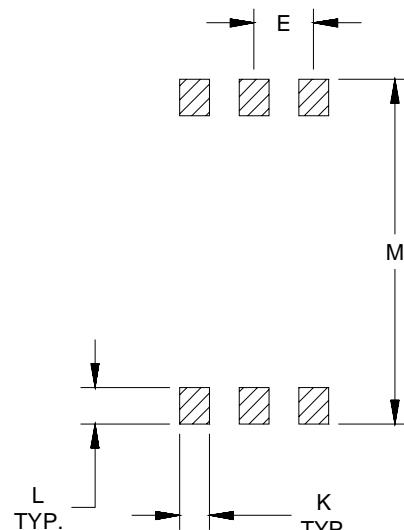

CASE #	A	B	C	D	E	F	G	H	J	K	L	M	WT. GRAMS
HE1354	.394 (10.01)	.394 (10.01)	.150 (3.81)	.122 (3.10)	.075 (1.90)	.098 (2.49)	.038 (0.97)	.026 (0.66)	.051 (1.29)	.038 (0.97)	.046 (1.17)	.434 (11.02)	0.7

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

1. Case material: Nickel-Silver alloy.
2. Base: Printed wiring laminate.
3. Termination finish:

For RoHS Case Styles: 3-5 μ inch (.08-.13 microns) Gold over 120-240 μ inch (3.05-6.10 microns) Nickel plate.
For RoHS-5 Case Styles: Tin-Lead plate.




P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/I/F MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F37

DEVICE ORIENTATION IN T&R

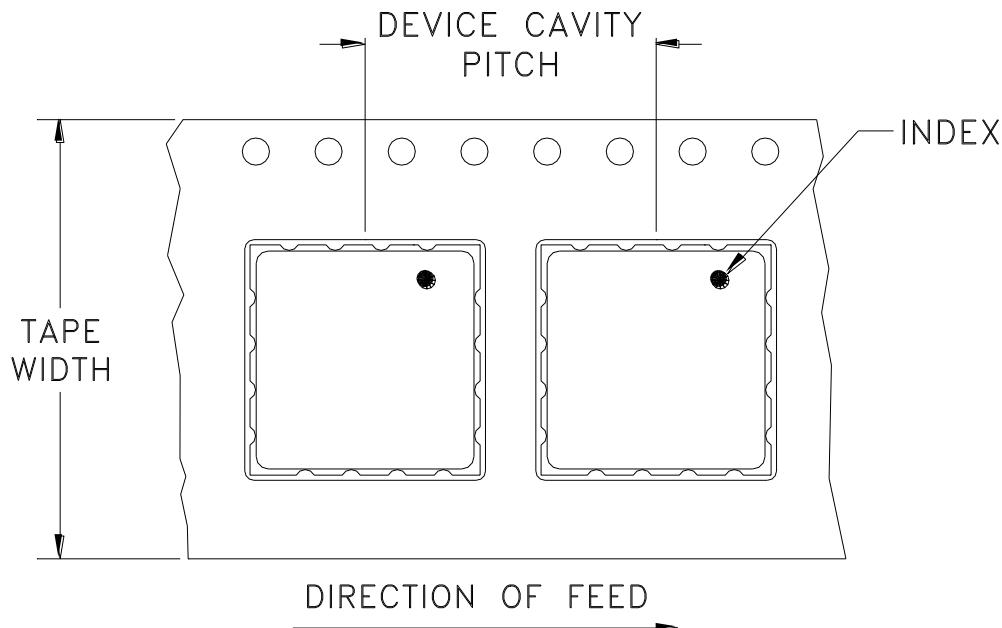

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
24	16	7	Small quantity standards (see note)	10 20 50 100
		13	Standard	200 500

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.


Go to: www.minicircuits.com/pages/pdfs/tape.pdf



Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010


INTERNET <http://www.minicircuits.com>

THIRD ANGLE PROJECTION



REVISI

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M116338	NEW RELEASE (FROM RAVON)	03/08	DK	HH
OR	R72078	NEW RELEASE (FROM RAVON)	03/08	DK	HH

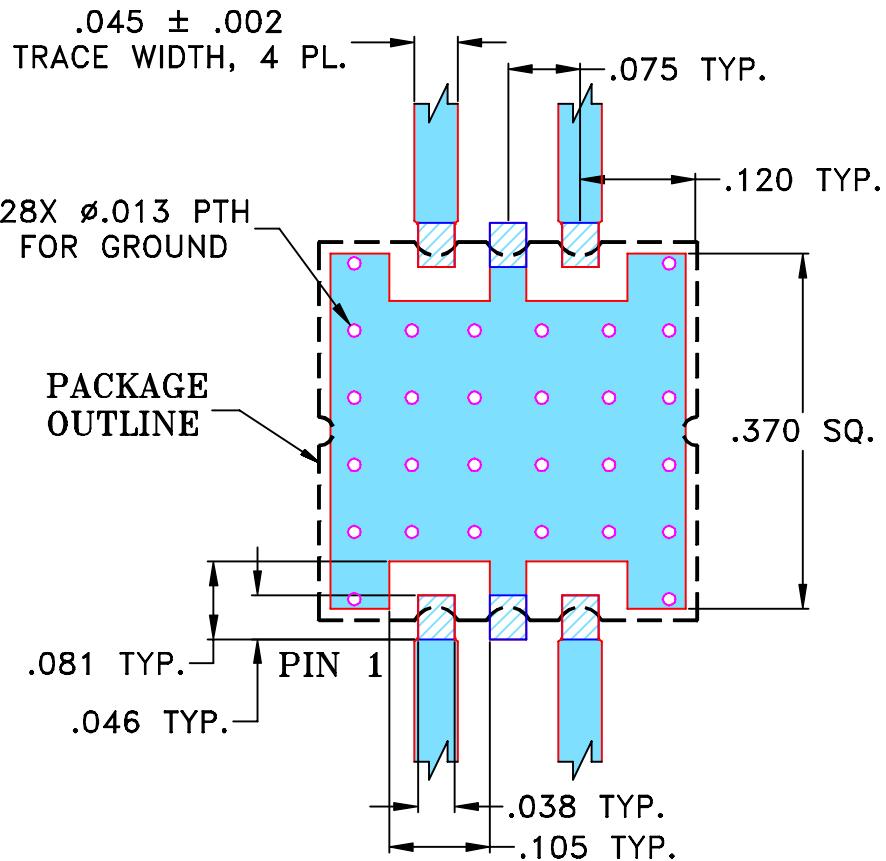
SUGGESTED MOUNTING CONFIGURATION FOR
HE1354 CASE STYLE, "qg" PIN CONNECTION, 50 Ω

NOTE:

1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025"±.002".
COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC
(SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ON:

2 PL DECIMALS ±

3 PL DECIMALS ± .005

ANGLES ±

FRACTIONS ±

INITIALS

DRAWN

CHECKED

APPROVED

DATE

16 MAR 08

16 MAR 08

16 MAR 08



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, qg, HE1354, TB-474+

SIZE

A

CODE IDENT

15542

DRAWING NO:

98-PL-285

REV:

OR

FILE:

98PL285

SCALE:

5:1



SHEET:

1 OF 1

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS.
EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE
AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY
DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO.
THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

Evaluation Board and Circuit

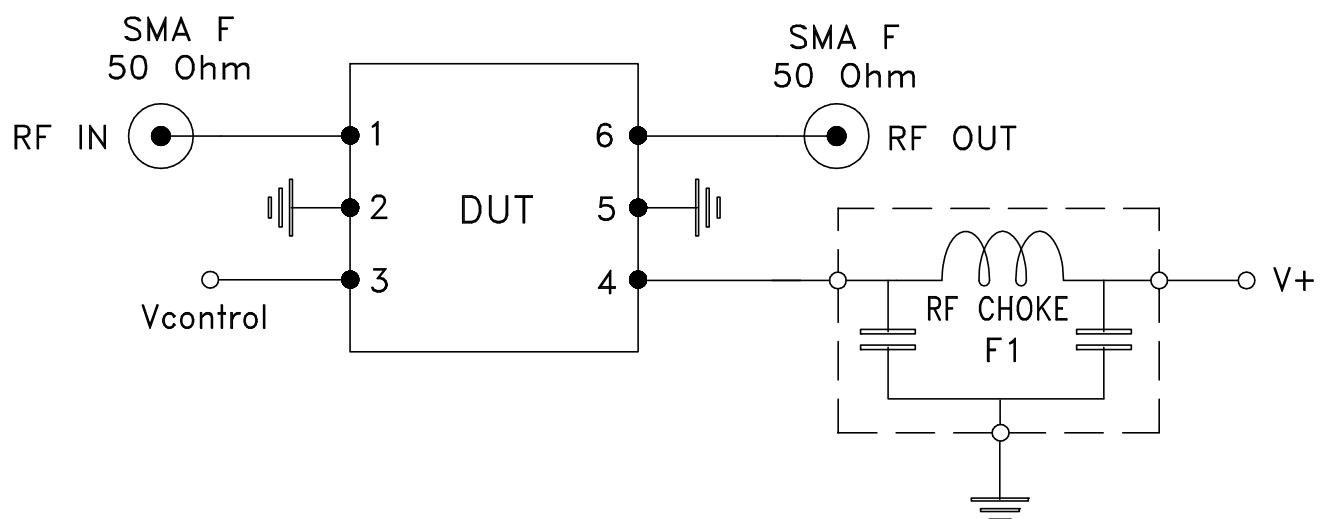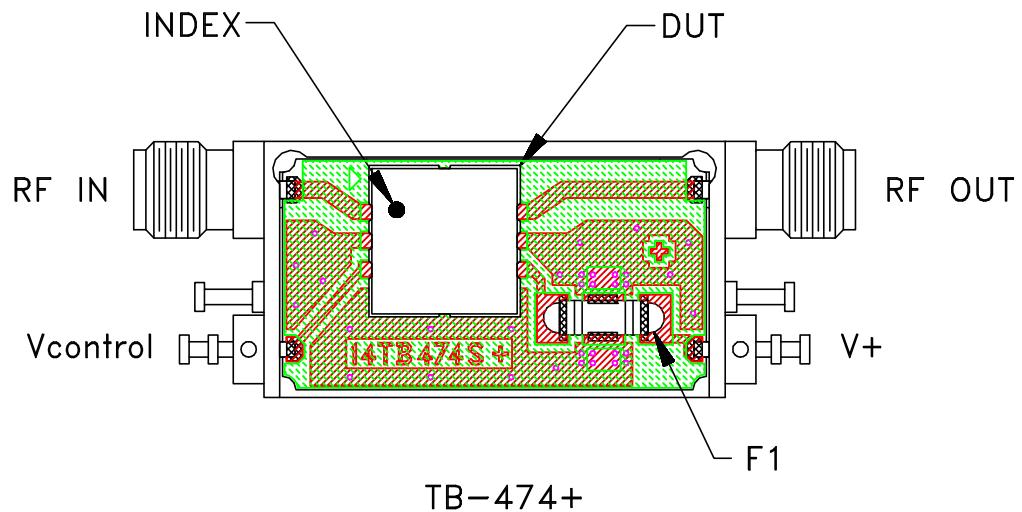

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: FR4 GRADE IT-180TC (ITEQ CORPORATION)
Dielectric Constant=4.5, Thickness=.025 inch.

 Mini-Circuits®



Environmental Specifications

ENV03T2

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
HAST	130°C, 85% RH, 96 hours	JESD22-A110
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutectic Process: 225°C peak Pb-Free Process, 245°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 20-2000 Hz, 4 times in each of three axes (total 12)	MIL-STD-883, Method 2007.3, Condition A
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + propylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215