


Product Overview


The Qorvo TGF2023-2-01 is a discrete 1.25 mm GaN on SiC HEMT which operates from DC-18 GHz. The TGF2023-2-01 is designed using Qorvo's proven QGaN25 production process. This process features advanced field plate techniques to optimize microwave power and efficiency at high drain bias operating conditions.

The TGF2023-2-01 typically provides 37.7 dBm of saturated output power with power gain of 20.7 dB at 3 GHz. The maximum power added efficiency is 71.6% which makes the TGF2023-2-01 appropriate for high efficiency applications.

Lead-free and RoHS compliant

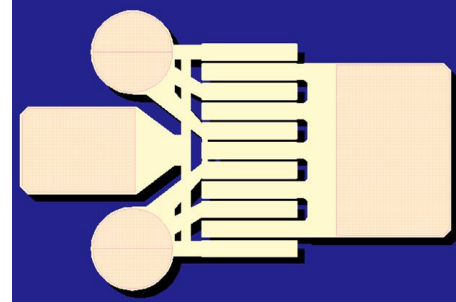

Functional Block Diagram



Key Features

- Frequency Range: DC - 18 GHz
 - Output Power (P_{3dB})¹: 38 dBm
 - Maximum PAE¹: 71.6%
 - Linear Gain¹: 18 dB
 - Bias: $V_D = 12 - 32$ V, $I_{DQ} = 25 - 125$ mA
 - Technology: TQGaN25 on SiC
 - Chip Dimensions: 0.82 x 0.66 x 0.10 mm
- Note 1: @ 3 GHz

Applications

- Defense & Aerospace
- Broadband Wireless

Pad Configuration

| Pad No. | Symbol |
|----------|-----------------|
| 1 | V_G / RF IN |
| 2 | V_D / RF OUT |
| Backside | Source / Ground |

Ordering Information

| Part Number | Description |
|--------------|-----------------|
| TGF2023-2-01 | 6 Watt GaN HEMT |

Absolute Maximum Ratings

| Parameter | Rating |
|------------------------------------|--------------------|
| Drain to Gate Voltage (V_{DG}) | 100 V |
| Drain Voltage (V_D) | 40 V |
| Gate Voltage Range (V_G) | -7 to 2 V |
| Drain Current (I_D) | 1.438 A |
| Gate Current (I_G) | -1.25 to 3.5 mA |
| Power Dissipation, CW (P_D) | See graph on pg.4. |
| CW Input Power (P_{IN}) | +31 dBm |
| Storage Temperature | -65 to 150°C |

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability.

Recommended Operating Conditions

| Parameter | Min | Typ | Max | Units |
|---|-------|------|------|-------|
| Drain Voltage Range (V_D) | +12 | +28 | +40 | V |
| Drain Quiescent Current (I_{DQ}) | - | 62.5 | - | mA |
| Gate Voltage, V_G^1 | -3.7 | -2.8 | -2.3 | V |
| Gate Leakage: $V_D = +10$ V, $V_G = -3.7$ V | -1.25 | - | - | mA |

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.

Note:

1. To be adjusted to desired I_{DQ}

RF Characterization – Model Optimum Power Tune

Test conditions unless otherwise noted: T = 25°C, Pulse (10% Duty Cycle, 100 μ s Width).

| Parameter | Typical Value | | | | | | | | Units |
|---|-------------------|-------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------|
| | 3 | | 6 | | 8 | | 10 | | |
| Frequency (F) | | | | | | | | | GHz |
| Drain Voltage (V_D) | 28 | 28 | 28 | 28 | 28 | 28 | 28 | 28 | V |
| Bias Current (I_{DQ}) | 25 | 62.5 | 25 | 62.5 | 25 | 62.5 | 25 | 62.5 | mA |
| Output P3dB (P_{3dB}) | 38 | 37.8 | 38.1 | 38.0 | 38.1 | 38.0 | 38.1 | 38.0 | dBm |
| Drain Eff. @ P3dB (DE_{3dB}) | 60.2 | 59.1 | 57.7 | 57.3 | 55.4 | 55.6 | 53 | 53.3 | % |
| Gain @ P3dB (G_{3dB}) | 20 | 20.8 | 14.6 | 15.4 | 12.2 | 13 | 10.4 | 11.2 | dB |
| Parallel Resistance ⁽¹⁾ (R_p) | 65.2 | 65.1 | 63.1 | 62.7 | 59.3 | 59.7 | 56.1 | 55.8 | Ω -mm |
| Parallel Capacitance ⁽¹⁾ (C_p) | 0.318 | 0.312 | 0.324 | 0.321 | 0.341 | 0.343 | 0.328 | 0.330 | pF/mm |
| Load Reflection Coefficient ⁽²⁾ (Γ_L) | 0.19 \angle 94° | 0.19 \angle 95° | 0.36 \angle 110° | 0.35 \angle 110° | 0.46 \angle 120° | 0.47 \angle 120° | 0.52 \angle 126° | 0.52 \angle 127° | -- |

Notes:

1. Large signal equivalent output network (normalized).
2. Characteristic Impedance (Z_0) = 50 Ω .

RF Characterization – Model Optimum Efficiency Tune

Test conditions unless otherwise noted: T = 25°C, Pulse (10% Duty Cycle, 100 μ s Width).

| Parameter | Typical Value | | | | | | | | Units |
|---|-------------------|-------------------|-------------------|-------------------|--------------------|--------------------|--------------------|--------------------|--------------|
| | 3 | | 6 | | 8 | | 10 | | |
| Frequency (F) | | | | | | | | | GHz |
| Drain Voltage (V_D) | 28 | 28 | 28 | 28 | 28 | 28 | 28 | 28 | V |
| Bias Current (I_{DQ}) | 25 | 62.5 | 25 | 62.5 | 25 | 62.5 | 25 | 62.5 | mA |
| Output P3dB (P_{3dB}) | 36.8 | 36.7 | 37.0 | 37.0 | 37 | 37.1 | 37.1 | 37.1 | dBm |
| Drain Eff. @ P3dB (DE_{3dB}) | 65.6 | 64.3 | 63.3 | 62.5 | 60.5 | 60.1 | 57.3 | 57.4 | % |
| Gain @ P3dB (G_{3dB}) | 21.6 | 22.4 | 15.9 | 16.6 | 13.3 | 14.1 | 11.4 | 12.2 | dB |
| Parallel Resistance ⁽¹⁾ (R_p) | 110 | 112 | 104 | 100 | 99.8 | 94.4 | 88.9 | 85.9 | Ω -mm |
| Parallel Capacitance ⁽¹⁾ (C_p) | 0.398 | 0.384 | 0.394 | 0.390 | 0.394 | 0.390 | 0.384 | 0.386 | pF/mm |
| Load Reflection Coefficient ⁽²⁾ (Γ_L) | 0.39 \angle 64° | 0.39 \angle 62° | 0.55 \angle 97° | 0.53 \angle 97° | 0.63 \angle 110° | 0.62 \angle 111° | 0.68 \angle 120° | 0.67 \angle 121° | -- |

Notes:

1. Large signal equivalent output network (normalized).
2. Characteristic Impedance (Z_0) = 50 Ω .

Thermal and Reliability Information - CW ⁽¹⁾

| Parameter | Test Conditions | Value | Units |
|--|---|-------|--------------------|
| Thermal Resistance, Peak IR Surface Temperature at Average Power (θ_{JC}) | $P_{DISS} = 1.25\text{ W}$, $T_{baseplate} = 85^\circ\text{C}$ | 12.7 | $^\circ\text{C/W}$ |
| Channel Temperature, T_{CH} | | 101 | $^\circ\text{C}$ |
| Thermal Resistance, Peak IR Surface Temperature at Average Power (θ_{JC}) | $P_{DISS} = 2.5\text{ W}$, $T_{baseplate} = 85^\circ\text{C}$ | 14.1 | $^\circ\text{C/W}$ |
| Channel Temperature, T_{CH} | | 120 | $^\circ\text{C}$ |
| Thermal Resistance, Peak IR Surface Temperature at Average Power (θ_{JC}) | $P_{DISS} = 3.75\text{ W}$, $T_{baseplate} = 85^\circ\text{C}$ | 14.7 | $^\circ\text{C/W}$ |
| Channel Temperature, T_{CH} | | 140 | $^\circ\text{C}$ |
| Thermal Resistance, Peak IR Surface Temperature at Average Power (θ_{JC}) | $P_{DISS} = 5.00\text{ W}$, $T_{baseplate} = 85^\circ\text{C}$ | 15.2 | $^\circ\text{C/W}$ |
| Channel Temperature, T_{CH} | | 161 | $^\circ\text{C}$ |
| Thermal Resistance, Peak IR Surface Temperature at Average Power (θ_{JC}) | $P_{DISS} = 6.25\text{ W}$, $T_{baseplate} = 85^\circ\text{C}$ | 15.9 | $^\circ\text{C/W}$ |
| Channel Temperature, T_{CH} | | 184 | $^\circ\text{C}$ |

Notes:

1. Refer to the following document: [GaN Device Channel Temperature, Thermal Resistance, and Reliability Estimates](#)



Thermal and Reliability Information - Pulsed ⁽¹⁾

| Parameter | Test Conditions | Value | Units |
|--|--|------------------|--------------------|
| Thermal Resistance, Peak IR Surface Temperature at Average Power (θ_{JC}) | $P_{DISS} = 6.25\text{ W}$, $T_{baseplate} = 85^\circ\text{C}$ Pulse Width = 100 μS | 11.5 | $^\circ\text{C/W}$ |
| Channel Temperature, T_{CH} | | Duty Cycle = 5% | 157 |
| Thermal Resistance, Peak IR Surface Temperature at Average Power (θ_{JC}) | $P_{DISS} = 6.25\text{ W}$, $T_{baseplate} = 85^\circ\text{C}$ Pulse Width = 100 μS | 11.7 | $^\circ\text{C/W}$ |
| Channel Temperature, T_{CH} | | Duty Cycle = 10% | 158 |
| Thermal Resistance, Peak IR Surface Temperature at Average Power (θ_{JC}) | $P_{DISS} = 6.25\text{ W}$, $T_{baseplate} = 85^\circ\text{C}$ Pulse Width = 100 μS | 12.1 | $^\circ\text{C/W}$ |
| Channel Temperature, T_{CH} | | Duty Cycle = 20% | 161 |
| Thermal Resistance, Peak IR Surface Temperature at Average Power (θ_{JC}) | $P_{DISS} = 6.25\text{ W}$, $T_{baseplate} = 85^\circ\text{C}$ Pulse Width = 100 μS | 13.8 | $^\circ\text{C/W}$ |
| Channel Temperature, T_{CH} | | Duty Cycle = 50% | 171 |






Notes:

1. Refer to the following document: [GaN Device Channel Temperature, Thermal Resistance, and Reliability Estimates](#)

Maximum Channel Temperature



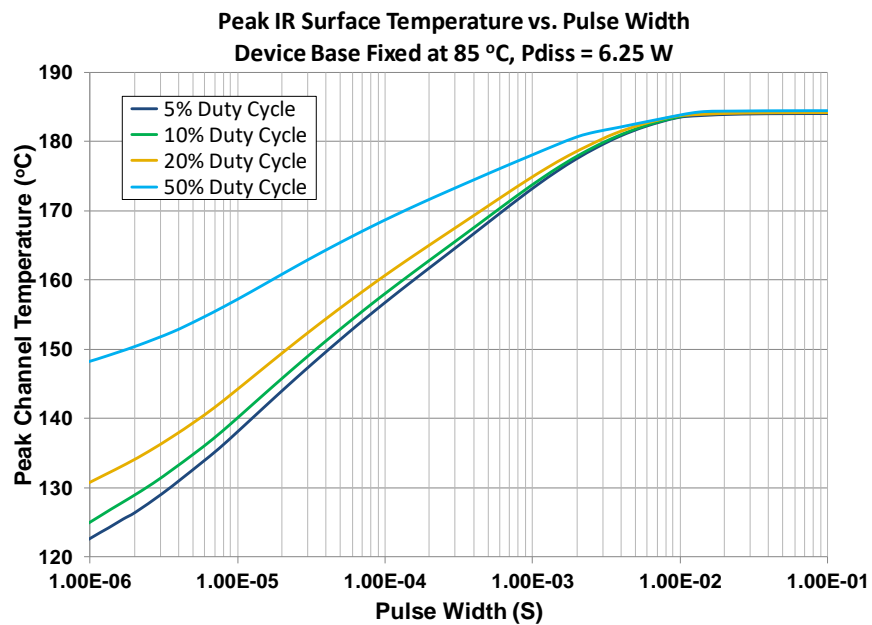
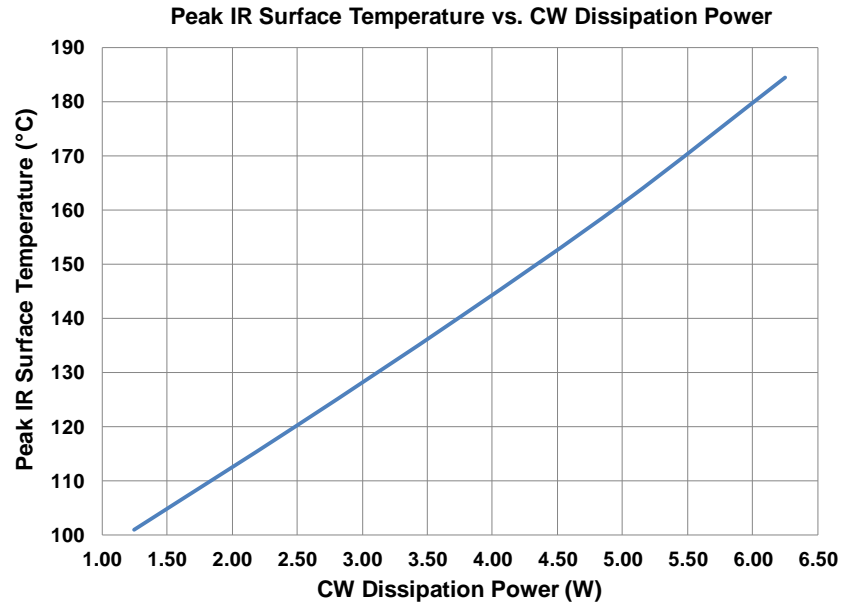


Model Maximum Gain Performance

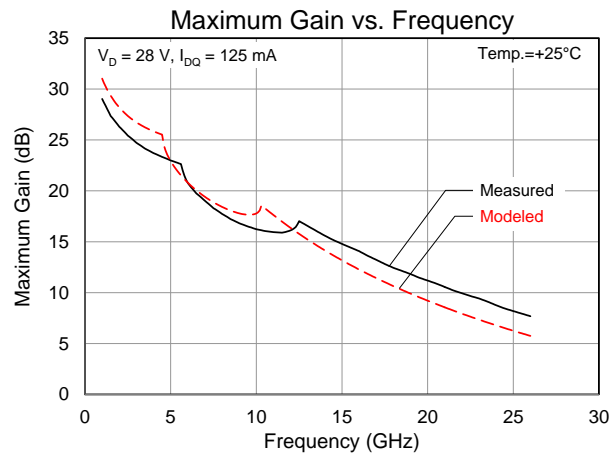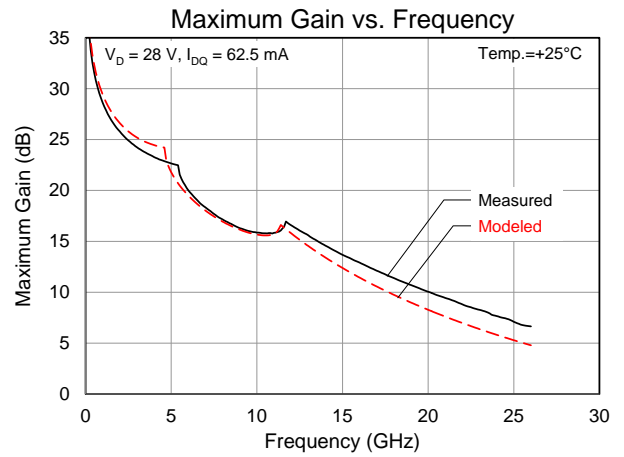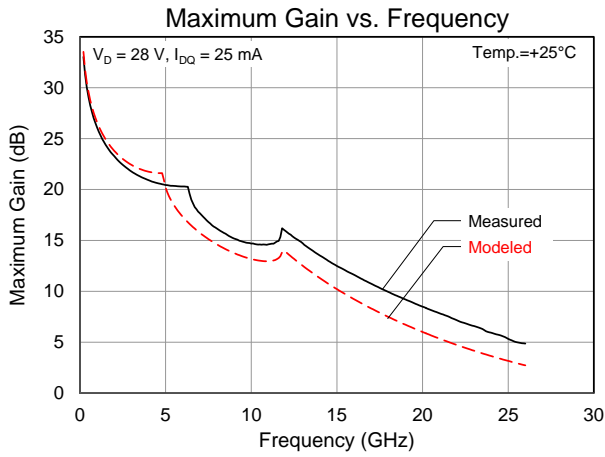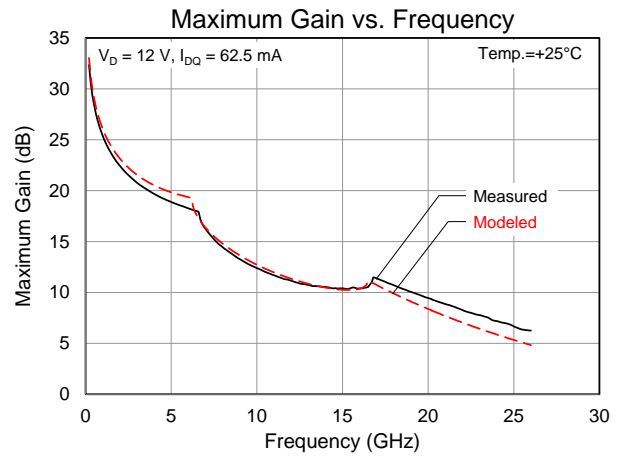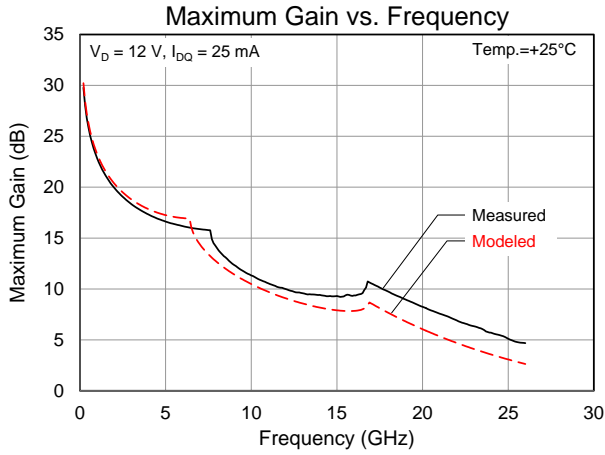





Model Load Pull Contours

Load pull signal: Pulse (10% Duty Cycle, 100 μ s Width). Bond wires included. Measured data provided by Modelithics.

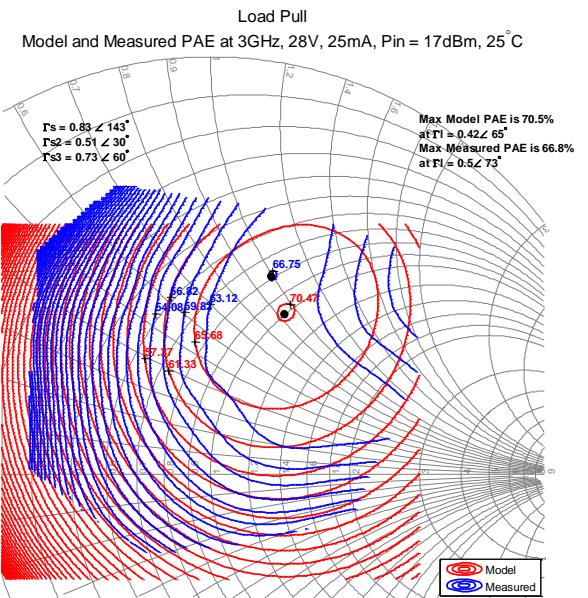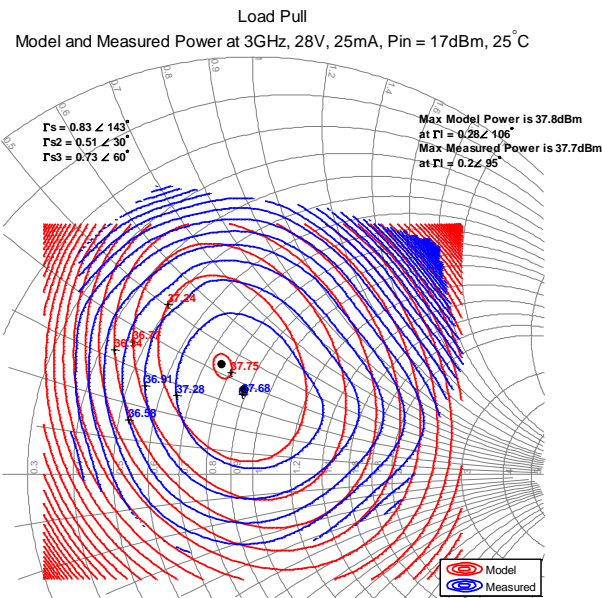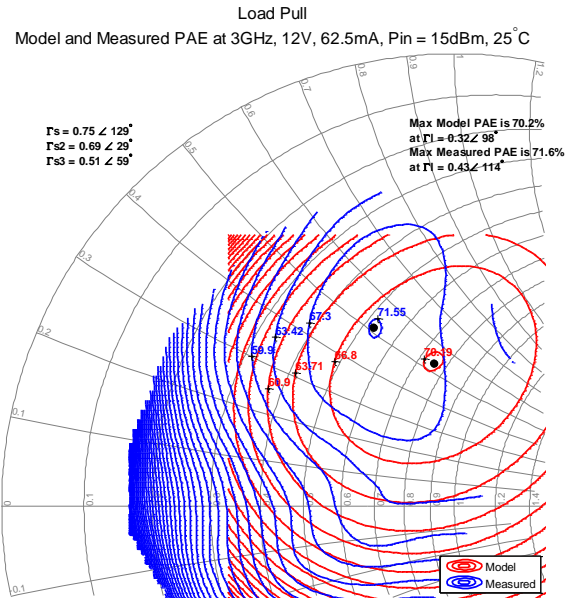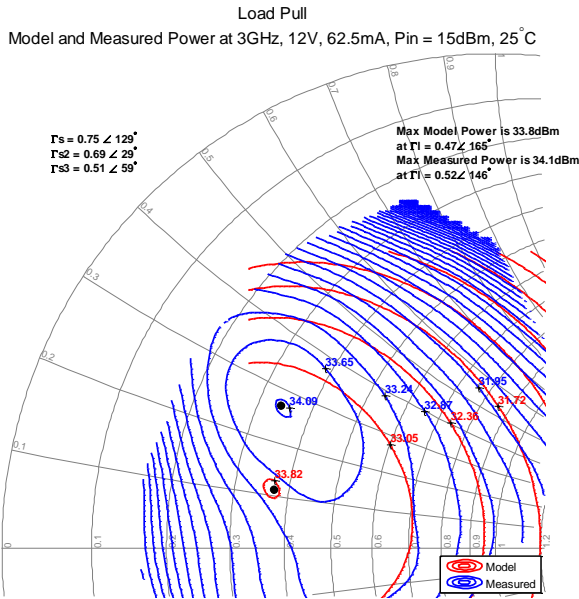



Model Load Pull Contours

Load pull signal: Pulse (10% Duty Cycle, 100 μs Width). Bond wires included. Measured data provided by Modelithics.

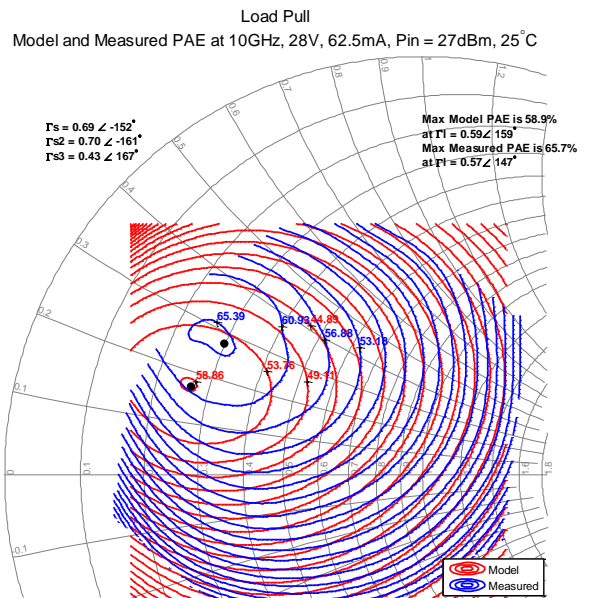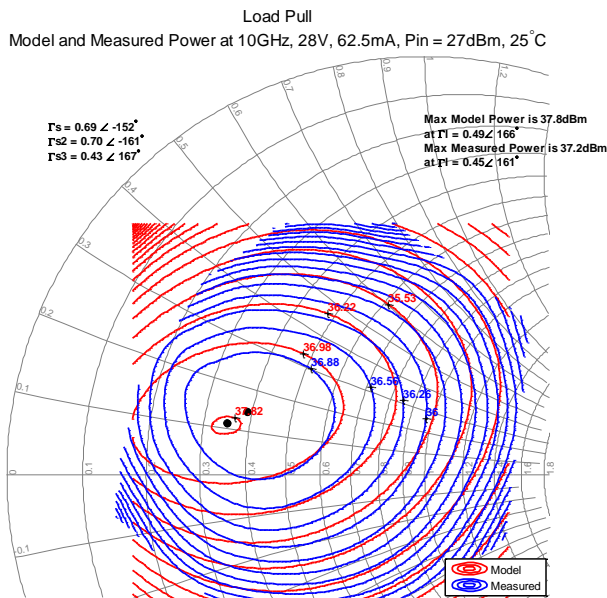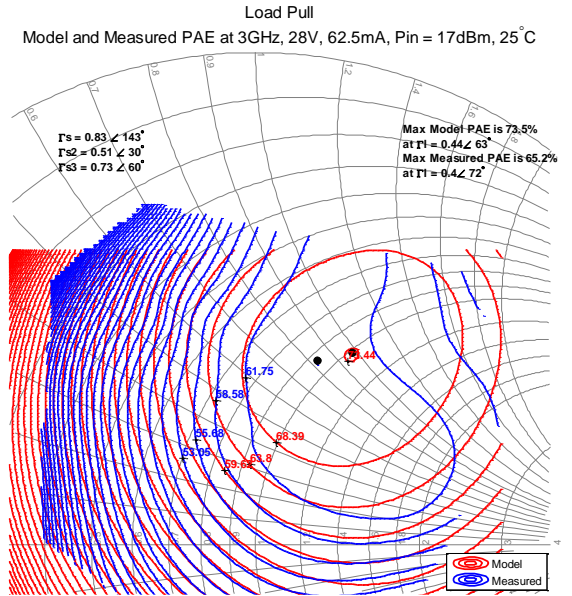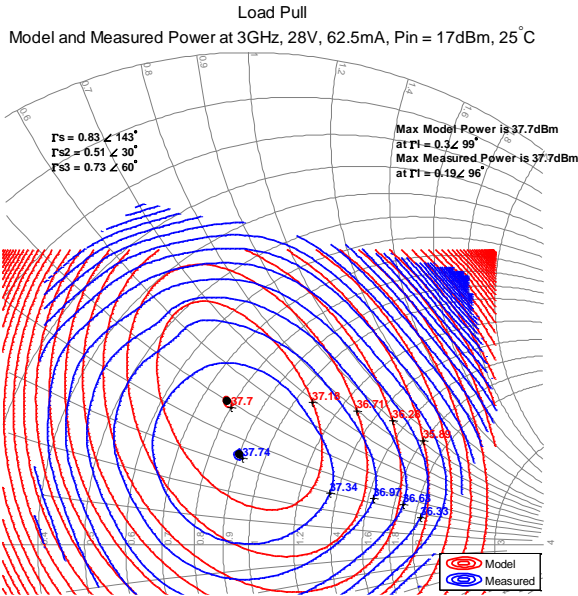




Model Load Pull Contours

Load pull signal: Pulse (10% Duty Cycle, 100 μs Width). Bond wires included. Measured data provided by Modelithics.

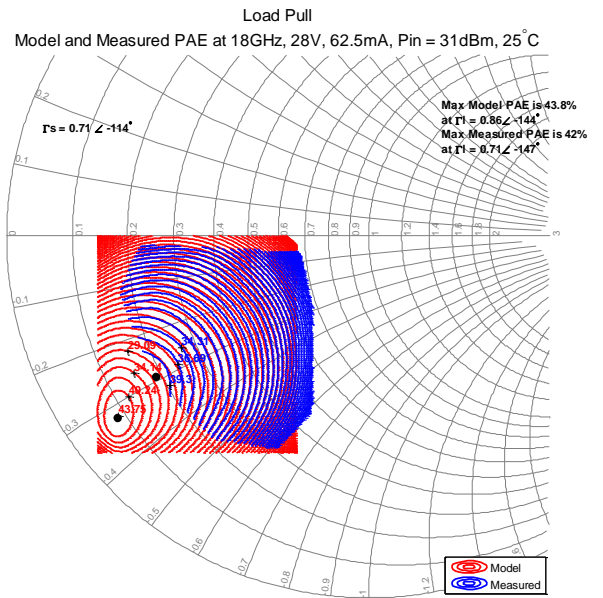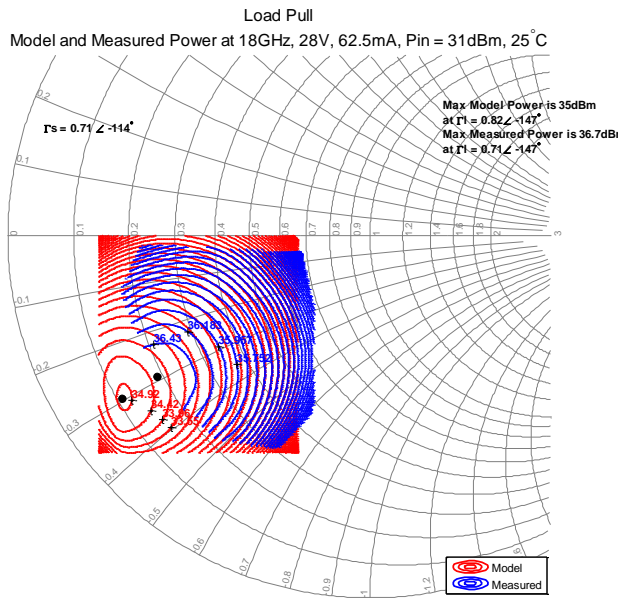




Model Load Pull Contours

Load pull signal: Pulse (10% Duty Cycle, 100 μ s Width). Bond wires included.

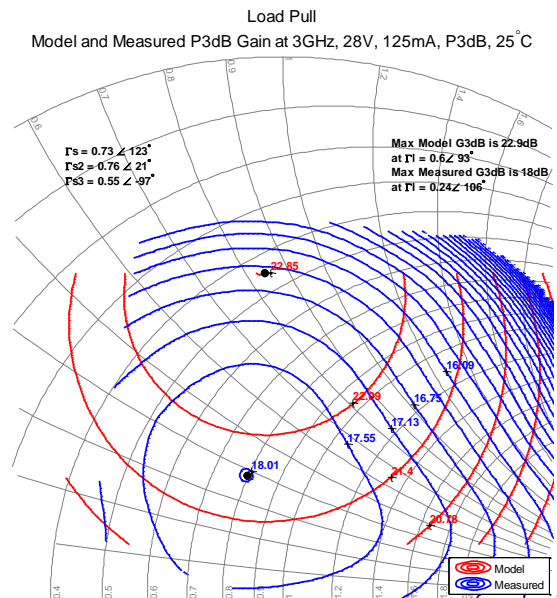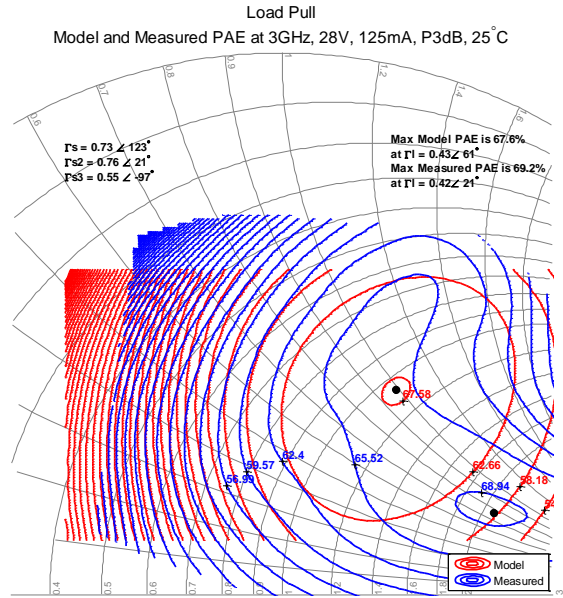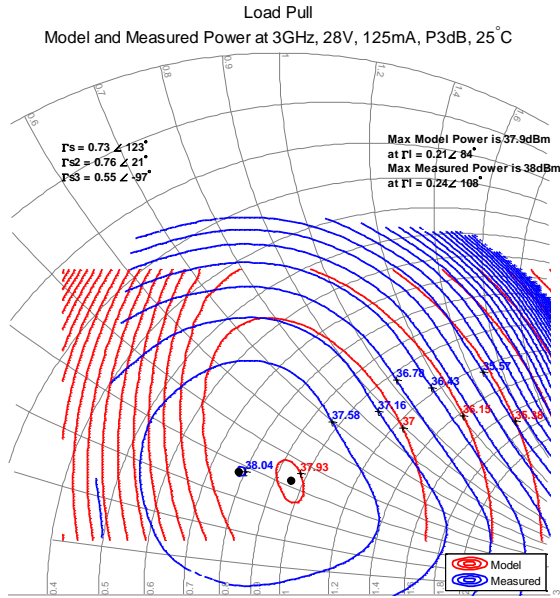




Model Load Pull Contours

Load pull signal: Pulse (10% Duty Cycle, 100 μ s Width). Bond wires included.

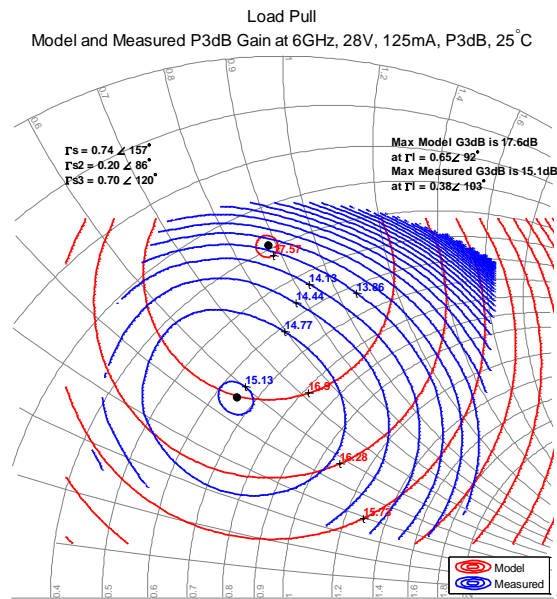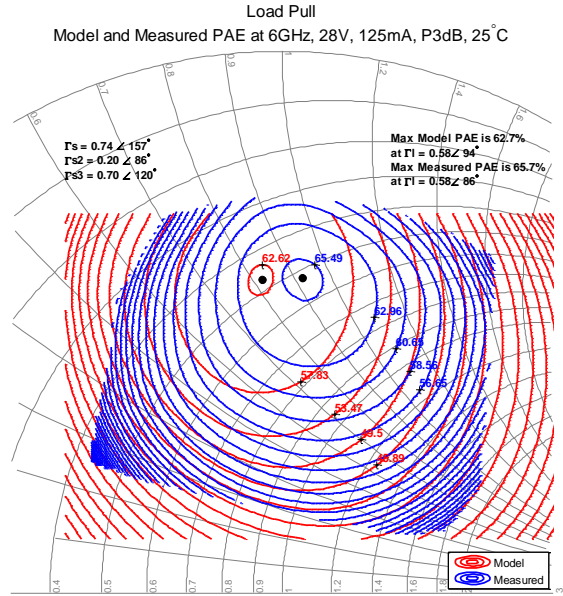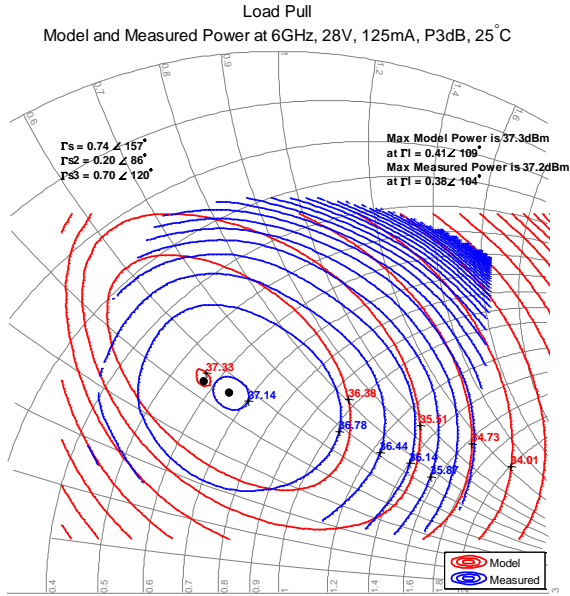




Model Load Pull Contours

Load pull signal: Pulse (10% Duty Cycle, 100 μs Width). Bond wires included.

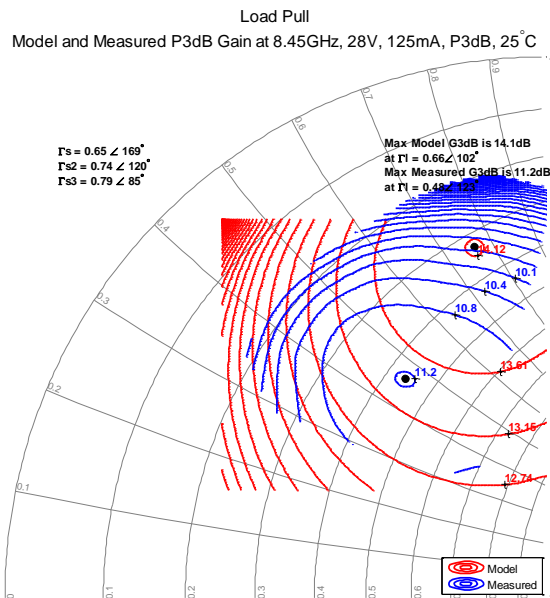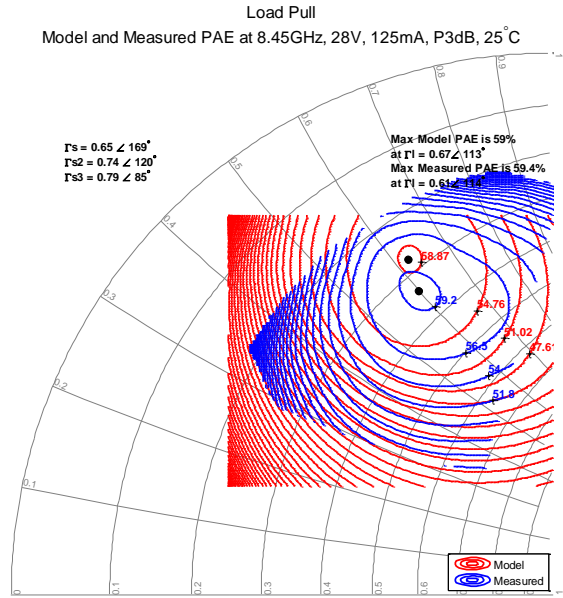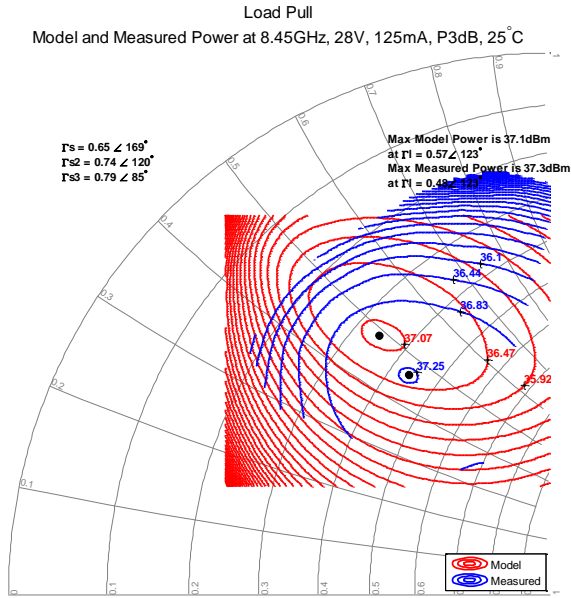




Model Load Pull Contours

Load pull signal: Pulse (10% Duty Cycle, 100 μ s Width). Bond wires included.

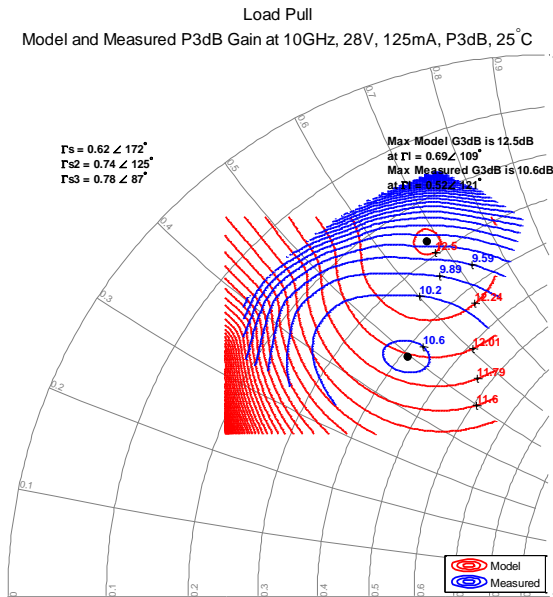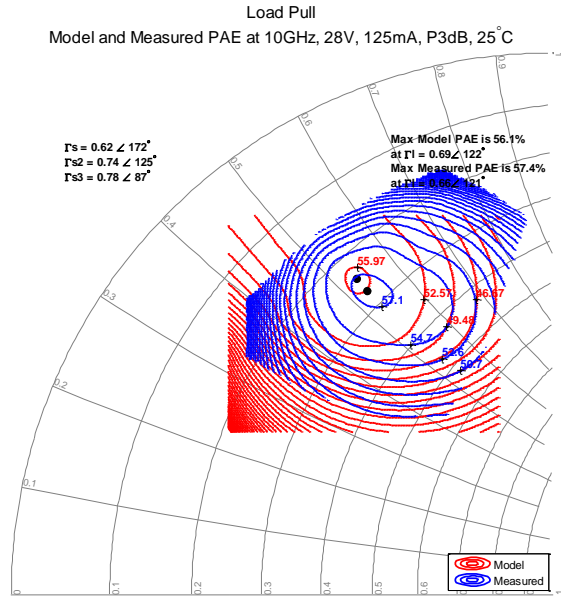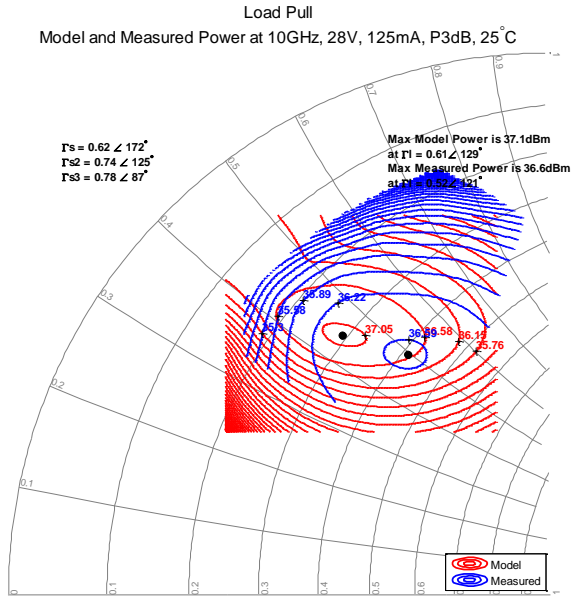



Model Load Pull Contours

Load pull signal: Pulse (10% Duty Cycle, 100 μ s Width). Bond wires included.

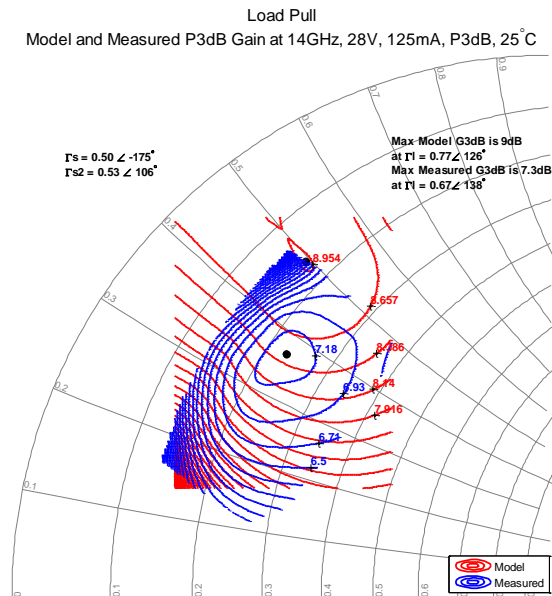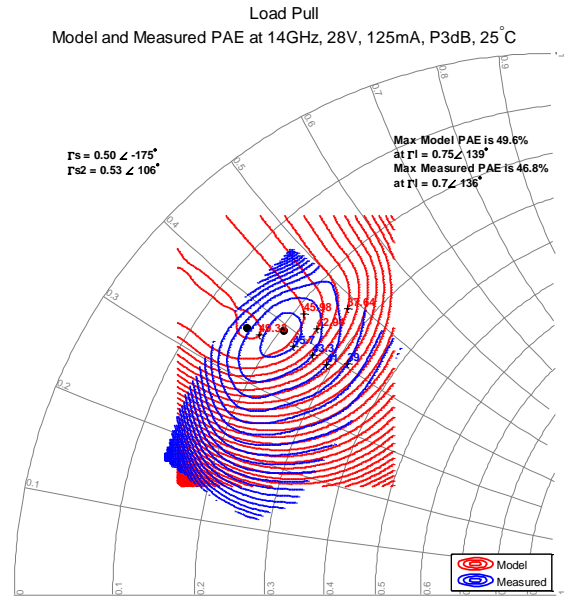
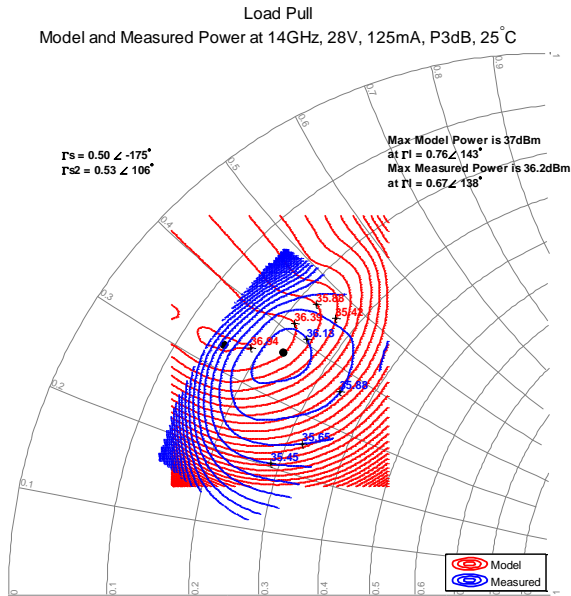


Measured Power Tuned Data



Modelithics provided measured data at 25mA and 62.5mA bias currents.

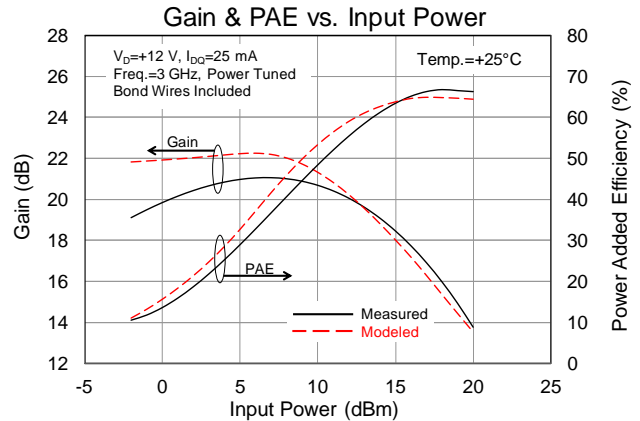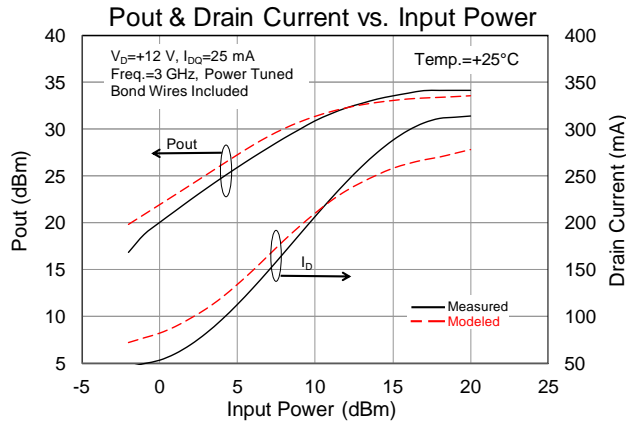

Source Γ : fo: $0.75\angle 129^\circ$, 2fo: $0.69\angle 29^\circ$, 3fo: $0.51\angle 59^\circ$
 Load Γ : fo: $0.36\angle 144^\circ$, 2fo: $0.33\angle 60^\circ$, 3fo: $0.12\angle 148^\circ$

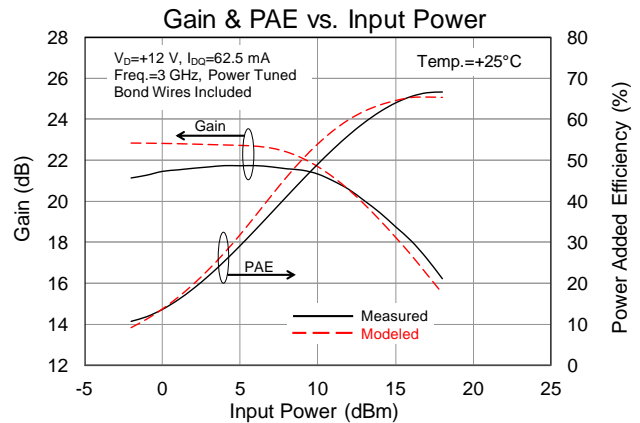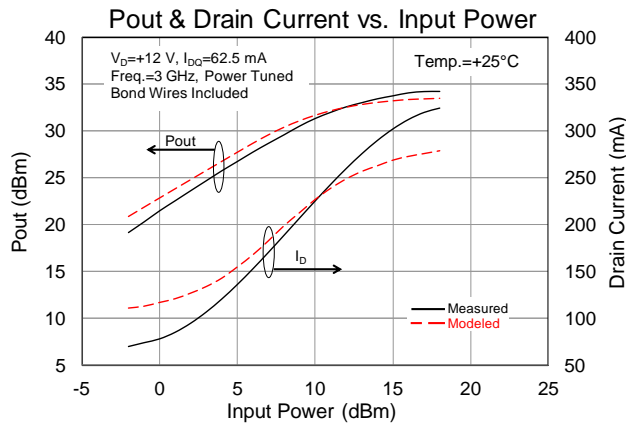



Source Γ : fo: $0.75\angle 129^\circ$, 2fo: $0.69\angle 29^\circ$, 3fo: $0.51\angle 59^\circ$
 Load Γ : fo: $0.36\angle 144^\circ$, 2fo: $0.33\angle 60^\circ$, 3fo: $0.12\angle 148^\circ$

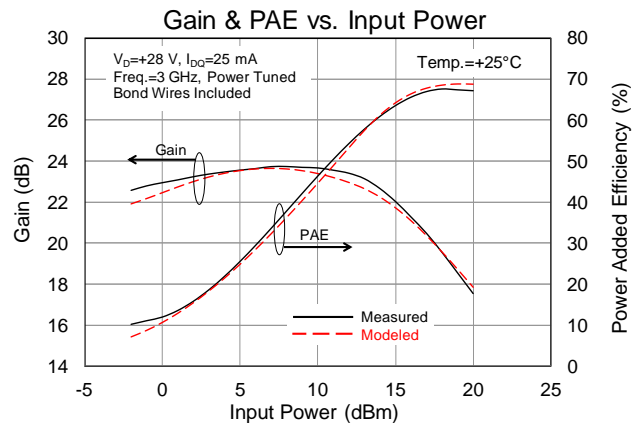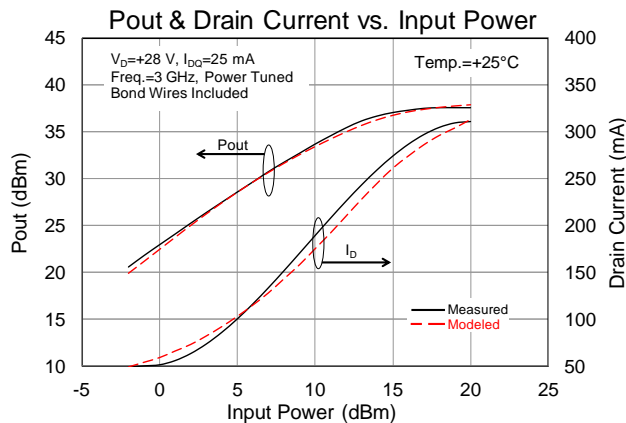



Source Γ : fo: $0.83\angle 142^\circ$, 2fo: $0.51\angle 30^\circ$, 3fo: $0.73\angle 60^\circ$
 Load Γ : fo: $0.29\angle 82^\circ$, 2fo: $0.41\angle -137^\circ$, 3fo: $0.27\angle 44^\circ$

Measured Power Tuned Data



Modelithics provided measured data at 25mA and 62.5mA bias currents.

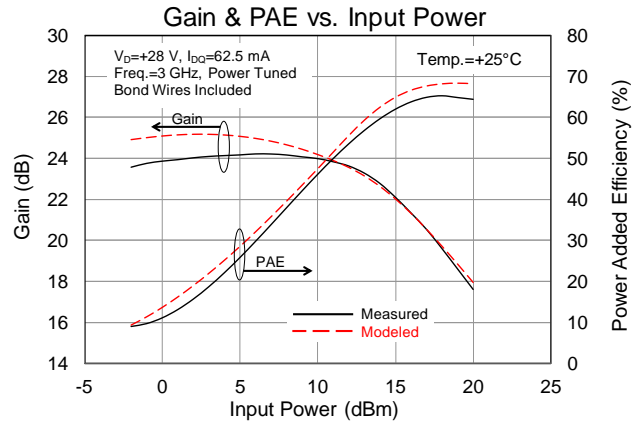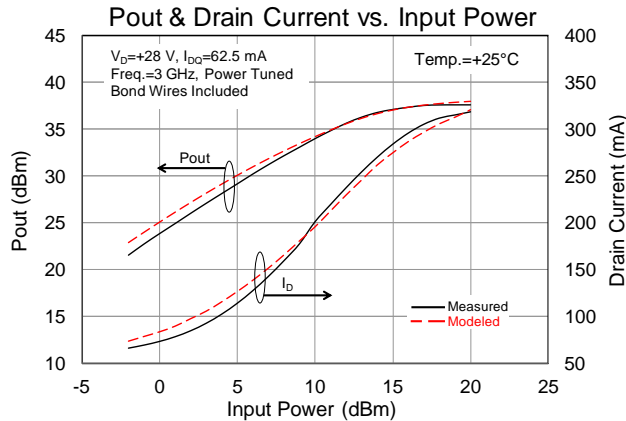

Source Γ : fo: $0.83\angle 142^\circ$, 2fo: $0.51\angle 30^\circ$, 3fo: $0.73\angle 60^\circ$
 Load Γ : fo: $0.29\angle 82^\circ$, 2fo: $0.41\angle -137^\circ$, 3fo: $0.27\angle 44^\circ$

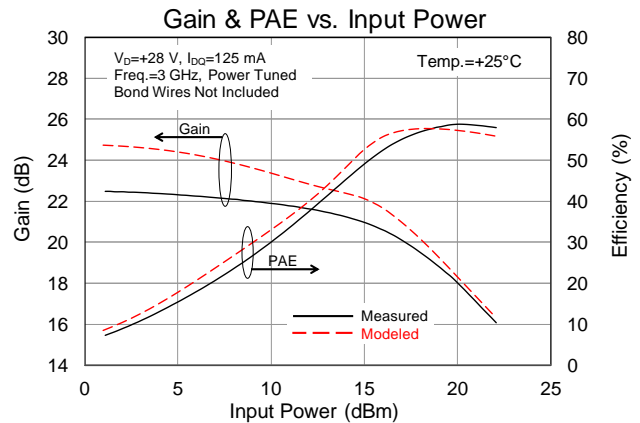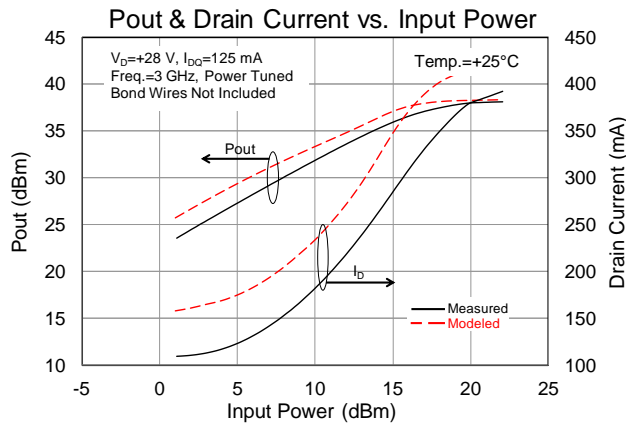



Source Γ : fo: $0.73\angle 123^\circ$, 2fo: $0.76\angle 21^\circ$, 3fo: $0.55\angle -97^\circ$
 Load Γ : fo: $0.23\angle -109^\circ$, 2fo: $0.01\angle -51^\circ$, 3fo: $0.26\angle 77^\circ$

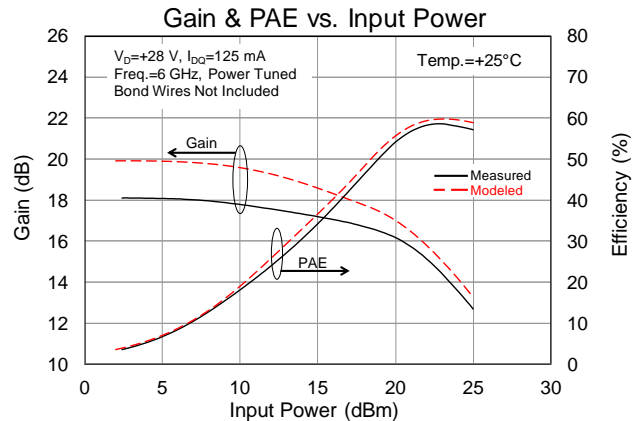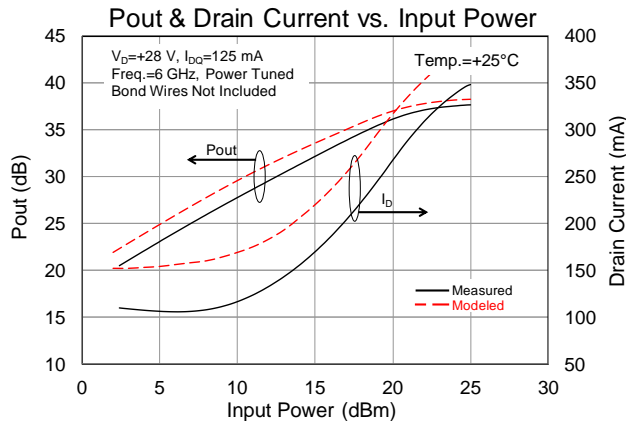



Source Γ : fo: $0.74\angle 157^\circ$, 2fo: $0.20\angle 86^\circ$, 3fo: $0.70\angle 120^\circ$
 Load Γ : fo: $0.35\angle 100^\circ$, 2fo: $0.22\angle 74^\circ$, 3fo: $0.35\angle 17^\circ$

Measured Power Tuned Data



Modelithics provided measured data at 25mA and 62.5mA bias currents.

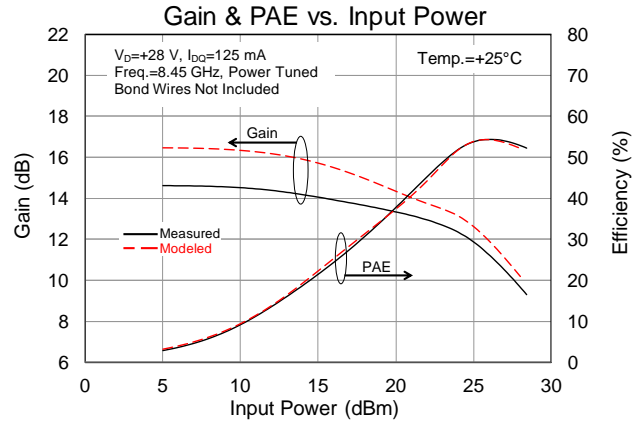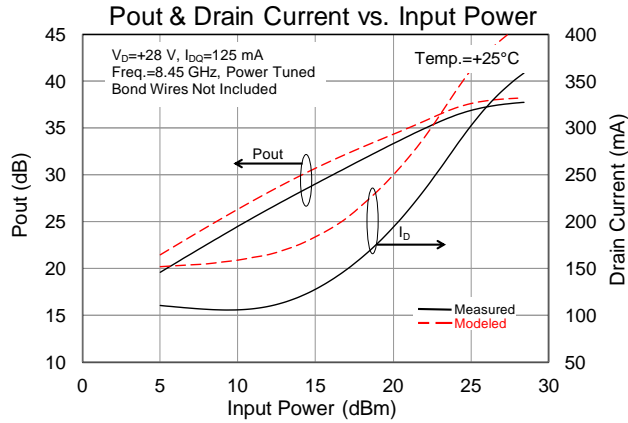

Source Γ : fo: $0.65\angle 169^\circ$, 2fo: $0.74\angle 120^\circ$, 3fo: $0.79\angle 85^\circ$
 Load Γ : fo: $0.47\angle 122^\circ$, 2fo: $0.69\angle 69^\circ$, 3fo: $0.61\angle 19^\circ$

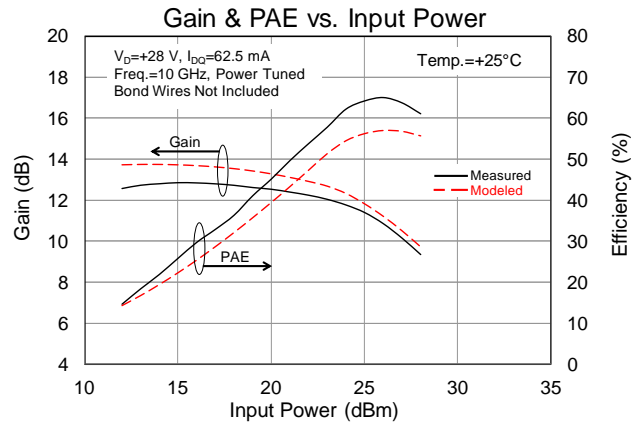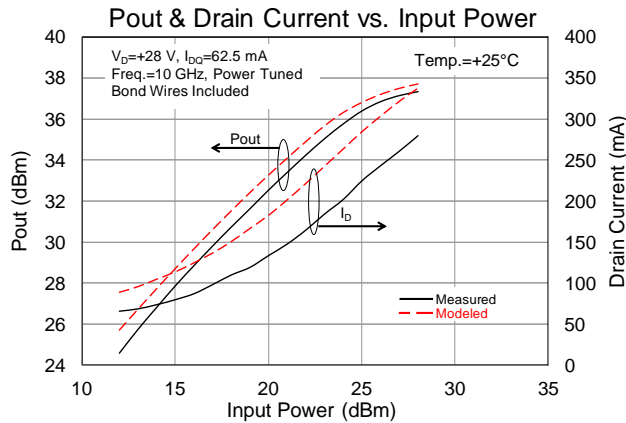



Source Γ : fo: $0.68\angle -152^\circ$, 2fo: $0.70\angle -161^\circ$, 3fo: $0.43\angle 167^\circ$
 Load Γ : fo: $0.49\angle 153^\circ$, 2fo: $0.46\angle 31^\circ$, 3fo: $0.20\angle -94^\circ$

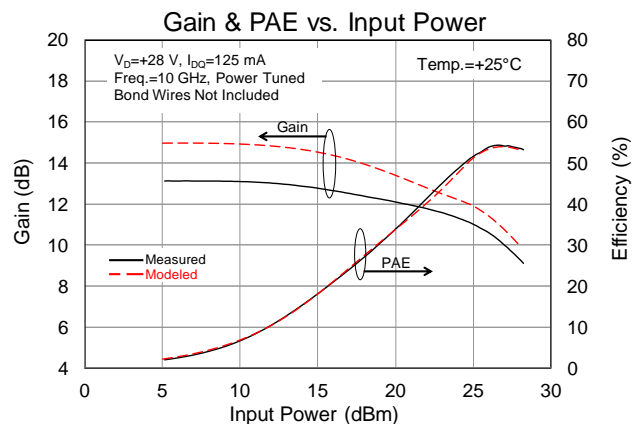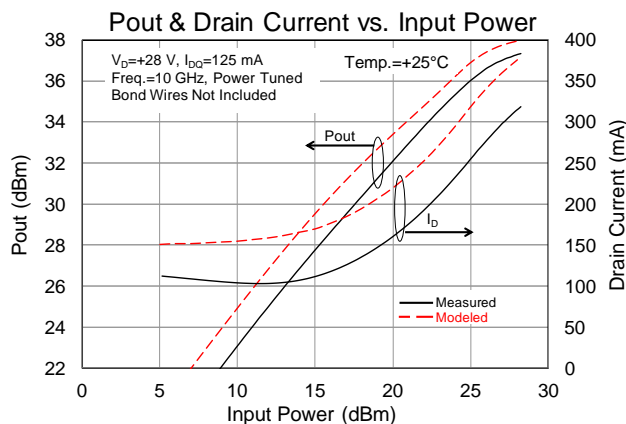



Source Γ : fo: $0.62\angle 172^\circ$, 2fo: $0.74\angle 125^\circ$, 3fo: $0.89\angle 62^\circ$
 Load Γ : fo: $0.54\angle 125^\circ$, 2fo: $0.65\angle 39^\circ$, 3fo: $0.41\angle -4.0^\circ$

Measured Power Tuned Data

Modelithics provided measured data at 25mA and 62.5mA bias currents.

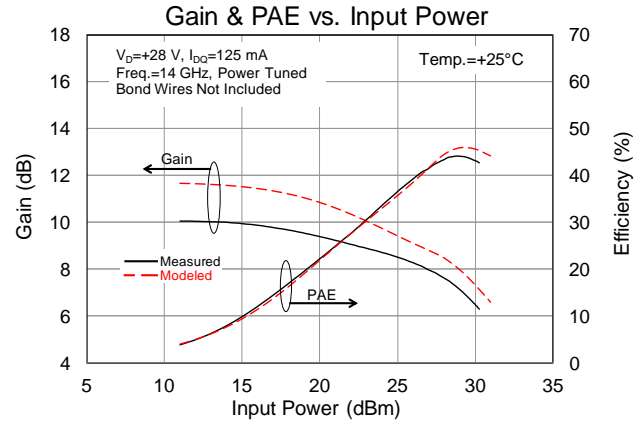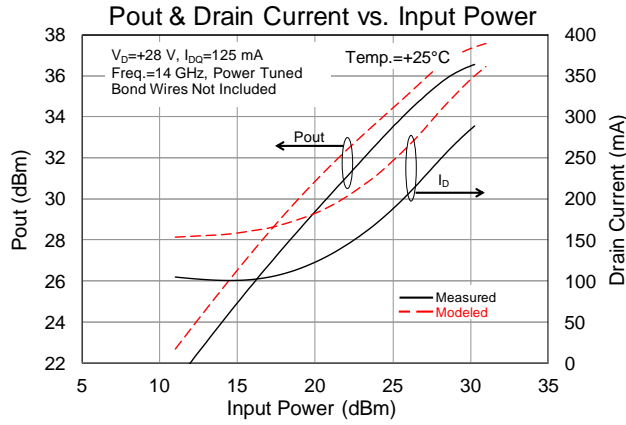



Source Γ : fo: $0.50\angle-175^\circ$, 2fo: $0.53\angle106^\circ$
 Load Γ : fo: $0.66\angle134^\circ$, 2fo: $0.82\angle67^\circ$

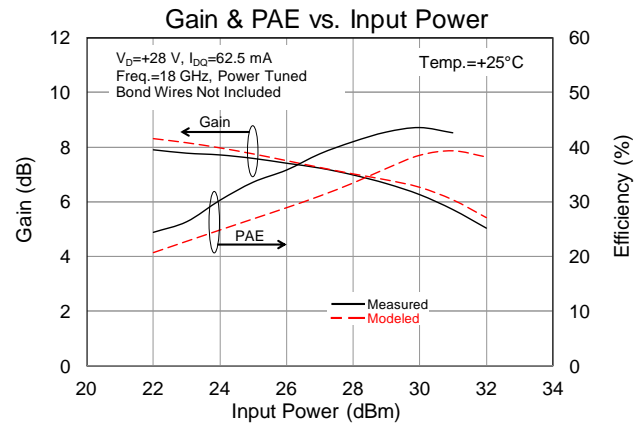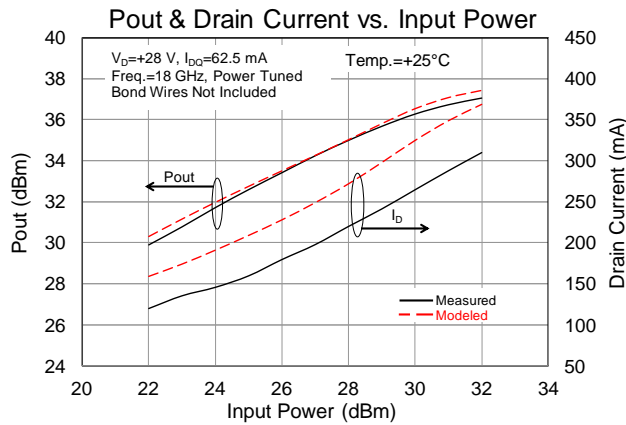



Source Γ : fo: $0.72\angle-114^\circ$
 Load Γ : fo: $0.71\angle-147^\circ$

Measured Efficiency Tuned Data



Modelithics provided measured data at 25mA and 62.5mA bias currents.

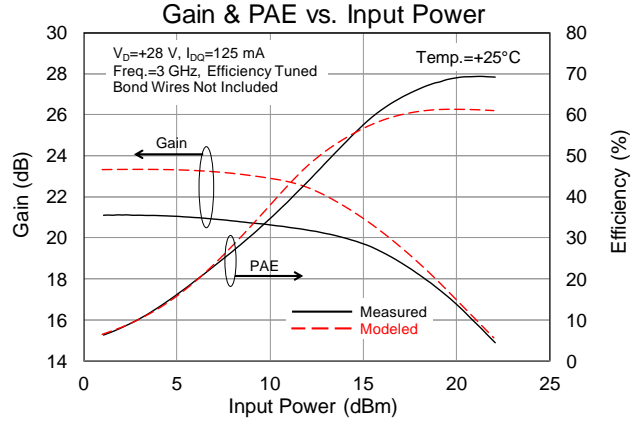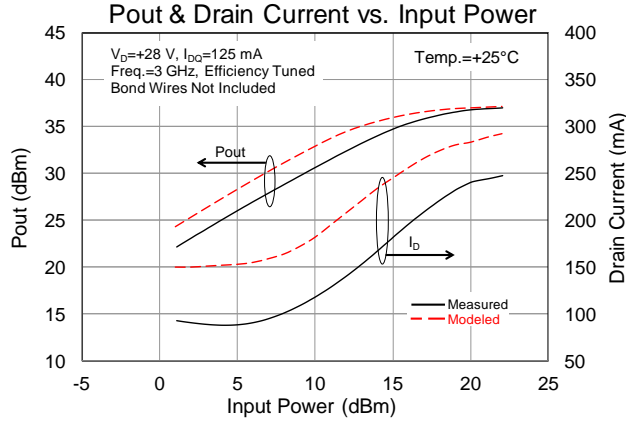

Source Γ : fo: $0.73\angle 123^\circ$, 2fo: $0.76\angle 21^\circ$, 3fo: $0.55\angle -97^\circ$
 Load Γ : fo: $0.41\angle 18^\circ$, 2fo: $0.62\angle 104^\circ$, 3fo: $0.35\angle -160^\circ$

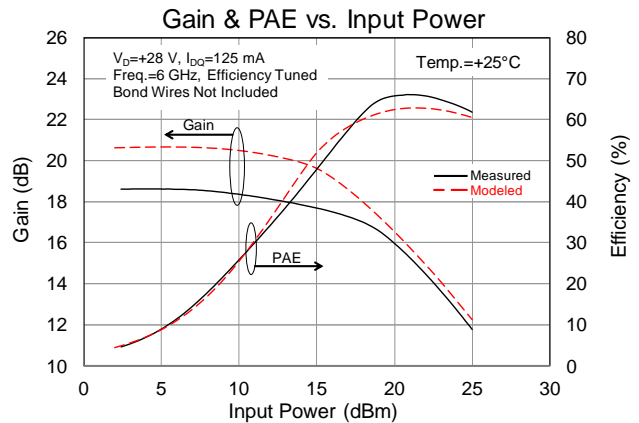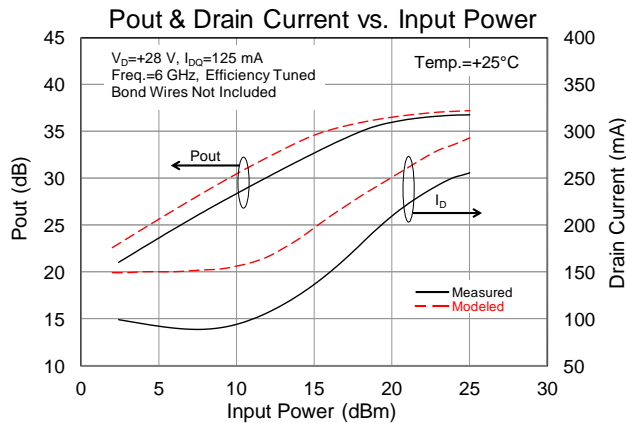



Source Γ : fo: $0.74\angle 157^\circ$, 2fo: $0.20\angle 86^\circ$, 3fo: $0.70\angle 120^\circ$
 Load Γ : fo: $0.55\angle 88^\circ$, 2fo: $0.20\angle 74^\circ$, 3fo: $0.30\angle -42^\circ$

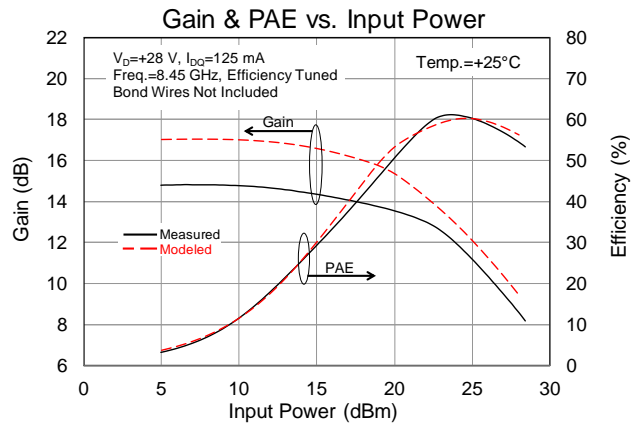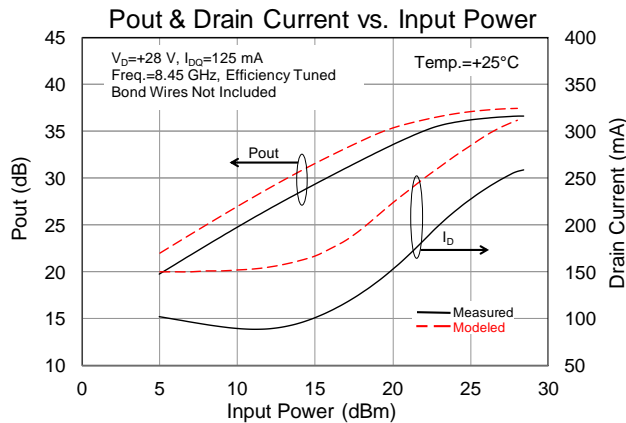



Source Γ : fo: $0.65\angle 169^\circ$, 2fo: $0.74\angle 120^\circ$, 3fo: $0.79\angle 85^\circ$
 Load Γ : fo: $0.65\angle 113^\circ$, 2fo: $0.78\angle 50^\circ$, 3fo: $0.57\angle -22^\circ$

Measured Efficiency Tuned Data

Modelithics provided measured data at 25mA and 62.5mA bias currents.

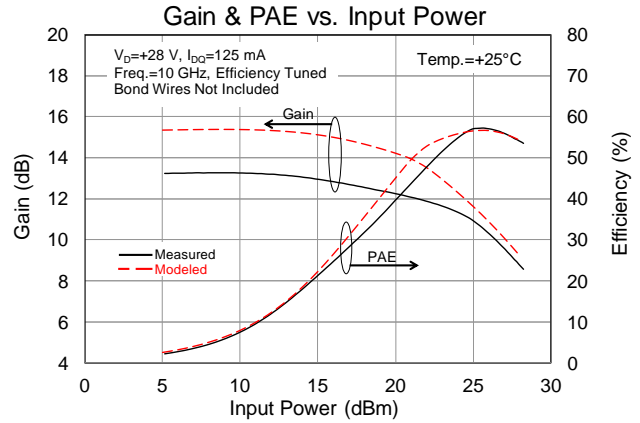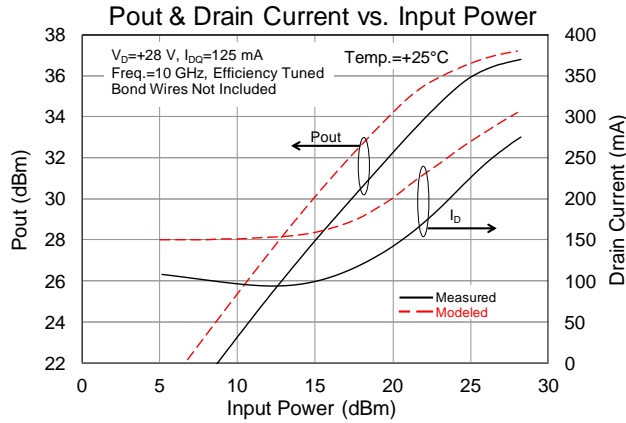


Source Γ : fo: $0.62\angle 172^\circ$, 2fo: $0.74\angle 125^\circ$, 3fo: $0.89\angle 62^\circ$
 Load Γ : fo: $0.68\angle 120^\circ$, 2fo: $0.69\angle 34^\circ$, 3fo: $0.41\angle -17^\circ$

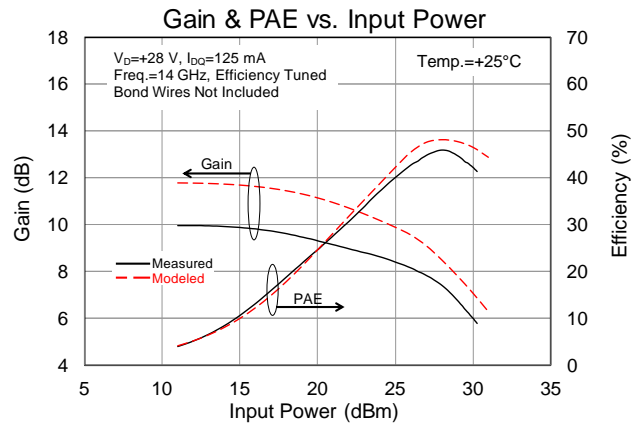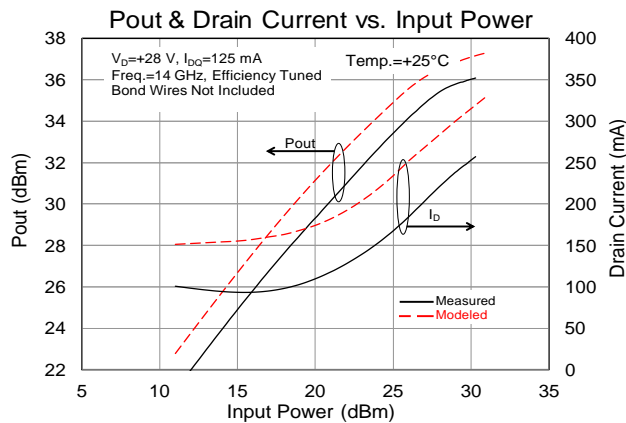

Source Γ : fo: $0.50\angle -175^\circ$, 2fo: $0.53\angle 106^\circ$
 Load Γ : fo: $0.73\angle 134^\circ$, 2fo: $0.84\angle 71^\circ$

Mechanical Drawing

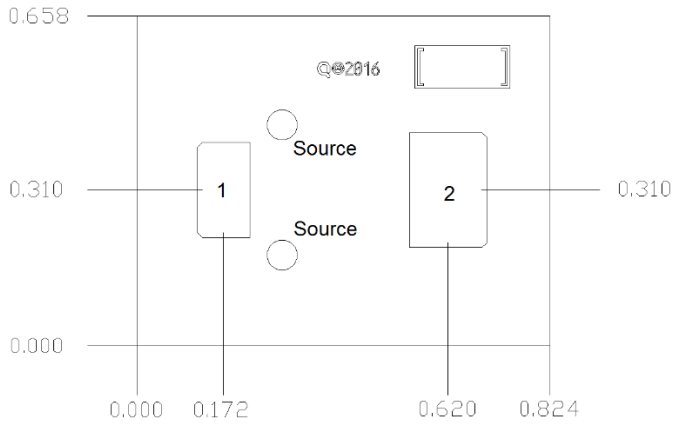

1. Units: millimeters
2. Thickness: 0.100 mm
3. Die xy size tolerance: ± 0.050 mm

Bond Pads

| Pad No. | Description | Dimensions |
|--------------|-----------------|---------------|
| 1 | Gate | 0.154 x 0.115 |
| 2 | Drain | 0.154 x 0.230 |
| Die Backside | Source / Ground | 0.662 x 0.824 |

Model

A model is available for download from Modelithics (at <http://www.modelithics.com/mvp/Triqunt&tab=3>) by approved Qorvo customers. The model is compatible with the industry's most popular design software including Agilent ADS and National Instruments/AWR applications. Once on the Modelithics web page, the user will need to register for a free license before being granted the download.

Assembly Notes

Component placement and adhesive attachment assembly notes:

- Vacuum pencils and/or vacuum collets are the preferred method of pick up.
- Air bridges must be avoided during placement.
- The force impact is critical during auto placement.
- Organic attachment (i.e. epoxy) not recommended.

Reflow process assembly notes:

- Use AuSn (80/20) solder and limit exposure to temperatures above 300°C to 3-4 minutes, maximum.
- An alloy station or conveyor furnace with reducing atmosphere should be used.
- Do not use any kind of flux.
- Coefficient of thermal expansion matching is critical for long-term reliability.
- Devices must be stored in a dry nitrogen atmosphere.

Interconnect process assembly notes:

- Ball bonding is the preferred interconnect technique, except where noted on the assembly diagram.
- Force, time, and ultrasonics are critical bonding parameters.
- Aluminum wire should not be used.
- Devices with small pad sizes should be bonded with 0.0007-inch wire.

Disclaimer

GaN/SiC devices are susceptible to damage from Electrostatic Discharge. Proper precautions should be observed during handling, assembly and test.

Bias Procedure

Bias-Up Procedure

1. Set V_G to -5 V.
2. Apply $+28$ V to V_D .
3. Slowly adjust V_G until I_D is set to 125 mA.
4. Apply RF.

Bias-Down Procedure

1. Turn off RF signal.
2. Turn off V_D .
3. Wait two (2) seconds to allow drain capacitor to discharge.
4. Turn off V_G .

Handling Precautions

| Parameter | Rating | Standard |
|----------------------------------|--------|---------------------------------|
| ESD – Human Body Model (HBM) | TBD | ANSI/ESDA/JEDEC Standard JS-001 |
| ESD – Charged Device Model (CDM) | N/A | ANSI/ESDA/JEDEC Standard JS-002 |
| MSL – Moisture Sensitivity Level | N/A | IPC/JEDEC Standard J-STD-020 |



Solderability

Compatible with gold/tin (320°C maximum reflow temperature) soldering processes.

RoHS Compliance

This part is compliant with 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- PFOS Free
- SVHC Free



Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Web: www.qorvo.com

Tel: 1-844-890-8163

Email: customer.support@qorvo.com

Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2019 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Qorvo:](#)

[TGF2023-2-01](#)