

5.8 to 20.0GHz – Drop in Isolator


Design Features

- ◆ Can be dual junction even three for high isolation.
- ◆ Military, space and commercial applications.
- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.

RF Characteristics

Model Number	Freq. Range (GHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYDI815A58T62	5.8 ~ 6.2	0.5	20	1.25	30	10	TAB	-40 ~ +85
UIYDI815A6T8	6.0 ~ 8.0	0.6	18	1.3	30	10	TAB	-40 ~ +85
UIYDI815A77T88	7.7 ~ 8.8	0.4	20	1.25	30	10	TAB	-40 ~ +85
UIYDI815A71T95	7.1 ~ 9.5	0.6	18	1.3	30	10	TAB	-40 ~ +85
UIYDI815A79T84	7.9 ~ 8.4	0.3	23	1.2	30	10	TAB	-40 ~ +85
UIYDI815A8T12	8.0 ~ 12.0	0.5	18	1.3	30	10	TAB	-40 ~ +85
UIYDI815A85T95	8.5 ~ 9.5	0.35	23	1.2	30	10	TAB	-40 ~ +85
UIYDI815A9T10	9.0 ~ 10.0	0.35	23	1.2	30	10	TAB	-40 ~ +85
UIYDI815A93T10	9.3 ~ 10.0	0.35	23	1.2	30	10	TAB	-40 ~ +85
UIYDI815A10T11	10.0 ~ 11.0	0.3	23	1.2	30	10	TAB	-40 ~ +85
UIYDI815A10T13	10.0 ~ 13.0	0.5	20	1.25	30	10	TAB	-40 ~ +85
UIYDI815A10T15	10.0 ~ 15.0	0.5	18	1.35	30	10	TAB	-40 ~ +85
UIYDI815A115T185	11.5 ~ 18.5	0.7	16	1.45	30	10	TAB	-40 ~ +85
UIYDI815A1375T145	13.75 ~ 14.5	0.3	23	1.2	30	10	TAB	-40 ~ +85
UIYDI815A138T178	13.8 ~ 17.8	0.5	18	1.3	30	10	TAB	-40 ~ +85
UIYDI815A155T165	15.5 ~ 16.5	0.5	20	1.25	30	10	TAB	-40 ~ +85
UIYDI815A16T18	16.0 ~ 18.0	0.6	20	1.25	30	10	TAB	-40 ~ +85

Mechanical Drawing

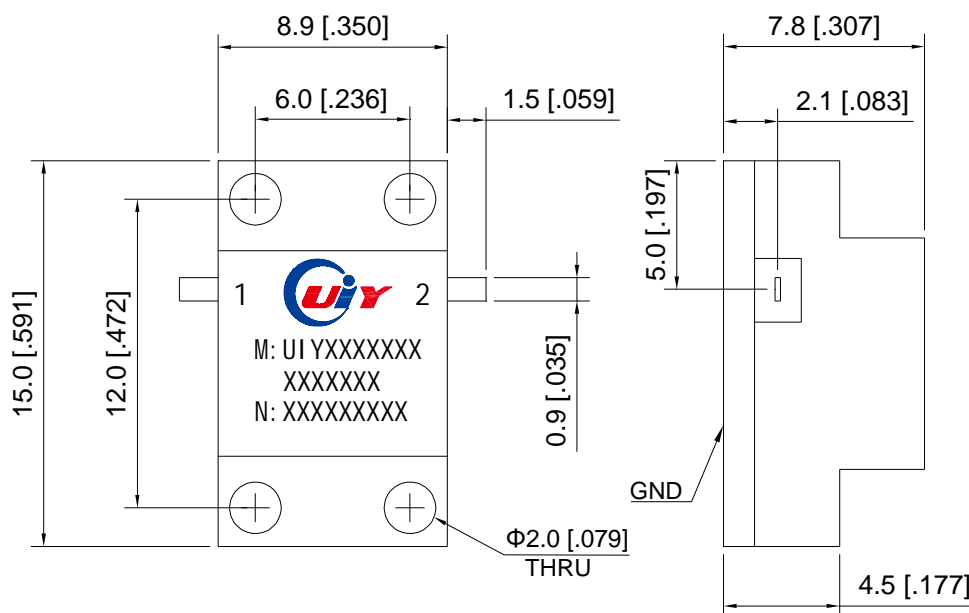

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5