

### Product Description


Qorvo's TGL2201 is a wideband dual stage limiter fabricated on Qorvo's proven GaAs VPIN process. Operating from 2 to 25 GHz, the TGL2201 has < 1dB of insertion loss under small signal operation and flat leakage of < 18 dBm under large signal.

The TGL2201 is suitable for a variety of wideband systems such as LNA/receiver protection in radars, phased arrays and jammers.

Lead-free and RoHS compliant.



### Functional Block Diagram

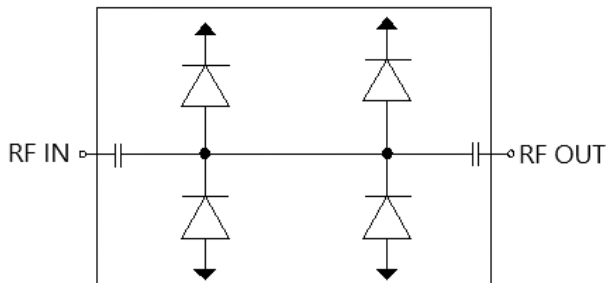

### Product Features

- Frequency Range: 2 – 25 GHz
- Insertion Loss: < 1 dB
- Return Loss: > 12 dB
- Input Power CW Survivability up to 5 W
- Flat Leakage: < 18 dBm
- Passive (no DC bias required)
- Integrated DC Block on the output
- Recovery Time: < 115 nS
- Die Size: 1.1 x 1.1 x 0.1 mm

*Performance is typical across frequency. Please reference electrical specification table and data plots for more details.*

### Applications

- Receive Chain Protection
- Commercial and Military Radar

### Ordering Information

Part No.	Description
TGL2201	2 – 25 GHz VPIN Limiter Waffle Pack, 100 pieces



## Absolute Maximum Ratings

Parameter	Rating
Incident Power, CW, 50 $\Omega$ , 25 °C	5 W
Mounting Temperature (30 seconds)	320 °C
Storage Temperature	-55 to 150 °C

Operation of this device outside the parameter ranges given above may cause permanent damage. These are stress ratings only, and functional operation of the device at these conditions is not implied.

## Recommended Operating Conditions

Parameter	Min	Typ	Max	Units
Operating Temperature Range	-55	+25	+85	°C
Passive – No Bias				

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.



## Electrical Specifications

Test conditions, unless otherwise noted: 25 °C


Parameter	Min	Typ.	Max	Units
Operational Frequency Range	2	–	25	GHz
Insertion Loss		< 1		dB
Input Return Loss	12	–		dB
Output Return Loss	12	–		dB
Flat Leakage Power @ $P_{IN} > 27$ dBm		< 18		dBm
Pulse Recovery Time		< 115		nS

### Performance Plots

Test conditions unless otherwise noted: Temp. = 25 °C

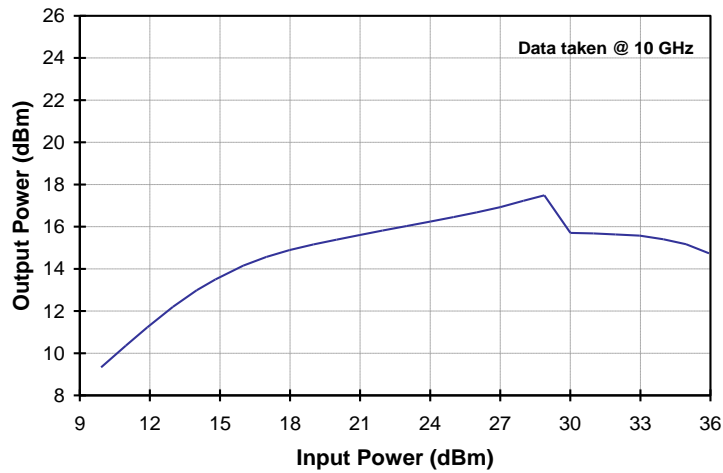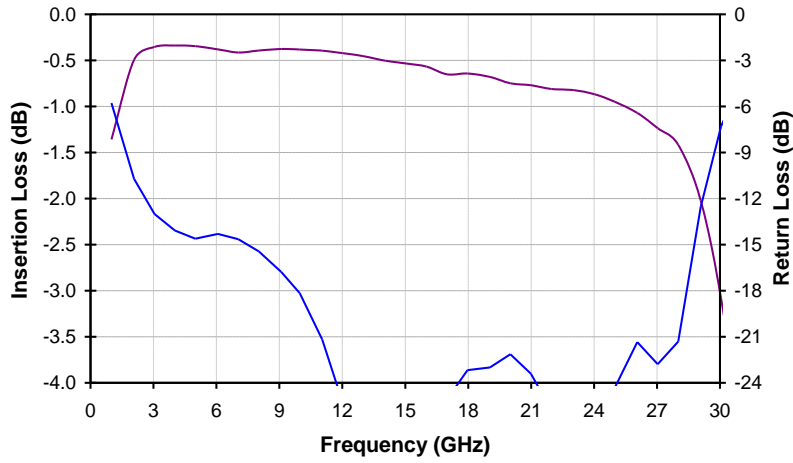


### Assembly Drawing

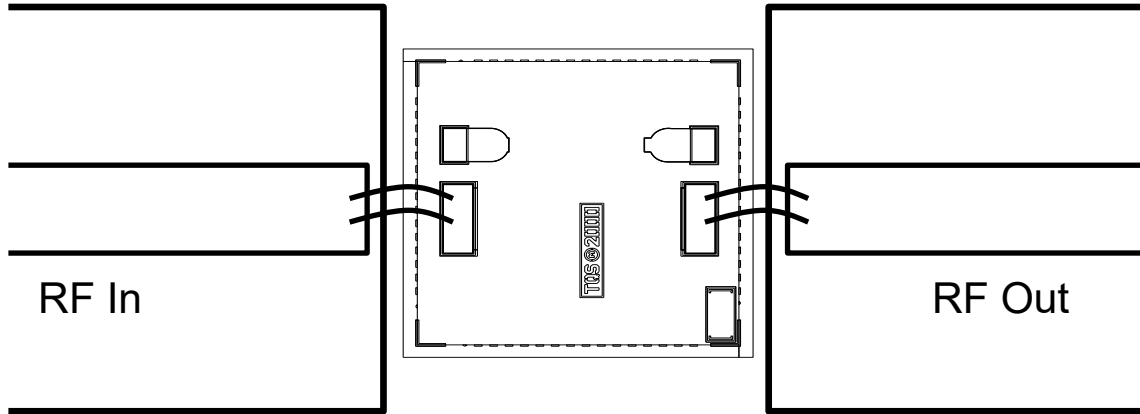

Note: RF Input and RF Output ports are not interchangeable.

### Mechanical Drawing and Bond Pad Description

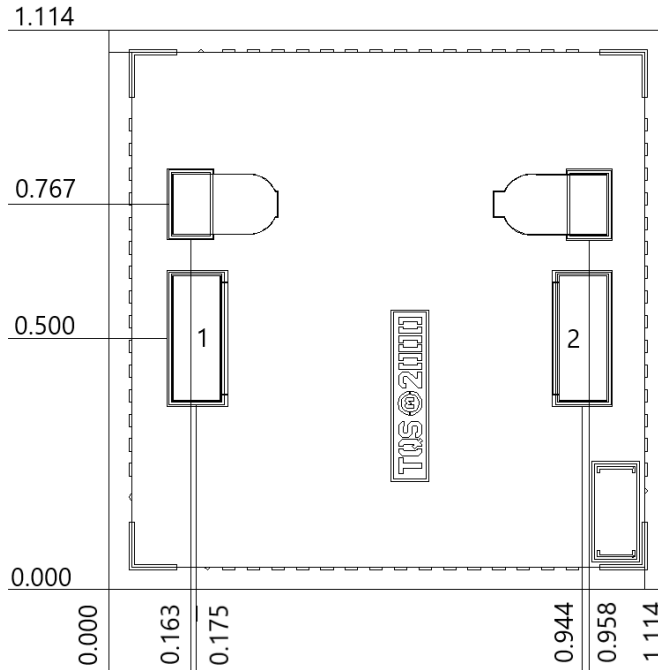

Unit: millimeters  
 Thickness: 0.10  
 Die x, y size tolerance:  $\pm 0.050$   
 Chip edge to bond pad dimensions are shown to center of pad  
 Ground is backside of die

Pad No.	Symbol	Description	Pad Size (mm x mm)
1	RF Input	RF Input, 50 $\Omega$ , DC Blocked	0.096 x 0.250
2	RF Output	RF Output, 50 $\Omega$ , DC Blocked.	0.096 x 0.250

## Assembly Notes

---

Component placement and adhesive attachment assembly notes:

- Vacuum pencils and/or vacuum collets are the preferred method of pick up.
- Air bridges must be avoided during placement.
- The force impact is critical during auto placement.

Reflow process assembly notes:

- Use AuSn (80/20) solder and limit exposure to temperatures above 300 °C to 3–4 minutes, maximum.
- An alloy station or conveyor furnace with reducing atmosphere should be used.
- Do not use any kind of flux.
- Coefficient of thermal expansion matching is critical for long-term reliability.
- Devices must be stored in a dry nitrogen atmosphere.

Interconnect process assembly notes:

- Thermosonic ball bonding is the preferred interconnect technique.
- Force, time, and ultrasonic are critical parameters.
- Aluminum wire should not be used.
- Devices with small pad sizes should be bonded with 0.0007-inch wire.

## Handling Precautions

Parameter	Rating	Standard	 Caution! ESD-Sensitive Device
ESD – Human Body Model (HBM)	Class 1B	ESDA / JEDEC JS-001	

## Solderability

Use only AuSn (80/20) solder and limit exposure to temperatures above 300 °C to 3 – 4 minutes, maximum.

## RoHS Compliance

This product is compliant with the 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment), as amended by Directive 2015/863/EU. This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C<sub>15</sub>H<sub>12</sub>Br<sub>4</sub>O<sub>2</sub>) Free
- PFOS Free
- SVHC Free

## Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

**Tel:** 1-844-890-8163

**Web:** [www.qorvo.com](http://www.qorvo.com)

**Email:** [customer.support@qorvo.com](mailto:customer.support@qorvo.com)

## Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2021 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.