

Documnt Number: DDS-13-010

DRV060-CV-R03-GAD CVBS Drive Board  
User manual  
Ver 1.0

**For Products:**

- SVGA060SC — Full Color
- SVGA060SW — Monochrome White
- SVGA060SG — Monochrome Green

Yunnan North OLiGhTEK Opto-Electronic Technology Co., LTD

May 14, 2013

## Record of Revision


Revision	Revise Date	Page	Content
Ver 1.0	May 14,2013		Initial release .

# DRV060-CV-R03-GAD CVBS Drive Board

## User manual

### Features

- **Multi-format composite video input(default is PAL)**
- **Low power consumption**
- **Industrial temperature grade (-40°C~+65°C)**
- **Custom Re-configurable**

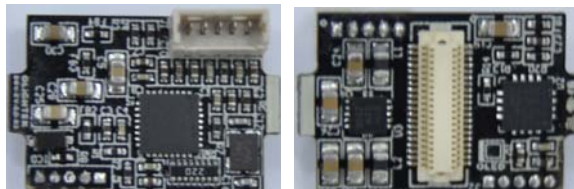

### General description

DRV060-CV-R03-GAD is an analog composite video input driver board for SVGA060 OLED microdisplay. The low power consumption decoder can automatically detects and converts standard analog baseband television signals compatible with worldwide NTSC, PAL, and SECAM standards into digital YCbCr 4:2:2 component video data compatible with the 8-bit ITU-R BT.656 interface standard. Default driver board setting is PAL input, and the resolution is 768x576, support mono or color signal.

It allow user to adjust the brightness, contrast of the Display by serial communication interface . One CMOS standard serial communication interface allow user to configure all register of the decoder and display. So user can re-configure the driver board flexible.

Low-noise, low-dropout DC/DC convertor can support 5V input voltage.

### Power and consumption

Input voltage	DC 5V ±0.2V
Typical power consumption	500mW (Include display)

### Input video signal

Video signal	Composite video
Voltage level	0~1.0 Vpp
Input resistor	75Ω
Output (PAL)	768 × 576

### Interface (3.3V CMOS standard)


I/O definition (active low)	Function
TxD/RxD	CMOS 3.3V RS232 interface
COMS Setting	9600/N/8/1

### Mechanic dimension

Dimension (L × W)	20mm × 15mm
Refer to Mechanical characteristics	

### Interface and pin definition

No.	Name	Function	Voltage level
1	CV+	Video Input +	0~1.0 Vpp
2	Gnd	Video Input GND	0V
3	RxD	RS232 Received Pin	0/3.3V
4	GND	Power Gnd	0V
5	Vin	Power Input	5V

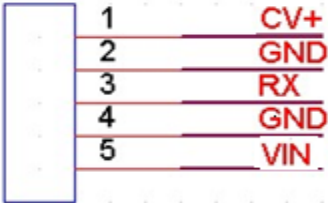


5Pin Connector

Note: 1. It remarks the first pin as 1 in the Connector. Which is 53047-0510, it is made by Molex.

### Communication description

Communication interface support master controller to read/write the register value of Display, Decoder and EEPROM. The change of the Decoder and Display will effect immediately, but when power down or reset, it will lost. The change of the EEPROM is equal to modify the default setting, will effect after power up in next time or reset. We have to make a board which used for voltage transform like below max3232 :

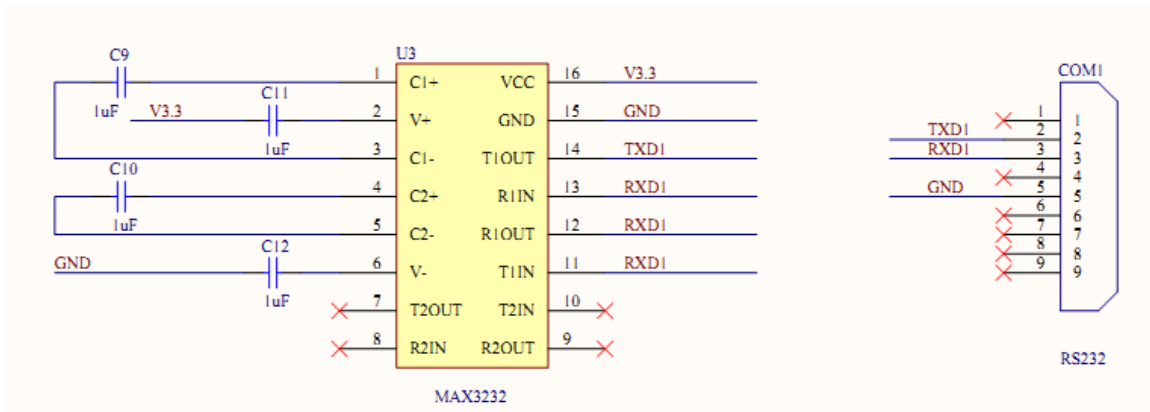

**Note:** RxD and TxD pin are work in COMS 3.3V standard, it cannot connect to PC RS232 port directly.

Because this board only have RxD pin ,it could write the register and can't read the register .

Every command must be sending in 600ms and total bytes must be less than 64 bytes, otherwise, will receive the error code.

**Common Command**

- (1) Modify the brightness of display      02 24 03 00 XX 03

(XX is the value which we need to set, Which range is 00H~FFH, and the 00H is more dark than FFH.)

Note: After send this command, the brightness change of the Display will effect immediately, it save the setting in EEPROM at the same time.

- (2) Open temperature compensate(TC)      02 43 03 01 00 03

Close temperature compensate (TC)      02 43 03 00 00 03

Note: The setting will effect immediately, but when power down or reset, it will lost. If you want to save the setting of TC, please modify the register DEH and D0H,D0H is the checksum register.)

- (3) Resume the factory setting      02 80 03 00 00 03

- (4) Reset      02 55 03 00 00 03

**Communication mnemonic symbol**

Mnemonic	Code(Hex)	Signification	Error Code		Signification
			Mnemonic	Code(Hex)	
STX	02h	Start symbol	Err_Head	F0h	Start symbol error
ETX	03h	End symbol	Err_End	F1h	End symbol error
ACK	06h	ACK symbol	Err_CMD	F2h	CMD symbol error
NAK	07h	NAK symbol	Err_DateLen	F3h	Data Length error
CMD	00h	Read soft version	Err_Frame	F4h	Frame error
	11h	Read Display	Err_FIFO	F5h	FIFO overflow
	12h	Read Decoder	Err_RxProc	F6h	CMD process error
	13h	Read EEPROM	Err_TimeOut	F7h	CMD timeout
	21h	Write Display	Err_Waiting	F8h	CMD not finished
	22h	Write Decoder	Err_Unknow	FFh	Unknown CMD
	23h	Write EEPROM			
	24h	Write Brightness of display			
	30h	Switch PAL to NTSC			
	31h	Switch NTSC to PAL			
	41h	Reset display			
	42h	Reset decoder			
	43h	Open/Close temperature compensate			
	55h	Reset			
	80h	Resume factory setting			

**Communication command formatting**

Send: STX + CMD + DataLen + Data + ETX  
 (A dashed arrow points from the DataLen field to the Data field.)

Response: STX + CMD + DataLen + ACK/NAK + Data + ETX  
 (A dashed arrow points from the DataLen field to the Data field.)

**Command usage**

1. Write Command (6 ≤ Total Bytes ≤ 64)

Send:

STX	CMD	Length	Add0	Data0	.....	Addn	Datan	ETX
02	21/22/23	03~3C	00~FF	00~FF	.....	00~FF	00~FF	03

Succeed Response:

STX	CMD	Length	ACK	ETX
02	21/22/23	02	06	03

Error Response:

STX	ErrCode	Length	NAK	ETX
02	F0~FF	02	07	03

Write command example:

Write Display register (01H) = 41H, (19H) = A0H: 02 21 05 01 41 19 A0 03

### MECHANICAL CHARACTERISTICS


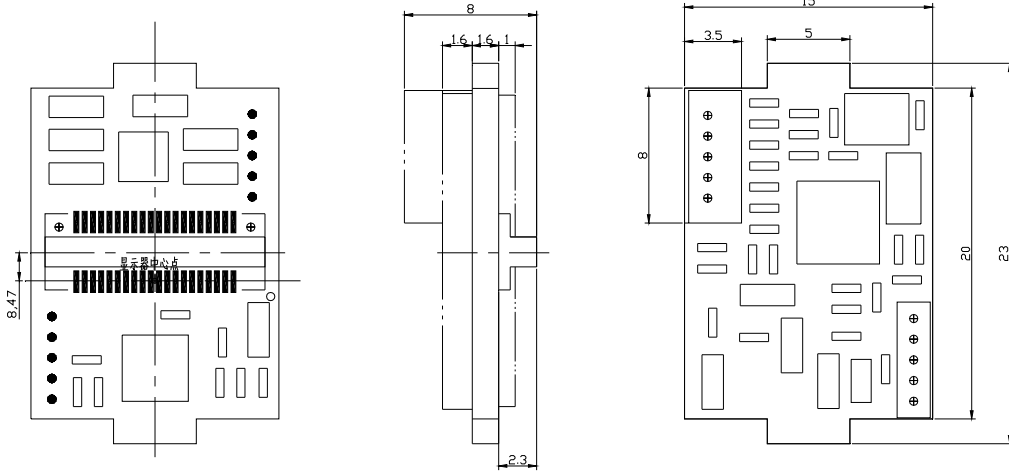


Diagram of mechanism

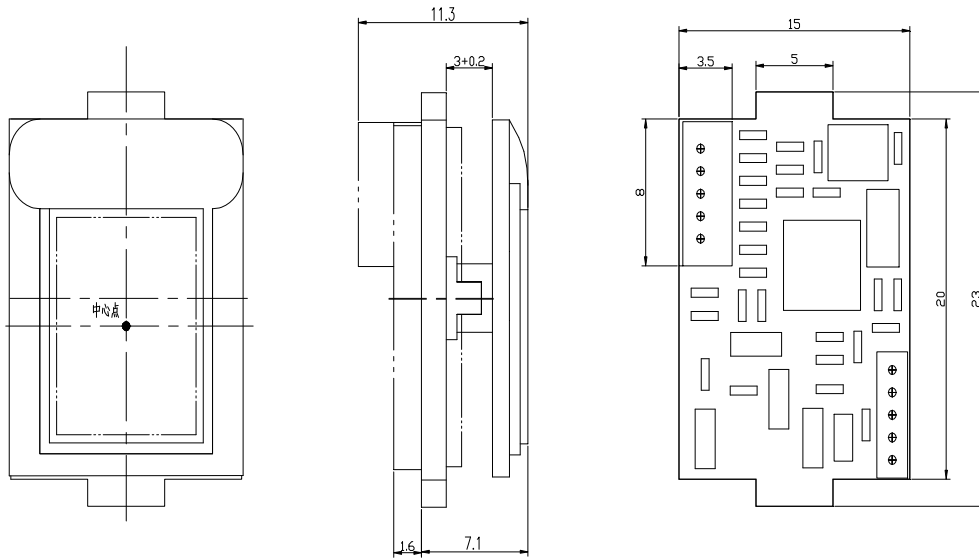

Installation diagram with OLED