

Ultra High Dynamic Range **Monolithic Amplifier**

PHA-13HLN+

50Ω 1MHz to 1 GHz

The Big Deal

- Ultra-High IP3, +43 dBm typ.
- Medium Power, +28.7dBm typ.
- Excellent Noise Figure, 1.1 dB typ.



SOT-89 PACKAGE

Product Overview

PHA-13HLN+ (RoHS compliant) is an advanced wideband amplifier fabricated using E-PHEMT technology and offers extremely high dynamic range over a broad frequency range and with low noise figure. In addition, the PHA-13HLN+ has good input and output return loss over a broad frequency range. PHA-13HLN+ is enclosed in a SOT-89 package and has very good thermal performance.

Key Features

Feature	Advantages
Broad Band: 1MHz to 1GHz	Broadband covering primary wireless communications bands: VHF, UHF, Cellular
Extremely High IP3 38.4 dBm typical at 1MHz 43 dBm typical at 0.5GHz	The PHA-13HLN+ matches industry leading IP3 performance relative to device size and power consumption. The combination of the design and E-PHEMT Structure provides enhanced linearity over a broad frequency range as evidence in the IP3 being approximately 15 dB above the P1dB point. This feature makes this amplifier ideal for use in: <ul style="list-style-type: none">• Driver amplifiers for complex waveform up converter paths• Drivers in linearized transmit systems• Secondary amplifiers in ultra-High Dynamic range receivers
Low Noise Figure 1.1 dB at 0.5 GHz	Enables lower system noise figure performance
High P1dB 28.7 dBm at 500 MHz	High P1dB, High OIP3, Low NF results in a very dynamic range preventing amplifier saturation under strong interfering signals. It can also be used to drive mixers requiring high drive



Ultra High Dynamic Range Monolithic Amplifier

1MHz to 1 GHz

Product Features

- High IP3, 43 dBm typ. at 0.5GHz
- Gain, 22.7 dB typ. at 0.5 GHz
- High Pout, P1dB 28.7 dBm typ. at 0.5GHz
- Low noise figure, 1.1 dB at 0.5 GHz



Generic photo used for illustration purposes only

CASE STYLE: DF782

PHA-13HLN+

Typical Applications

- Base station infrastructure
- CATV
- Cellular



+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

General Description

PHA-13HLN+ (RoHS compliant) is an advanced wideband amplifier fabricated using E-PHEMT technology and offers extremely high dynamic range over a broad frequency range and with low noise figure. In addition, the PHA-13HLN+ has good input and output return loss over a broad frequency range. PHA-13HLN+ is enclosed in a SOT-89 package and has very good thermal performance.

simplified schematic and pin description

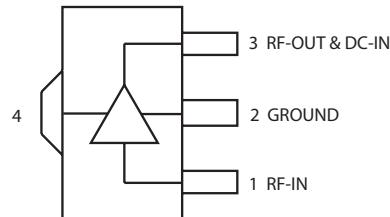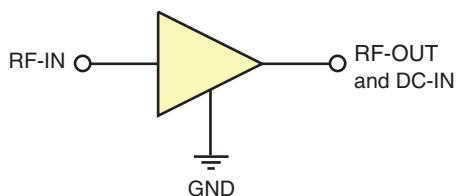

Function	Pin Number	Description
RF IN	1	RF Input
RF-OUT and DC-IN	3	RF Output and DC Bias
GND	2,4	Connections to ground.

Electrical Specifications¹ at 25°C, 50Ω, unless noted

Parameter	Condition (MHz)	Vd=8V ¹			Units
		Min.	Typ.	Max.	
Frequency Range		1	22.4	25.0	MHz
Gain	20	—	24.3	—	dB
	250	—	23.0	—	
	500	20.4	22.7	25.0	
	1000	—	20.4	—	
	1		10.8		
Input Return Loss	20		15.8		dB
	250		16.7		
	500		17.5		
	1000		10.5		
	1		11.2		
Output Return Loss	20		18.8		dB
	250		17.7		
	500		29.4		
	1000		9.0		
Reverse isolation	500		26.3		dB
Output Power @ 1 dB compression	1		26.2		dBm
	20		27.3		
	250		28.4		
	500		28.7		
	1000		27.4		
Output IP3 ²	1	—	38.4	—	dBm
	20	—	41.7	—	
	250	—	43.5	—	
	500	40.0	43.0	—	
	1000	—	42.2	—	
Noise Figure	1		3.0		dB
	20		1.2		
	250		1.1		
	500		1.1		
	1000		1.4		
Device Operating Voltage			8.0		V
Device Operating Current		—	234.1	251	mA
Device Current Variation vs. Temperature ³			-100.6		µA/°C
Device Current Variation vs Voltage			0.0155		mA/mV
Thermal Resistance, junction-to-ground lead Junction-to-ground lead at 85°C stage temperature			23.3		°C/W

1. Measured on Mini-Circuits Characterization test board TB-969-13HLN+. See Characterization Test Circuit (Fig. 1)

2. Tested at Pout= 0 dBm / tone.

3. (Current at 85°C — Current at -45°C)/130

Absolute Maximum Ratings⁴

Parameter	Ratings
Operating Temperature (ground lead)	-40°C to 95°C
Storage Temperature	-65°C to 150°C
Power Dissipation	3.3 W ⁵
Input Power (CW)	+21 dBm (5 minutes max) ⁶ +10 dBm (continuous) for 1-10 MHz +11 dBm (continuous) for 10-1000 MHz
DC Voltage on Pin 3	10V

4. Permanent damage may occur if any of these limits are exceeded.


Electrical maximum ratings are not intended for continuous normal operation.

5. up to 85°C, derate linearly to 2.5 W at 95°C.

6. up to 85°C, derate linearly to 18 dBm at 95°C.



Characterization Test / Recommended Application Circuit

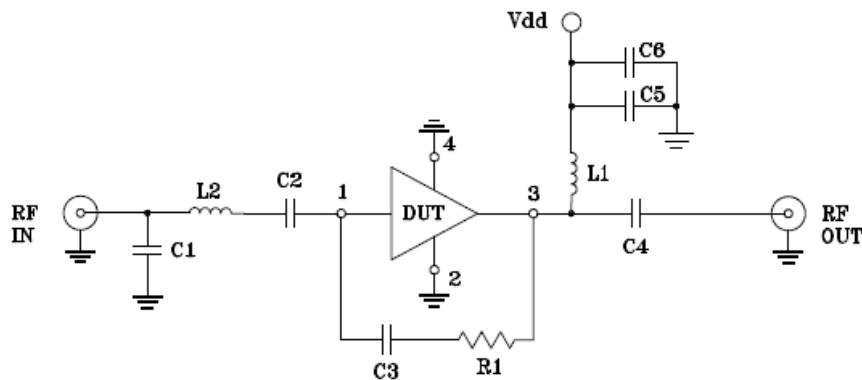


Components	Size	Value	Manufacturer	P/N
C1	0402	1.5 pF	Murata	GRM1555C1H1R5CZ01
C2	0603	2.2 uF		GRM188R61C225KE15
C3	0402	0.1uF		GRM155R71C104KA88
C4	0603	2.2 uF		GRM188R61C225KE15
C5	0402	1000 pF		GRM1555C1H102JA01
C6	0805	10 uF		GRM21BR61C106KE15
L1	1210	15 uH		LOH32DN150K53L
L2	0603	5.1 nH		0603CS-5N1XJL
R1	0402	1500 Omega		RK73H1ET1501F

Fig 1. Block Diagram of Test Circuit used for characterization. (DUT soldered on Mini-Circuits Characterization test board TB-969-13HLN+) Gain, Return loss, Output power at 1dB compression (P1dB), output IP3 (OIP3) and noise figure measured using Agilent's N5242A PNA-X microwave network analyzer.

Conditions:

1. Gain and Return loss: Pin= -25dBm
2. Output IP3 (OIP3): Two tones, spaced 0.5 MHz apart, 0 dBm/ tone at output.

Product Marking

Marking may contain other features or characters for internal lot control

Additional Detailed Technical Information

additional information is available on our dash board. To access this information [click here](#)


Performance Data	Data Table
	Swept Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
Case Style	DF782 (SOT 89) Plastic package, exposed paddle lead finish: Matt-Tin
Tape & Reel Standard quantities available on reel	F55 7" reels with 20, 50, 100, 200, 500 or 1K devices
Suggested Layout for PCB Design	PL-523
Evaluation Board	TB-969-13HLN+
Environmental Ratings	ENV08T9

ESD Rating

Human Body Model (HBM): Class 1B (Pass 500 V) in accordance with ANSI/ESD STM 5.1 - 2001

MSL Rating

Moisture Sensitivity: MSL1 in accordance with IPC/JEDEC J-STD-020D

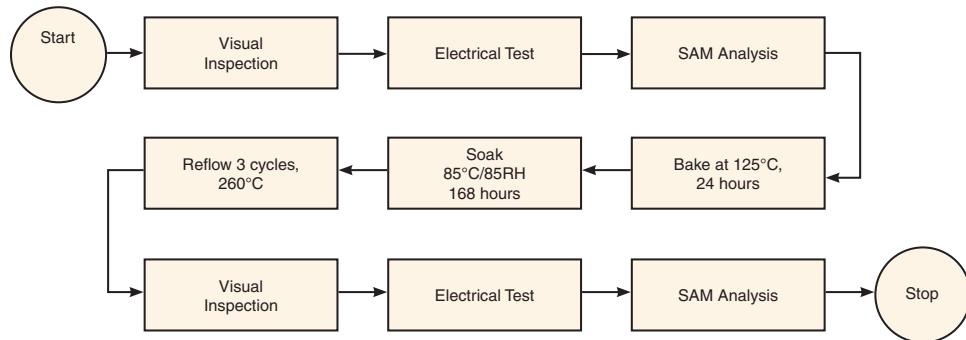MSL Test Flow Chart**Additional Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

*Typical Performance Data***NOTE: Use PDF Bookmarks to view DATA at required conditions****Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 8.00V, Id = 238.6mA @ Temperature = +25°C

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
1	24.97	29.26	11.12	11.36	1.07	0.54	43.13	26.04	2.87
3	25.28	28.80	14.51	23.20	1.06	0.57	43.39	26.30	1.84
5	25.24	28.59	15.09	37.21	1.05	0.57	43.52	26.50	1.49
7	25.15	28.36	15.28	32.70	1.04	0.56	43.54	26.43	1.52
9	25.03	28.12	15.40	26.52	1.03	0.55	43.68	26.69	1.35
10	24.96	27.99	15.46	24.99	1.03	0.54	43.84	26.67	1.29
20	24.32	27.03	15.66	18.71	1.01	0.50	43.63	27.35	1.26
30	23.90	26.52	15.88	17.14	1.01	0.46	44.41	27.81	1.22
40	23.67	26.28	16.02	16.47	1.02	0.45	44.60	27.92	1.11
50	23.53	26.14	16.09	16.24	1.02	0.44	44.46	28.03	1.10
60	23.43	26.05	16.15	16.10	1.03	0.43	44.51	28.15	1.13
70	23.37	26.00	16.14	16.00	1.03	0.43	45.52	28.16	1.09
80	23.33	25.98	16.25	16.00	1.03	0.43	44.90	28.15	1.08
90	23.29	25.96	16.27	16.00	1.03	0.43	45.41	28.23	1.07
100	23.27	25.95	16.33	16.09	1.03	0.43	45.47	28.23	1.09
150	23.20	25.93	16.55	16.58	1.04	0.44	45.59	28.42	1.10
200	23.15	25.96	16.82	17.39	1.04	0.46	45.52	28.43	1.07
250	23.09	26.00	17.15	18.41	1.05	0.48	44.98	28.52	1.02
300	23.03	26.05	17.48	20.08	1.05	0.50	45.79	28.76	1.04
350	22.97	26.12	17.78	22.35	1.06	0.52	45.52	28.67	1.06
400	22.89	26.21	18.14	25.60	1.06	0.54	45.26	28.89	1.08
450	22.78	26.32	18.31	30.40	1.07	0.57	44.89	28.79	1.09
500	22.64	26.48	18.35	29.28	1.08	0.61	44.15	28.87	1.14
550	22.36	26.78	17.64	23.27	1.11	0.66	44.60	28.68	1.13
600	22.23	27.30	15.25	22.28	1.16	0.75	44.48	28.60	1.15
650	22.09	27.12	15.31	25.68	1.14	0.72	45.14	28.87	1.13
700	22.11	27.15	15.69	20.08	1.14	0.71	45.40	28.86	1.14
750	21.97	27.35	15.56	16.87	1.15	0.72	45.32	28.77	1.17
800	21.76	27.63	15.08	14.65	1.17	0.74	44.99	28.56	1.19
850	21.47	27.99	14.38	12.90	1.20	0.76	44.83	28.41	1.21
900	21.08	28.47	13.48	11.41	1.25	0.79	44.34	27.99	1.27
950	20.51	29.15	12.33	10.10	1.33	0.82	43.25	27.34	1.27
1000	19.64	30.16	10.86	9.00	1.48	0.87	41.51	26.46	1.30
1050	18.27	31.71	9.19	8.30	1.80	0.94	40.54	25.41	1.36
1100	16.71	33.41	7.59	8.58	2.36	1.03	40.36	25.66	1.47
1150	16.85	33.15	6.66	10.83	2.34	1.12	43.50	26.64	1.55
1200	18.23	31.71	6.46	16.08	1.88	1.16	45.12	27.62	1.64



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
 The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS



Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 7.60V, Id = 226.05mA @ Temperature = +25°C

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
1	24.96	29.26	11.07	11.38	1.07	0.55	43.10	25.53	--
3	25.26	28.80	14.41	23.26	1.06	0.57	43.46	25.78	--
5	25.22	28.59	14.97	37.86	1.05	0.57	43.53	25.85	--
7	25.13	28.36	15.16	32.77	1.04	0.56	43.64	26.06	--
9	25.01	28.12	15.31	26.50	1.03	0.55	43.77	26.05	--
10	24.94	27.99	15.41	24.97	1.03	0.54	43.90	26.02	1.25
20	24.31	27.02	15.65	18.68	1.01	0.49	44.32	26.89	1.22
30	23.88	26.51	15.89	17.12	1.01	0.46	45.14	27.37	1.18
40	23.65	26.27	16.07	16.43	1.02	0.45	45.96	27.49	1.07
50	23.52	26.12	16.19	16.22	1.02	0.44	45.11	27.60	1.07
60	23.42	26.05	16.24	16.08	1.03	0.43	44.75	27.73	1.09
70	23.36	26.00	16.21	15.96	1.03	0.43	45.60	27.72	1.05
80	23.31	25.97	16.27	15.96	1.03	0.43	45.45	27.80	1.06
90	23.28	25.94	16.33	15.97	1.03	0.43	45.41	27.80	1.05
100	23.26	25.93	16.40	16.05	1.03	0.43	45.66	27.78	1.07
150	23.19	25.92	16.65	16.54	1.04	0.44	45.38	27.98	1.07
200	23.14	25.94	16.92	17.33	1.04	0.46	45.30	28.08	1.05
250	23.08	25.98	17.24	18.34	1.05	0.47	44.94	28.07	0.99
300	23.02	26.03	17.53	19.96	1.05	0.50	45.92	28.32	1.02
350	22.96	26.10	17.87	22.18	1.05	0.52	45.19	28.23	1.03
400	22.87	26.19	18.25	25.24	1.06	0.54	45.13	28.46	1.04
450	22.77	26.30	18.37	29.27	1.07	0.57	45.06	28.44	1.05
500	22.62	26.46	18.40	28.25	1.08	0.61	44.24	28.42	1.06
550	22.34	26.76	17.67	22.86	1.11	0.66	44.88	28.32	1.07
600	22.21	27.28	15.28	21.80	1.16	0.75	45.02	28.19	1.09
650	22.08	27.10	15.35	25.29	1.14	0.72	45.58	28.44	1.11
700	22.10	27.12	15.73	20.06	1.13	0.71	46.05	28.44	1.10
750	21.96	27.32	15.60	16.89	1.15	0.72	45.93	28.46	1.15
800	21.75	27.59	15.12	14.67	1.17	0.74	45.83	28.26	1.17
850	21.46	27.95	14.42	12.93	1.20	0.76	45.64	28.03	1.19
900	21.07	28.43	13.53	11.43	1.25	0.79	45.32	27.63	1.24
950	20.51	29.09	12.38	10.12	1.32	0.82	43.99	27.13	1.23
1000	19.64	30.09	10.90	9.01	1.47	0.87	42.06	26.27	1.31
1050	18.29	31.63	9.22	8.29	1.78	0.94	41.29	25.21	1.34
1100	16.75	33.31	7.60	8.53	2.31	1.03	41.71	25.44	1.41
1150	16.88	33.05	6.68	10.72	2.30	1.12	44.01	26.37	1.49
1200	18.24	31.62	6.47	15.79	1.85	1.15	44.52	27.17	1.57

*Typical Performance Data***Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 8.40V, Id = 250.07mA @ Temperature = +25°C

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
1	24.97	29.26	11.21	11.35	1.07	0.54	42.64	26.53	--
3	25.28	28.80	14.66	23.16	1.07	0.57	42.99	26.80	--
5	25.23	28.59	15.21	36.45	1.06	0.56	43.07	27.11	--
7	25.14	28.36	15.40	32.60	1.05	0.56	43.18	27.06	--
9	25.02	28.12	15.51	26.58	1.04	0.55	43.25	27.05	--
10	24.95	27.99	15.55	25.02	1.03	0.54	43.33	27.03	1.38
20	24.31	27.02	15.68	18.79	1.01	0.50	44.85	27.80	1.31
30	23.89	26.53	15.85	17.22	1.01	0.47	44.04	28.15	1.26
40	23.65	26.29	16.02	16.55	1.02	0.45	45.07	28.34	1.17
50	23.52	26.15	16.10	16.34	1.02	0.44	44.45	28.44	1.13
60	23.42	26.06	16.08	16.20	1.03	0.44	44.41	28.49	1.16
70	23.36	26.01	16.12	16.08	1.03	0.43	45.31	28.56	1.12
80	23.32	25.99	16.13	16.08	1.03	0.43	45.03	28.57	1.14
90	23.28	25.97	16.17	16.09	1.03	0.44	45.48	28.57	1.11
100	23.26	25.96	16.27	16.19	1.03	0.44	45.39	28.64	1.14
150	23.19	25.95	16.49	16.68	1.04	0.45	45.42	28.83	1.19
200	23.14	25.97	16.75	17.50	1.04	0.46	45.15	28.85	1.11
250	23.08	26.01	17.07	18.54	1.05	0.48	44.81	28.86	1.06
300	23.02	26.06	17.36	20.25	1.05	0.50	45.44	29.09	1.12
350	22.96	26.13	17.69	22.61	1.06	0.52	45.17	29.10	1.10
400	22.88	26.22	18.04	26.11	1.06	0.55	44.88	29.24	1.11
450	22.77	26.33	18.16	31.75	1.07	0.58	44.55	29.22	1.15
500	22.63	26.50	18.21	30.10	1.08	0.61	43.76	29.20	1.16
550	22.34	26.80	17.52	23.57	1.11	0.66	43.99	29.10	1.14
600	22.21	27.33	15.16	22.78	1.16	0.76	43.85	28.90	1.15
650	22.08	27.15	15.22	25.73	1.14	0.72	44.40	29.18	1.17
700	22.10	27.18	15.58	19.96	1.14	0.71	44.57	29.16	1.17
750	21.96	27.38	15.45	16.76	1.15	0.72	44.28	29.17	1.25
800	21.74	27.66	14.96	14.57	1.17	0.74	44.03	28.93	1.23
850	21.45	28.03	14.26	12.83	1.21	0.76	43.78	28.63	1.26
900	21.05	28.53	13.37	11.35	1.26	0.79	43.28	28.18	1.30
950	20.48	29.21	12.24	10.07	1.34	0.82	42.34	27.52	1.28
1000	19.60	30.23	10.77	9.00	1.49	0.87	40.80	26.64	1.36
1050	18.23	31.79	9.13	8.34	1.82	0.94	39.74	25.59	1.42
1100	16.68	33.49	7.56	8.67	2.39	1.04	39.34	25.82	1.52
1150	16.82	33.23	6.65	11.00	2.37	1.12	42.00	26.89	1.57
1200	18.19	31.80	6.44	16.45	1.90	1.16	43.95	27.88	1.62

*Typical Performance Data***Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 8.00V, Id = 243.73mA @ Temperature = -45°C

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
1	25.05	29.27	10.86	11.15	1.07	0.53	43.37	26.17	--
3	25.38	28.79	14.31	22.84	1.06	0.56	51.11	26.38	--
5	25.34	28.58	14.91	35.68	1.05	0.55	54.67	26.46	--
7	25.25	28.35	15.12	32.70	1.04	0.54	57.46	26.69	--
9	25.13	28.11	15.28	26.52	1.03	0.53	58.13	26.66	--
10	25.06	27.98	15.35	24.96	1.02	0.53	57.97	26.64	1.36
20	24.41	27.02	15.61	18.71	1.01	0.48	48.09	27.70	1.02
30	23.99	26.52	15.86	17.18	1.01	0.45	50.49	28.21	0.90
40	23.76	26.29	16.14	16.55	1.02	0.44	49.94	28.43	0.78
50	23.62	26.13	16.30	16.41	1.02	0.43	49.05	28.43	0.73
60	23.53	26.05	16.40	16.32	1.02	0.42	49.36	28.55	0.71
70	23.47	26.00	16.52	16.29	1.03	0.42	49.12	28.54	0.71
80	23.43	25.97	16.66	16.37	1.03	0.42	49.30	28.53	0.70
90	23.40	25.96	16.84	16.45	1.03	0.42	49.24	28.62	0.69
100	23.38	25.94	16.98	16.62	1.03	0.42	49.13	28.62	0.68
150	23.32	25.91	17.54	17.38	1.03	0.43	48.75	28.82	0.70
200	23.28	25.93	17.83	18.14	1.04	0.44	48.00	28.83	0.66
250	23.23	25.96	17.86	18.76	1.04	0.45	47.69	28.93	0.62
300	23.17	26.01	17.82	19.82	1.05	0.47	47.75	29.05	0.76
350	23.11	26.08	17.89	21.41	1.05	0.49	47.80	29.06	0.65
400	23.04	26.16	18.31	24.08	1.06	0.52	46.69	29.32	0.67
450	22.95	26.25	18.61	28.75	1.06	0.54	46.05	29.19	0.67
500	22.84	26.38	18.96	31.62	1.07	0.57	45.15	29.22	0.72
550	22.64	26.61	18.77	24.84	1.09	0.62	44.50	29.15	0.70
600	22.42	27.21	16.33	20.57	1.14	0.72	44.02	29.24	0.71
650	22.17	27.14	15.34	29.21	1.14	0.72	44.30	29.43	0.72
700	22.34	27.02	16.30	22.02	1.12	0.68	44.14	29.44	0.74
750	22.25	27.18	16.50	17.85	1.13	0.69	44.00	29.54	0.75
800	22.07	27.41	16.23	15.29	1.14	0.70	43.47	29.39	0.76
850	21.83	27.72	15.63	13.42	1.17	0.72	43.12	29.43	0.77
900	21.51	28.13	14.79	11.87	1.20	0.75	42.63	29.33	0.81
950	21.05	28.68	13.65	10.48	1.26	0.78	42.16	28.95	0.77
1000	20.35	29.52	12.12	9.18	1.36	0.81	41.01	28.22	0.84
1050	19.15	30.89	10.27	8.03	1.58	0.87	39.49	26.86	0.86
1100	17.21	33.08	8.24	7.43	2.13	0.95	37.47	25.93	0.97
1150	15.95	34.32	6.70	8.32	2.68	1.06	37.57	26.22	1.10
1200	17.62	32.43	6.18	11.85	2.04	1.13	39.63	27.51	1.11



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
 The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS



REV. OR

PHA-13HLN+

1/12/2018

Page 4 of 9

*Typical Performance Data***Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 7.60V, Id = 230.34mA @ Temperature = -45°C

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
1	25.03	29.26	10.83	11.13	1.07	0.53	43.38	25.61	--
3	25.36	28.78	14.24	22.78	1.06	0.56	51.84	25.86	--
5	25.32	28.56	14.85	35.21	1.05	0.55	56.19	25.92	--
7	25.23	28.33	15.06	32.71	1.04	0.54	57.20	26.00	--
9	25.11	28.09	15.21	26.61	1.03	0.54	57.39	25.97	--
10	25.04	27.97	15.29	25.05	1.02	0.53	56.09	26.24	1.26
20	24.40	27.00	15.63	18.80	1.01	0.48	49.05	27.21	0.95
30	23.97	26.50	15.93	17.25	1.01	0.45	51.55	27.74	0.87
40	23.74	26.26	16.24	16.63	1.02	0.44	50.63	27.96	0.74
50	23.60	26.11	16.34	16.48	1.02	0.43	49.28	27.95	0.71
60	23.51	26.03	16.45	16.40	1.02	0.42	49.09	28.08	0.72
70	23.45	25.99	16.59	16.37	1.03	0.42	49.85	28.07	0.69
80	23.41	25.95	16.78	16.44	1.03	0.42	48.73	28.17	0.68
90	23.38	25.93	16.92	16.53	1.03	0.42	48.88	28.15	0.66
100	23.36	25.92	17.03	16.68	1.03	0.42	48.96	28.14	0.67
150	23.31	25.89	17.63	17.46	1.03	0.43	48.84	28.35	0.69
200	23.26	25.90	17.93	18.24	1.04	0.44	47.90	28.46	0.67
250	23.21	25.95	17.95	18.86	1.04	0.45	47.47	28.45	0.62
300	23.15	25.99	17.90	19.91	1.04	0.47	47.88	28.67	0.61
350	23.09	26.06	17.99	21.55	1.05	0.49	47.89	28.57	0.60
400	23.02	26.14	18.35	24.22	1.06	0.52	46.81	28.83	0.65
450	22.93	26.24	18.68	28.85	1.06	0.54	46.15	28.71	0.63
500	22.82	26.37	18.99	31.20	1.07	0.57	45.19	28.84	0.68
550	22.62	26.59	18.78	24.57	1.09	0.62	44.59	28.66	0.70
600	22.42	27.20	16.29	20.44	1.14	0.72	44.10	28.77	0.70
650	22.15	27.12	15.35	28.81	1.14	0.72	44.40	28.95	0.68
700	22.32	27.00	16.30	21.87	1.12	0.68	44.35	28.96	0.70
750	22.23	27.16	16.48	17.76	1.13	0.69	44.15	29.05	0.85
800	22.05	27.39	16.21	15.23	1.14	0.70	43.57	28.91	0.75
850	21.81	27.70	15.59	13.38	1.17	0.72	43.26	29.09	0.75
900	21.49	28.11	14.76	11.84	1.20	0.75	42.77	29.01	0.80
950	21.03	28.66	13.62	10.46	1.26	0.78	42.29	28.53	0.74
1000	20.33	29.49	12.09	9.16	1.35	0.81	41.13	27.97	0.79
1050	19.14	30.87	10.25	8.02	1.57	0.87	39.60	26.83	0.86
1100	17.19	33.05	8.23	7.41	2.12	0.95	37.56	25.77	0.92
1150	15.95	34.28	6.69	8.31	2.67	1.06	37.50	25.95	1.07
1200	17.62	32.40	6.18	11.84	2.03	1.13	39.53	27.19	1.08

*Typical Performance Data***Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 8.40V, Id = 257.47mA @ Temperature = -45°C

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
1	25.07	29.29	10.90	11.14	1.07	0.53	43.15	26.84	--
3	25.40	28.81	14.38	22.88	1.06	0.56	50.28	27.07	--
5	25.36	28.60	14.98	36.22	1.05	0.55	53.45	27.13	--
7	25.27	28.37	15.19	32.69	1.04	0.54	56.07	27.08	--
9	25.15	28.12	15.32	26.45	1.03	0.53	56.43	27.33	--
10	25.08	28.00	15.38	24.88	1.02	0.53	55.44	27.30	1.43
20	24.43	27.04	15.59	18.63	1.01	0.48	49.62	28.17	1.09
30	24.00	26.54	15.84	17.12	1.01	0.45	49.78	28.57	0.97
40	23.77	26.31	16.10	16.48	1.02	0.44	48.67	28.78	0.82
50	23.64	26.16	16.23	16.34	1.02	0.43	48.62	28.87	0.77
60	23.55	26.07	16.33	16.26	1.02	0.42	49.64	28.90	0.77
70	23.49	26.02	16.37	16.22	1.03	0.42	48.75	28.89	0.75
80	23.45	26.00	16.59	16.30	1.03	0.42	49.46	28.98	0.73
90	23.41	25.97	16.67	16.39	1.03	0.42	49.36	28.97	0.72
100	23.40	25.95	16.87	16.54	1.03	0.42	49.69	28.96	0.71
150	23.34	25.93	17.41	17.30	1.03	0.43	48.94	29.27	0.72
200	23.29	25.94	17.73	18.05	1.04	0.44	48.12	29.28	0.72
250	23.24	25.99	17.75	18.67	1.04	0.45	47.50	29.27	0.63
300	23.18	26.03	17.70	19.71	1.05	0.47	47.58	29.50	0.69
350	23.13	26.10	17.80	21.32	1.05	0.49	47.56	29.41	0.66
400	23.05	26.18	18.18	23.97	1.06	0.52	46.60	29.67	0.69
450	22.97	26.27	18.52	28.68	1.06	0.54	46.00	29.65	0.70
500	22.86	26.40	18.87	32.12	1.07	0.57	45.11	29.69	0.76
550	22.65	26.63	18.72	25.11	1.09	0.62	44.40	29.52	0.72
600	22.42	27.23	16.29	20.77	1.14	0.73	43.91	29.58	0.73
650	22.18	27.16	15.32	29.65	1.14	0.72	44.11	29.79	0.74
700	22.35	27.04	16.26	22.13	1.12	0.68	44.05	29.89	0.72
750	22.26	27.20	16.48	17.90	1.13	0.69	43.89	29.97	0.73
800	22.08	27.43	16.20	15.33	1.15	0.70	43.32	29.72	0.78
850	21.84	27.74	15.62	13.45	1.17	0.72	42.98	29.83	0.80
900	21.52	28.15	14.77	11.89	1.20	0.75	42.45	29.59	0.83
950	21.06	28.71	13.63	10.50	1.26	0.78	41.98	29.05	0.76
1000	20.35	29.55	12.10	9.20	1.36	0.82	40.84	28.23	0.89
1050	19.15	30.93	10.25	8.05	1.58	0.87	39.30	27.01	0.89
1100	17.20	33.13	8.22	7.46	2.14	0.96	37.32	26.01	1.00
1150	15.97	34.34	6.68	8.38	2.69	1.06	37.53	26.47	1.14
1200	17.63	32.45	6.17	11.94	2.05	1.13	39.60	27.79	1.14

*Typical Performance Data***Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 8.00V, Id = 217.81mA @ Temperature = +95°C

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
1	24.44	29.14	11.53	11.44	1.10	0.58	37.00	24.96	--
3	24.73	28.69	14.74	22.48	1.09	0.61	37.37	25.32	--
5	24.69	28.49	15.28	30.13	1.08	0.61	37.48	25.52	--
7	24.60	28.26	15.45	30.82	1.07	0.60	37.59	25.47	--
9	24.49	28.03	15.59	27.26	1.06	0.59	37.71	25.61	--
10	24.43	27.90	15.62	26.00	1.05	0.59	37.85	25.70	1.61
20	23.84	26.94	15.85	20.05	1.03	0.54	38.13	26.60	1.65
30	23.44	26.43	16.01	18.43	1.03	0.51	39.06	27.02	1.62
40	23.23	26.18	16.15	17.69	1.03	0.50	39.38	27.22	1.47
50	23.10	26.04	16.13	17.41	1.04	0.49	39.62	27.34	1.47
60	23.01	25.96	16.14	17.19	1.04	0.48	39.97	27.42	1.49
70	22.95	25.91	15.99	16.97	1.04	0.48	40.20	27.50	1.47
80	22.91	25.89	16.01	16.89	1.04	0.48	40.48	27.52	1.46
90	22.87	25.88	15.98	16.80	1.04	0.48	40.62	27.60	1.45
100	22.84	25.87	15.89	16.79	1.05	0.48	40.74	27.62	1.44
150	22.76	25.87	15.73	16.94	1.05	0.49	41.04	27.81	1.43
200	22.70	25.90	15.86	17.75	1.05	0.51	40.91	27.81	1.48
250	22.64	25.95	16.25	19.19	1.06	0.53	40.52	27.89	1.43
300	22.58	26.01	16.81	21.84	1.06	0.55	40.76	28.10	1.44
350	22.51	26.08	17.30	25.94	1.07	0.57	40.78	28.00	1.45
400	22.42	26.19	17.70	31.61	1.08	0.60	40.57	28.07	1.47
450	22.30	26.33	17.61	30.01	1.09	0.63	40.18	28.07	1.49
500	22.11	26.53	17.24	24.38	1.11	0.66	39.60	27.91	1.54
550	21.77	26.89	16.03	21.06	1.14	0.72	39.76	27.64	1.55
600	21.71	27.19	14.57	22.32	1.17	0.77	39.75	27.37	1.54
650	21.63	27.13	14.75	19.96	1.16	0.75	40.01	27.73	1.54
700	21.56	27.26	14.67	16.70	1.17	0.75	40.10	27.59	1.55
750	21.37	27.52	14.32	14.52	1.19	0.76	39.89	27.38	1.61
800	21.09	27.87	13.77	12.87	1.22	0.78	39.70	26.95	1.62
850	20.74	28.31	13.05	11.54	1.27	0.80	39.35	26.55	1.65
900	20.26	28.90	12.17	10.44	1.34	0.83	38.80	26.08	1.70
950	19.57	29.71	11.10	9.57	1.46	0.87	38.07	25.37	1.69
1000	18.58	30.85	9.81	9.05	1.69	0.93	36.94	24.64	1.76
1050	17.36	32.22	8.49	9.25	2.08	1.01	36.47	23.90	1.88
1100	16.75	32.85	7.44	10.91	2.36	1.10	36.97	24.55	2.00
1150	17.44	32.13	6.93	14.96	2.12	1.15	39.53	26.00	2.11
1200	18.26	31.35	6.73	21.81	1.84	1.17	40.79	26.87	2.17

*Typical Performance Data***Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 7.60V, Id = 208.64mA @ Temperature = +95°C

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
1	24.46	29.14	11.39	11.48	1.09	0.58	37.17	24.47	--
3	24.75	28.70	14.50	22.68	1.09	0.61	37.56	24.81	--
5	24.71	28.49	15.03	31.05	1.08	0.61	37.70	25.15	--
7	24.62	28.26	15.22	31.55	1.06	0.60	37.83	25.10	--
9	24.51	28.02	15.36	27.41	1.05	0.59	37.96	25.10	--
10	24.45	27.89	15.43	26.03	1.05	0.58	38.05	25.21	1.52
20	23.86	26.93	15.74	19.91	1.02	0.54	38.48	26.13	1.59
30	23.46	26.41	16.05	18.29	1.03	0.51	39.34	26.66	1.53
40	23.25	26.16	16.20	17.53	1.03	0.49	39.52	26.81	1.42
50	23.12	26.01	16.26	17.26	1.03	0.48	39.99	26.93	1.39
60	23.03	25.93	16.23	17.02	1.04	0.48	40.35	27.07	1.41
70	22.97	25.89	16.16	16.83	1.04	0.47	40.70	27.10	1.40
80	22.92	25.86	16.12	16.74	1.04	0.47	40.72	27.18	1.40
90	22.89	25.85	16.08	16.66	1.04	0.47	40.84	27.19	1.39
100	22.86	25.85	16.04	16.66	1.04	0.48	40.97	27.20	1.41
150	22.78	25.84	15.86	16.77	1.05	0.48	41.29	27.46	1.42
200	22.72	25.88	15.97	17.56	1.05	0.50	41.12	27.47	1.41
250	22.66	25.92	16.41	18.97	1.06	0.52	40.81	27.47	1.35
300	22.60	25.98	16.93	21.53	1.06	0.55	41.08	27.69	1.36
350	22.53	26.05	17.45	25.37	1.07	0.57	41.03	27.59	1.38
400	22.43	26.16	17.80	30.29	1.08	0.59	40.84	27.75	1.40
450	22.31	26.30	17.72	29.46	1.09	0.62	40.51	27.75	1.43
500	22.13	26.50	17.30	24.31	1.11	0.66	39.95	27.63	1.46
550	21.78	26.86	16.07	20.98	1.14	0.72	40.15	27.36	1.43
600	21.71	27.15	14.59	22.20	1.17	0.76	40.19	27.13	1.44
650	21.65	27.09	14.78	20.06	1.16	0.74	40.48	27.46	1.45
700	21.57	27.22	14.70	16.81	1.16	0.74	40.62	27.33	1.46
750	21.38	27.48	14.35	14.61	1.19	0.76	40.43	27.16	1.66
800	21.11	27.82	13.78	12.95	1.22	0.78	40.28	26.74	1.54
850	20.76	28.26	13.06	11.61	1.26	0.80	39.92	26.36	1.56
900	20.28	28.84	12.19	10.49	1.33	0.83	39.41	25.90	1.60
950	19.60	29.64	11.11	9.61	1.45	0.87	38.61	25.21	1.60
1000	18.62	30.76	9.82	9.06	1.67	0.93	37.40	24.48	1.72
1050	17.40	32.12	8.49	9.24	2.05	1.01	36.96	23.88	1.79
1100	16.81	32.74	7.44	10.84	2.31	1.10	37.59	24.39	1.92
1150	17.49	32.02	6.94	14.75	2.08	1.15	40.72	25.73	2.01
1200	18.30	31.24	6.75	21.27	1.82	1.17	42.10	26.46	2.07



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
 The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS



*Typical Performance Data***Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)









Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)







TEST CONDITIONS: Vd = 8.40V, Id = 224.61mA @ Temperature = +95°C

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
1	24.37	29.14	11.72	11.39	1.10	0.58	36.76	25.36	--
3	24.65	28.69	15.03	22.18	1.09	0.61	37.15	25.75	--
5	24.61	28.49	15.56	28.93	1.08	0.61	37.25	25.94	--
7	24.53	28.27	15.72	29.84	1.07	0.60	37.34	25.92	--
9	24.42	28.03	15.83	27.06	1.06	0.60	37.43	26.03	--
10	24.36	27.90	15.84	25.91	1.06	0.59	37.57	26.01	1.81
20	23.77	26.96	15.96	20.29	1.03	0.55	37.72	26.93	1.83
30	23.38	26.45	16.05	18.70	1.03	0.52	38.58	27.37	1.76
40	23.17	26.20	16.09	17.96	1.04	0.51	39.09	27.56	1.62
50	23.05	26.06	16.07	17.69	1.04	0.50	39.36	27.67	1.61
60	22.96	25.98	16.00	17.46	1.04	0.49	39.76	27.76	1.63
70	22.90	25.93	15.91	17.27	1.04	0.49	39.94	27.84	1.61
80	22.85	25.91	15.86	17.17	1.05	0.49	40.09	27.86	1.59
90	22.82	25.89	15.79	17.08	1.05	0.49	40.28	27.95	1.58
100	22.79	25.89	15.79	17.08	1.05	0.49	40.40	27.97	1.63
150	22.71	25.89	15.60	17.23	1.05	0.50	40.72	28.16	1.61
200	22.65	25.93	15.72	18.07	1.06	0.52	40.64	28.17	1.61
250	22.59	25.97	16.12	19.58	1.06	0.54	40.22	28.24	1.55
300	22.53	26.03	16.68	22.40	1.07	0.56	40.38	28.37	1.67
350	22.47	26.11	17.17	26.90	1.08	0.58	40.48	28.34	1.61
400	22.37	26.22	17.56	33.41	1.08	0.61	40.24	28.39	1.63
450	22.24	26.36	17.50	29.83	1.10	0.63	39.83	28.39	1.63
500	22.06	26.56	17.14	24.09	1.11	0.67	39.24	28.22	1.69
550	21.72	26.94	15.93	20.95	1.15	0.73	39.31	27.90	1.64
600	21.62	27.22	14.52	22.22	1.18	0.77	39.26	27.65	1.64
650	21.58	27.17	14.68	19.63	1.17	0.75	39.54	27.89	1.66
700	21.50	27.31	14.60	16.45	1.17	0.75	39.60	27.73	1.70
750	21.31	27.57	14.25	14.33	1.20	0.76	39.37	27.52	1.81
800	21.03	27.92	13.70	12.72	1.23	0.78	39.16	27.08	1.75
850	20.68	28.37	12.98	11.42	1.28	0.80	38.78	26.67	1.80
900	20.18	28.97	12.11	10.34	1.35	0.83	38.20	26.19	1.84
950	19.49	29.79	11.06	9.51	1.48	0.87	37.52	25.47	1.87
1000	18.49	30.94	9.78	9.03	1.72	0.93	36.48	24.71	1.94
1050	17.27	32.32	8.47	9.29	2.13	1.01	35.96	23.97	2.02
1100	16.69	32.94	7.43	11.03	2.41	1.10	36.41	24.68	2.12
1150	17.37	32.21	6.92	15.23	2.16	1.16	38.61	26.30	2.22
1200	18.19	31.45	6.71	22.22	1.88	1.17	39.76	27.22	2.32

Typical Performance Curves

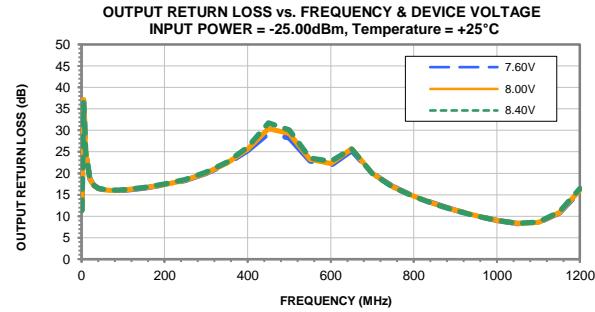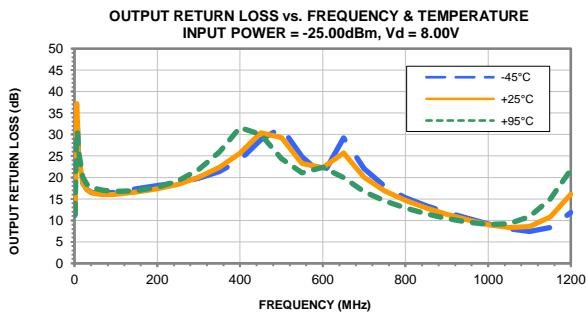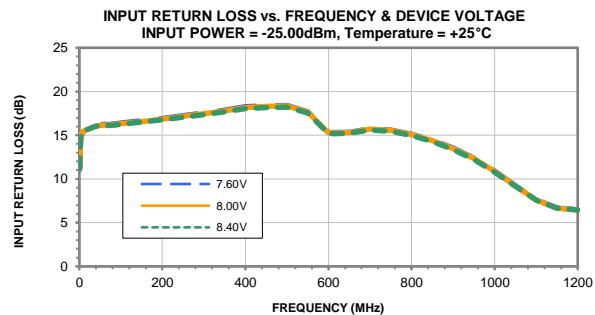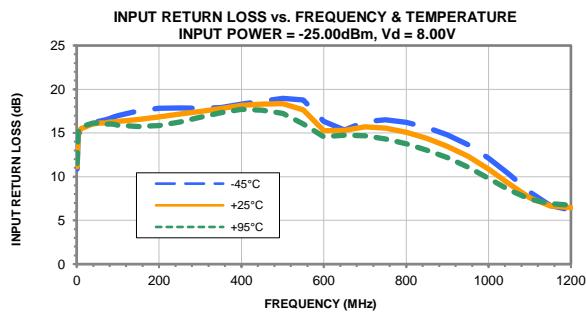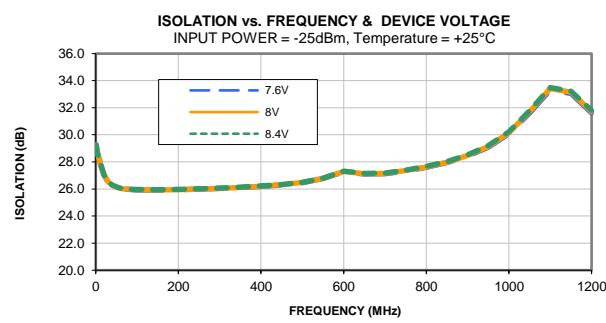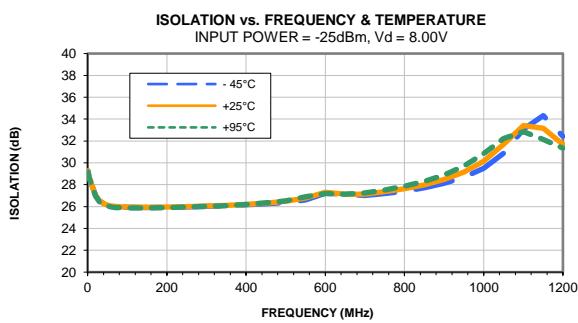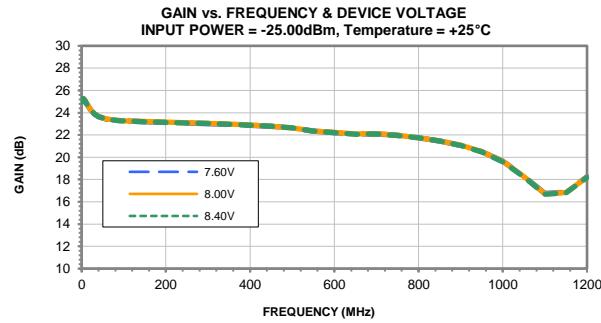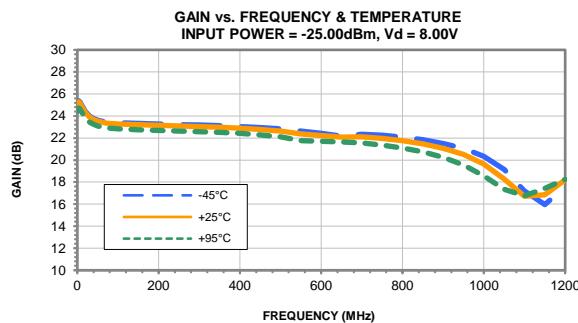

Typical Performance Curves

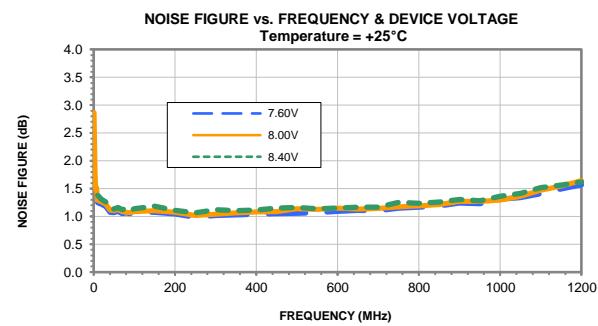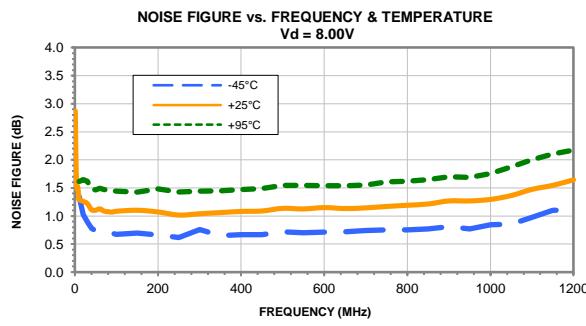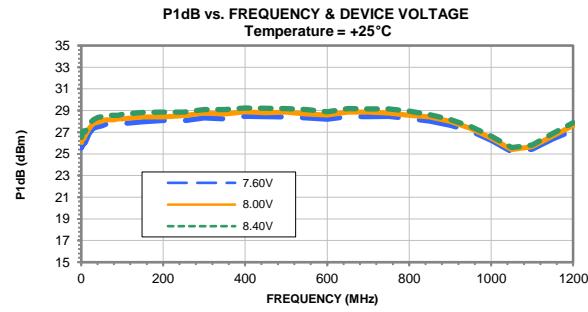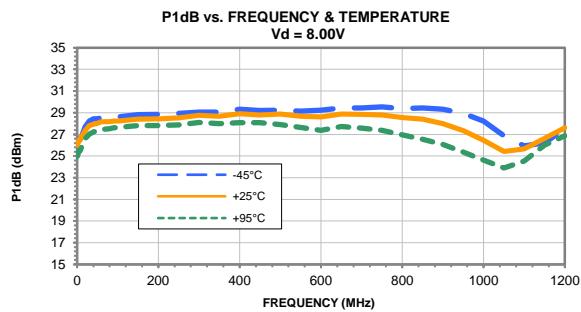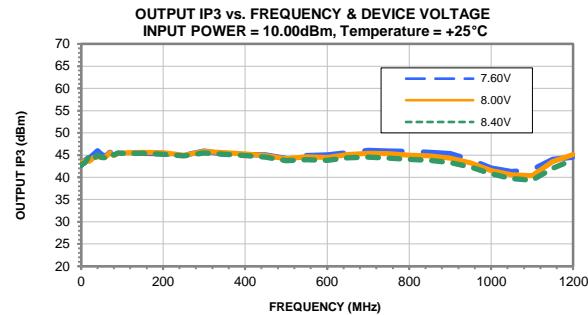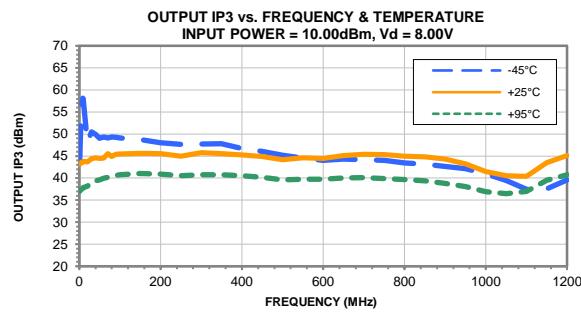


Case Style


DF

DF782

Outline Dimensions

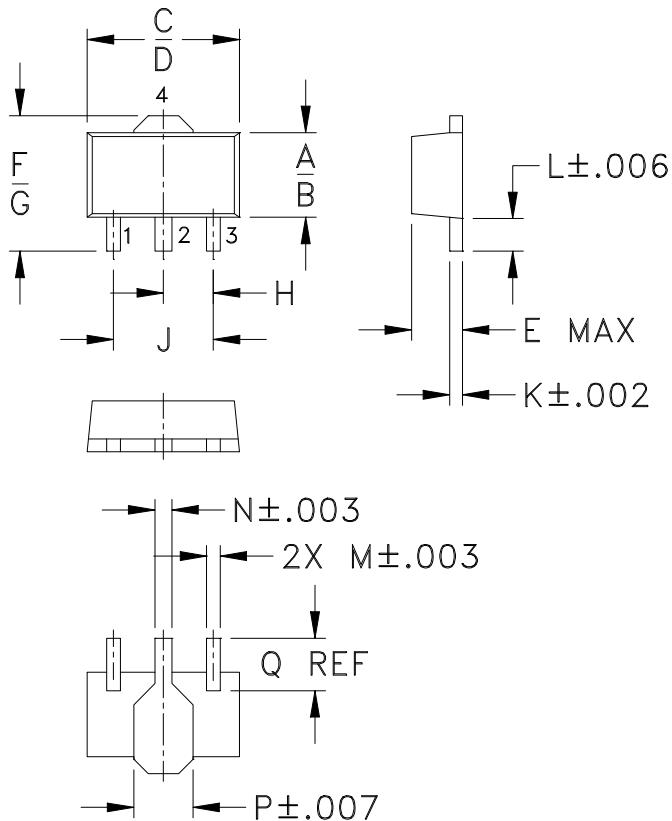

PCB Land Pattern

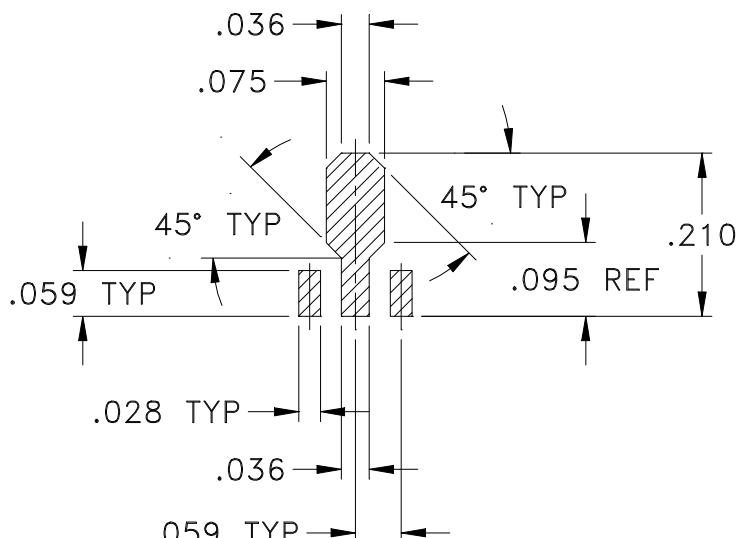

Suggested Layout,
Tolerance to be within ±.002

CASE #	A	B	C	D	E	F	G	H	J	K	L	M
DF782	.102 (2.59)	.090 (2.29)	.181 (4.60)	.173 (4.39)	.063 (1.60)	.167 (4.24)	.155 (3.94)	.059 (1.50)	.118 (3.00)	.015 (0.38)	.041 (1.04)	.016 (0.41)

CASE #	N	P	Q	WT. GRAM
DF782	.019 (0.48)	.065 (1.65)	.062 (1.57)	.2

Dimensions are in inches (mm). Tolerances: 2 Pl. ±.01; 3Pl. ±.005

Notes:

1. Case material: Plastic.
2. Termination finish:
For RoHS Case Styles: Tin-Silver alloy plate over Nickel barrier or Matte-Tin.
All models, (+) suffix. See model Data sheet.
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.



Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010


Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Tape & Reel Packaging TR-F55

DEVICE ORIENTATION IN T&R

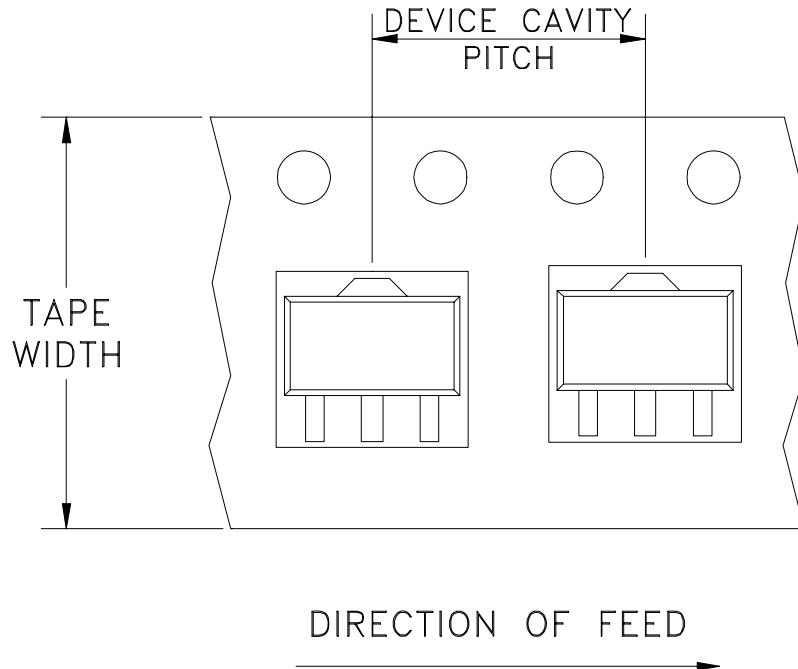

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
12	8	7	Small quantity standard (see note)	20
			50	50
			100	100
			200	200
			500	500
			Standard	1000

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M162958	NEW RELEASE	08/11/17	CA	RS

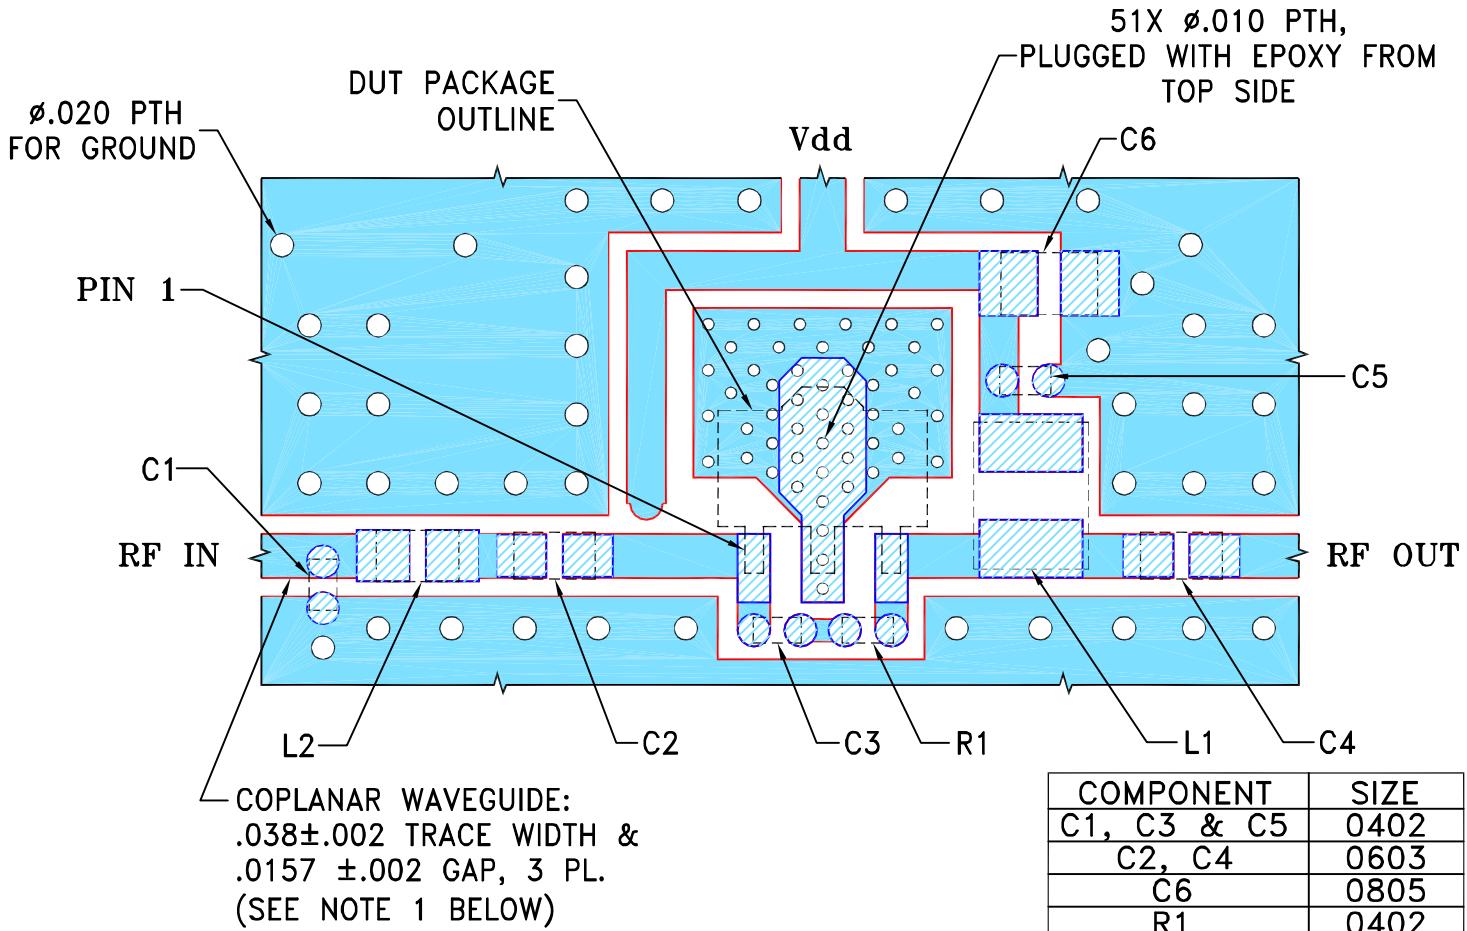SUGGESTED MOUNTING CONFIGURATION FOR
DF782 CASE STYLE, "04AM03" PIN CONNECTION

COMPONENT	SIZE
C1, C3 & C5	0402
C2, C4	0603
C6	0805
R1	0402
L1	1210
L2	0603

NOTES:

1. TRACE WIDTH AND GAP PARAMETERS ARE SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .020" ±0015; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. CHIP COMPONENT FOOT PRINTS SHOWN FOR REFERENCE. FOR COMPONENT VALUES REFER TO TB-969-13HNL+ AND TB-969-13LN+.
3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC
(SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

TOLERANCES ON:

2 PL DECIMALS ±

3 PL DECIMALS ± .005

ANGLES ±

FRACTIONS ±

DRAWN

CHECKED

APPROVED

CA

GF

RS

08/07/17

08/11/17

08/11/17



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235



PL, 04M03, DF782, TB-969-13(H)LN+

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-523	OR
FILE: 98PL523	SCALE: 6:1	SHEET: 1 OF 1	

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS.
EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE
AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY
DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO.
THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEET1.DWG REV:A DATE:01/12/95

Evaluation Board and Circuit

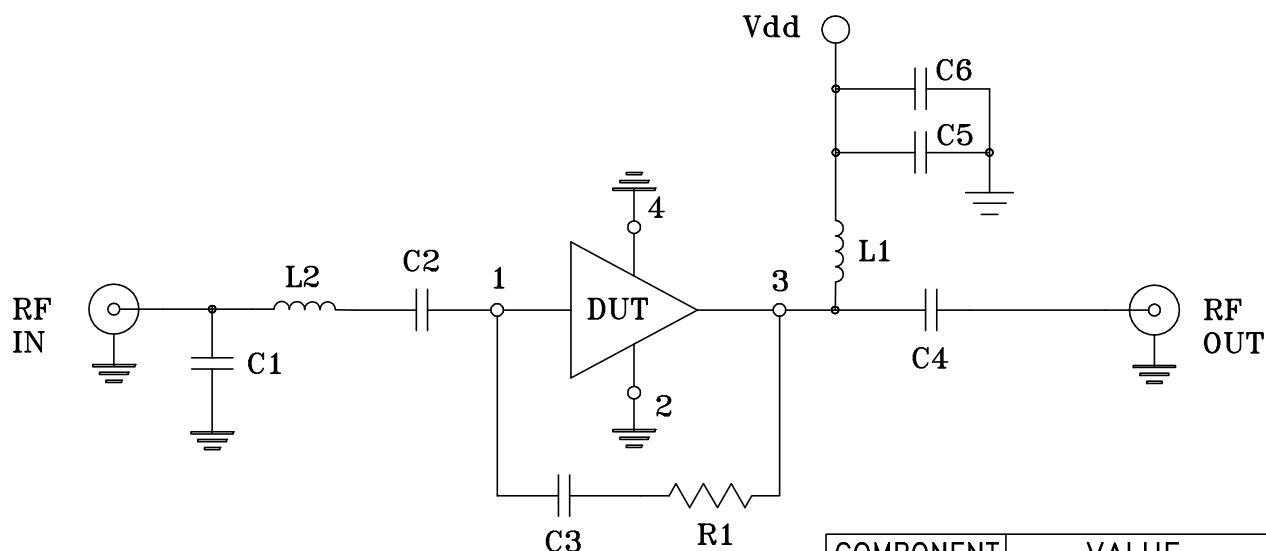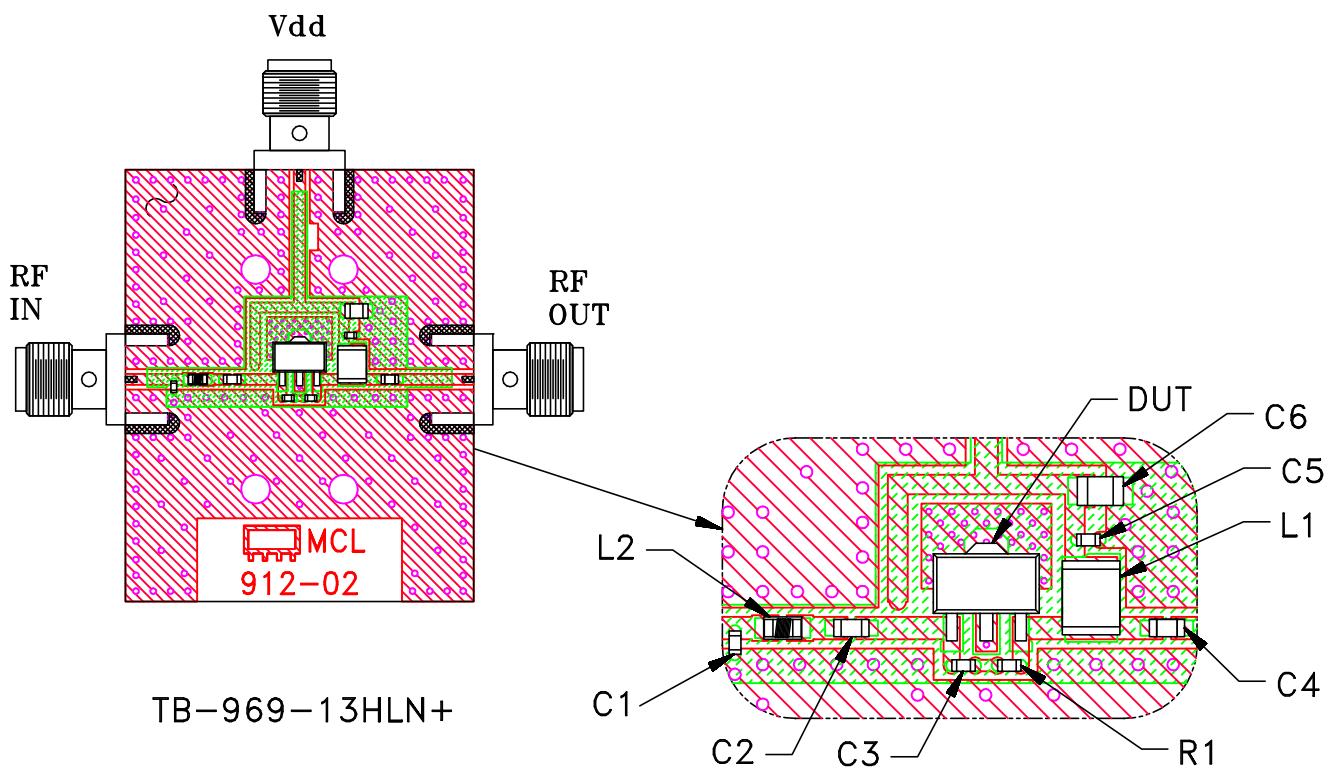

Schematic Diagram

Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: RO4350 or equivalent,
Dielectric Constant=3.5, Thickness=.020 inch.

COMPONENT	VALUE	SIZE
DUT	PHA-13HLN+	SOT-89
C1	Capacitor 1.5 pF	0402
C2,C4	Capacitor 2.2 uF	0603
C3	Capacitor 0.1 uF	0402
C5	Capacitor 0.001 uF	
C6	Capacitor 10 uF	0805
R1	Resistor 1.5 KOhm	0402
L1	Inductor 15 uH	1210
L2	Inductor 5.1 nH	0603

Mini-Circuits®

**Environmental Specifications****ENV08T9**

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 95° C / 105° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C or -65° to 150° Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Mechanical Shock	1.5Kg, 0.5 ms, 5 shock pulses, Y1 direction only	MIL-STD-883, Method 2002, Condition B, except Y1 direction only
Vibration (Variable Frequency)	50g peak	MIL-STD-883, Method 2007, Condition B
Autoclave	15 psig, 100% RH, 121°C, 96 hours	JESD22-A102-C, Condition C
HAST	130°C, 85% RH, 96 hours	JESD22-A110
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Solder Reflow Heat	Sn-Pb Eutetic Process: 240°C peak Pb-Free Process: 260°C peak	J-STD-020C, Table 4-1, 4-2 and 5-2; Figure 5-1
Moisture Sensitivity: Level 1	Bake at 125°C for 24 hours. Soak at 85°C/85%RH for 168 hours Reflow 3 cycles at 260°C peak	J-STD-020
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + propylene glycol monomethyl ether +	MIL-STD-202, Method 215



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
	monoethanolamine at 63°C to 70°C	