

Surface Mount Voltage Controlled Oscillator

ROS-535+

Linear Tuning 300 to 525 MHz



CASE STYLE: CK605

Features

- wide band tuning
- low phase noise, -138 dBc/Hz at 1 MHz offset, typ.
- linear tuning
- excellent harmonic suppression, -20 dBc typ.
- aqueous washable

Applications

- test instruments-signal generators
- UHF

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

FREQUENCY (MHz)		POWER OUTPUT (dBm)	TUNING VOLTAGE (V)		PHASE NOISE (dBc/Hz) SSB at offset frequencies: Typ.				PULLING pk-pk @ 12 dB (MHz)	PUSHING (MHz/V)	TUNING SENSITIVITY (MHz/V)	HARMONICS (dBc)		3 dB MODULATION BANDWIDTH (MHz)	DC OPERATING POWER	
Min.	Max.	Typ.	Min.	Max.	1 kHz	10 kHz	100 kHz	1 MHz	Typ.	Typ.	Typ.	Typ.	Max.	Typ.	Vcc (volts)	Current (mA) Max.
300	525	+6.0	1	17	-75	-98	-118	-138	0.5	0.4	9-27	-20	-15	0.1	12	20

Pin Connections

RF OUT	10
VCC	14
V-TUNE	2
GROUND	1,3,4,5,6,7,8,9,11,12,13,15,16

Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	13V
Absolute Max. Tuning Voltage (Vtune)	18V
All specifications	50 ohm system


Permanent damage may occur if any of these limits are exceeded.

Tape & Reel: F37


7" Reels with 10, 20, 50, 100 devices
13" Reels with 200, 500 devices

Environmental Ratings: ENV65

Outline Drawing

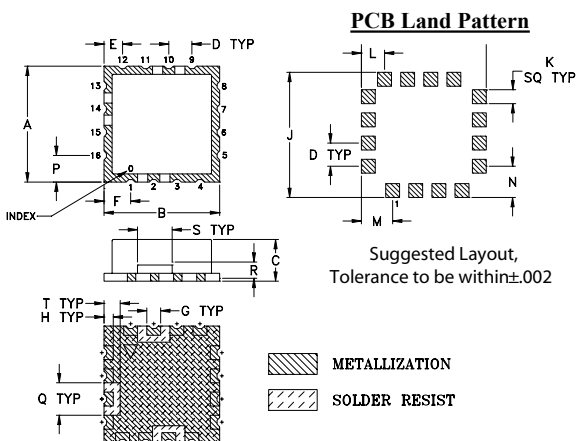

Demo Board MCL PIN: TB-10
Suggested PCB Layout (PL-012)

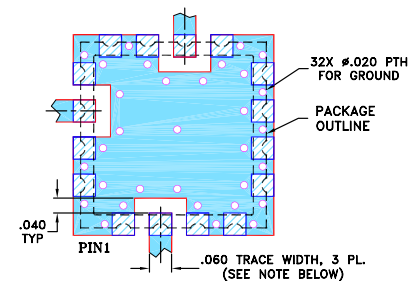

- NOTES: 1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.500	.500	.180	.100	.080	.115	.060	.040	.540	.060	.100	.135	.135	.115	.140	.070	.150	.070	grams
12.70	12.70	4.57	2.54	2.03	2.92	1.52	1.02	13.72	1.52	2.54	3.43	3.43	2.92	3.56	1.78	3.81	1.78	1.0


Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp





Performance Data & Curves


ROS-535+

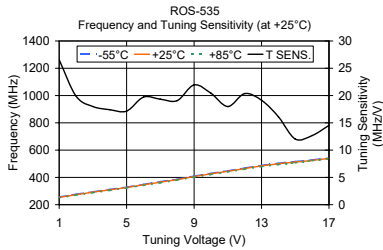

V TUNE	TUNING SENS. (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)		
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C
1.00	26.56	256.90	253.31	250.30	7.65	8.20	7.17
2.00	19.90	276.80	273.22	269.89	7.93	8.32	8.23
3.00	17.98	294.53	291.20	288.06	8.14	8.51	7.87
4.00	17.41	312.58	308.61	304.45	7.91	8.73	8.63
5.00	17.15	328.96	325.76	322.94	7.32	7.85	7.87
6.00	19.71	349.18	345.47	341.76	8.14	8.18	8.56
7.00	19.33	369.22	364.80	360.00	7.26	9.03	8.10
8.00	19.07	387.26	383.87	380.54	7.93	7.80	8.00
9.00	21.95	409.98	405.82	402.11	6.67	7.98	7.20
10.00	20.42	430.21	426.24	421.25	7.47	7.00	7.47
11.00	17.98	448.26	444.22	440.51	6.02	6.64	6.34
12.00	20.35	469.06	464.58	460.48	6.47	6.79	6.24
13.00	19.14	488.26	483.71	478.85	4.77	5.43	5.67
14.00	16.13	504.38	499.84	494.46	4.85	5.26	5.39
15.00	12.03	516.48	511.87	506.82	4.75	5.62	6.00
16.00	12.67	528.77	524.54	522.24	4.31	6.31	4.86
17.00	14.53	542.85	539.07	534.85	4.62	4.79	4.62

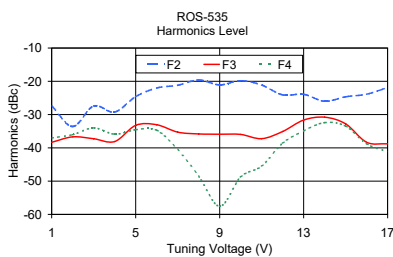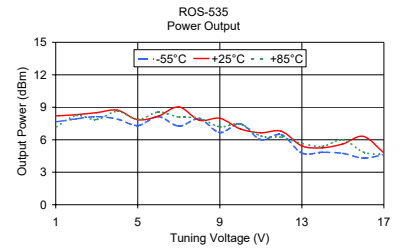

V TUNE	HARMONICS (dBc)			FREQ. PUSHING (MHz/V)
	F2	F3	F4	
1.00	-27.38	-38.33	-37.02	0.26
2.00	-33.58	-36.70	-36.04	-0.06
3.00	-27.41	-37.27	-33.99	0.19
4.00	-29.24	-38.10	-35.89	-0.19
5.00	-24.60	-33.24	-34.54	0.32
6.00	-22.01	-33.06	-34.68	-0.06
7.00	-21.20	-35.28	-40.46	-0.32
8.00	-19.59	-35.82	-48.52	0.19
9.00	-21.06	-35.91	-57.57	0.00
10.00	-19.80	-35.96	-48.72	-0.26
11.00	-21.11	-37.25	-45.48	0.32
12.00	-24.06	-35.08	-38.59	0.19
13.00	-23.89	-31.64	-34.89	-0.06
14.00	-25.99	-30.78	-32.40	-0.13
15.00	-24.64	-32.79	-33.44	-0.58
16.00	-23.87	-38.34	-38.77	0.64
17.00	-21.87	-38.79	-41.19	0.45

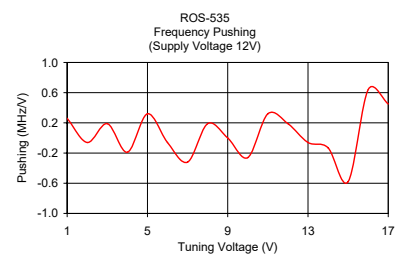

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp